
INCH-POUND
MIL-DTL-9395/2E
w/Amendment 1
17 February 2017
SUPERSEDING
MIL-DTL-9395/2E
8 December 2003

DETAIL SPECIFICATION SHEET

SWITCHES, PRESSURE, (GAGE), TYPE II, SPDT, 4 AMPERES

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the pressure switches described herein shall consist of this document and the latest issue of Specification MIL-DTL-9395.

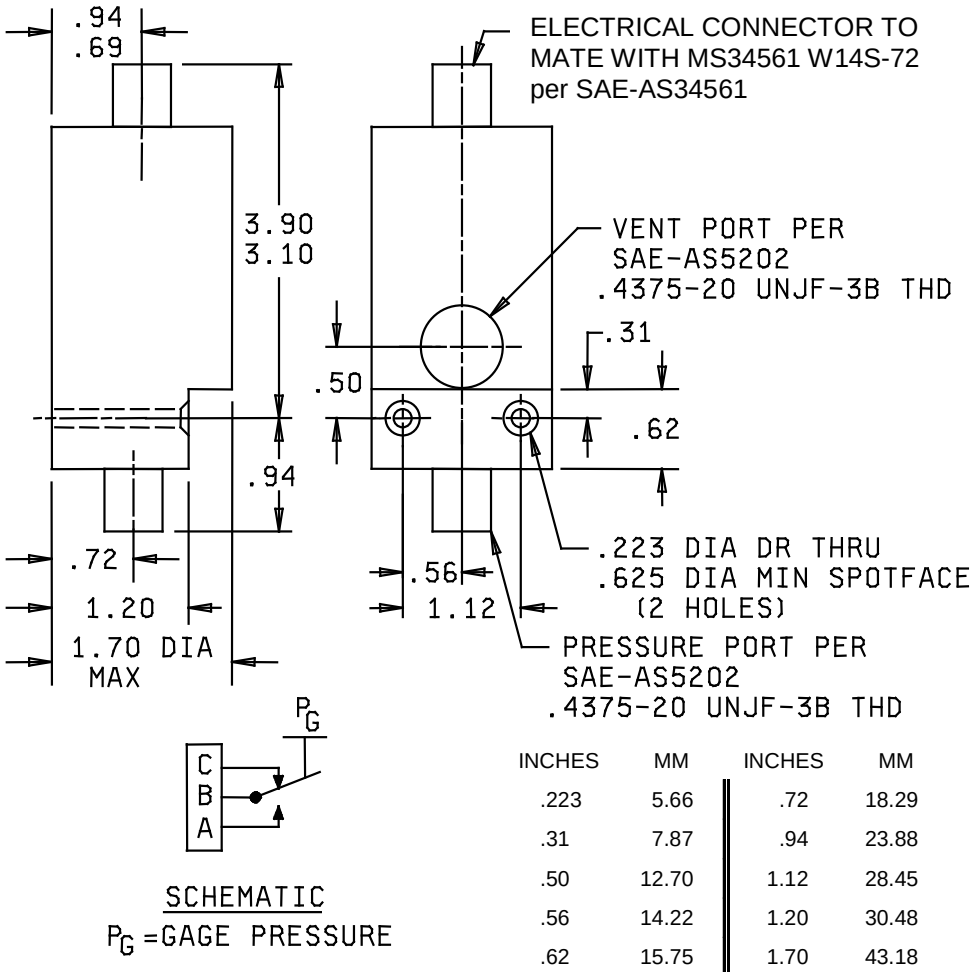


INCHES	MM	INCHES	MM
.223	5.66	.72	18.29
.31	7.87	.94	23.88
.50	12.70	1.12	28.45
.56	14.22	1.20	30.48
.62	15.75	1.70	43.18
.625	15.88	3.10	78.74
.69	17.53	3.90	99.06

Configuration 1

FIGURE 1. Switches.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:11Z
Check the source to verify that this is the current version before use.

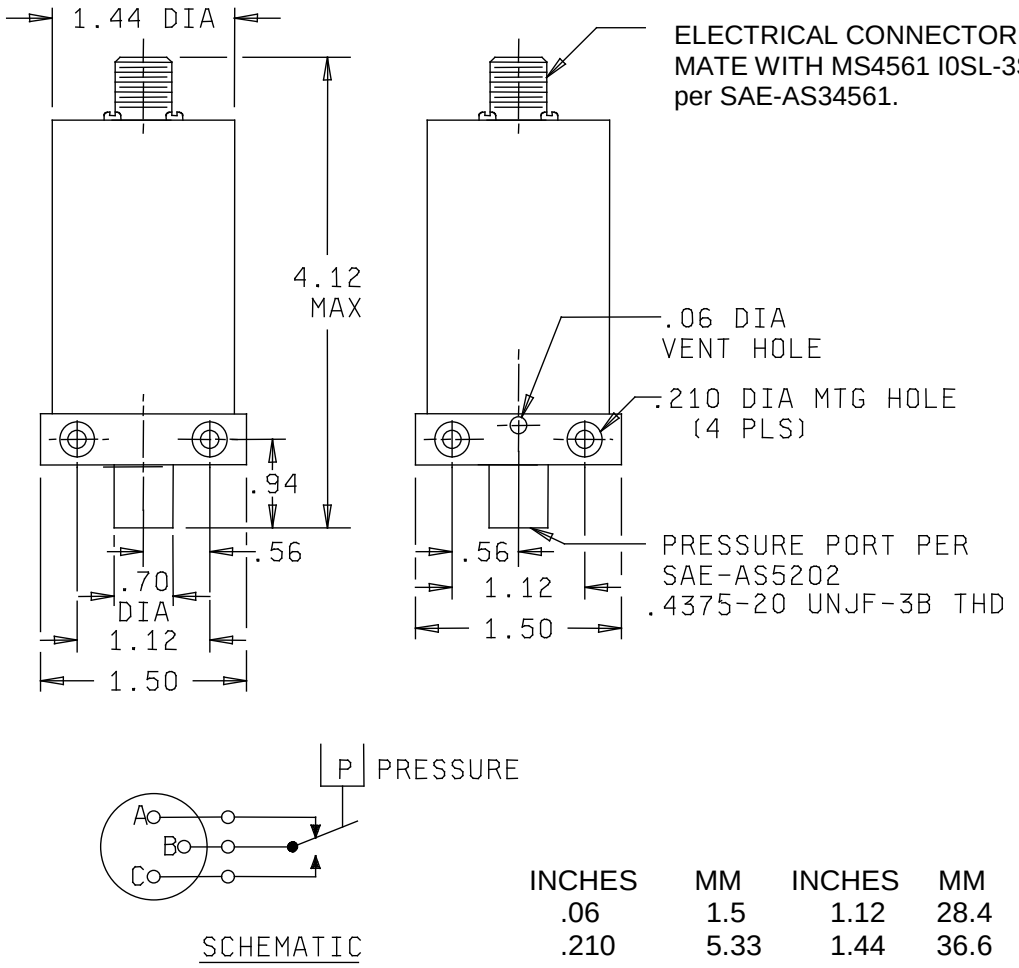

INCHES	MM	INCHES	MM
.06	1.5	1.12	28.4
.210	5.33	1.44	36.6
.56	14.2	1.50	38.1
.70	17.8	4.12	104.6
.94	23.9		

Configuration 2

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1 inch = 25.4 mm.
3. Unless otherwise specified, tolerances are ±.005 (.13 mm) for three decimals and ±.02 (.51 mm) for two decimals.
4. Exact shape of switch optional provided dimensions specified are not exceeded.
5. Schematic illustrated at sea level barometric pressure 29.92 in (759.97 mmHg).

FIGURE 1. Switches - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:11Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions, configuration, and electrical schematic: See figure 1.

Weight: 9 ounces maximum.

Calibration: See table I.

Proof pressure: 4,500 lb_f/in^2.
Vent port proof pressure (configuration 1 only): Leakage from the return vent port shall not exceed 1 drop per minute with system pressure applied to pressure port.

System pressure: 3,000 lb_f/in^2.

Burst pressure: 7,500 lb_f/in^2.

Electrical ratings:
Operating voltage - 28 Vdc.
Current rating - 4 amperes resistive.
2 amperes inductive (L/R ratio = .026)

Seal:
Electrical chamber: Unsealed.
Pressure chamber: Water tight.
Reference chamber: Unsealed.

Media: Hydraulic fluid per MIL-PRF-6083, MIL-PRF-46170, MIL-PRF-83282 or MIL-PRF-87257.

High temperature (operating and nonoperating): B (+275°F).

Low temperature (operating and nonoperating): D (-65°F).

Altitude: C (70,000 feet).

Shock: C (100 G).

Vibration: S (test condition D, MIL-STD-202-204, except 10 - 2,000 Hz, 20 G).

Life:
Mechanical - A (100,000 cycles).
Electrical - A (100,000 cycles).

Acceleration: B (4 G).

Pulsation amplitude: C (5 percent).

Pulsation frequency: D (500 ±50 Hz).

Pressure rise: F (500,000 lb_f/in^2).

Dielectric withstanding voltage (at reduced barometric pressure): Applicable.

Connector torque: Applicable.

Part number: M9395/2- (dash number from table I).

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:11Z
Check the source to verify that this is the current version before use.

TABLE I. Dash number and pressure switch settings.

Dash no.	Pressure switch settings		Minimum dead band	Configuration
	Increasing lb_f/in^2	Decreasing lb_f/in^2	lb_f/in^2	
01	1,200 ±250	By 700	100	1
02	2,900 ±150	By 2,400	200	1
03	By 2,000	At 1,700 ±100	---	2
04	By 2,875	At 2,600 ±100	---	2

Changes from previous issues: The margins of this specification are marked with vertical lines to indicate where modifications from this amendment were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

Referenced documents. In addition to MIL-DTL-9395, this specification sheet references the following documents.

MIL-PRF-6083
MIL-PRF-46170
MIL-PRF-83282
MIL-PRF-87257
MIL-STD-202-204
SAE-AS5202
SAE-AS-34561

Custodians:
Army - CR
Navy - EC
Air Force - 11
DLA - CC

Review activities:
Navy - AS, MC
Air Force – 99

Preparing activity:
DLA - CC

(Project 5930-2017-009)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil/ .

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:11Z
Check the source to verify that this is the current version before use.