
MILITARY SPECIFICATION SHEET


SWITCHES, PRESSURE, (GAGE), TYPE II, SPST, 5 AMPERES

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the pressure switches described herein shall consist of this document and the latest issue of Specification MIL-S-9395.

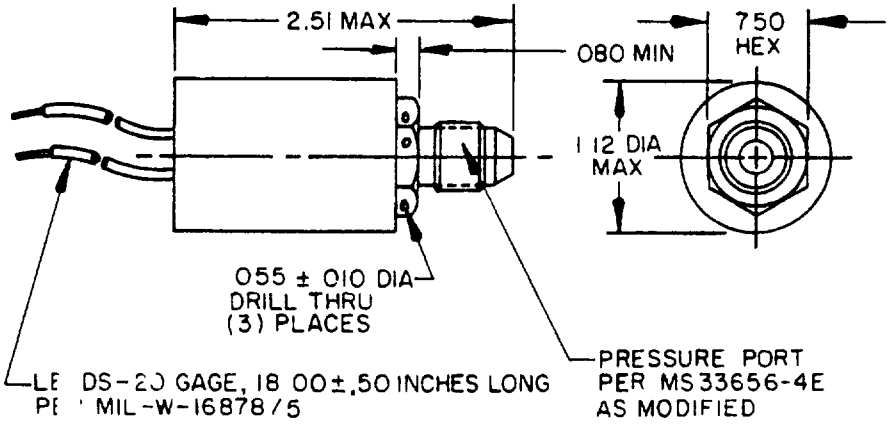

INCHES	MM
010	.25
.055	1 40
080	2 03
50	12 70
.750	19 05
1 12	28 45
2.51	63 75
18 00	457 20



SCHEMATIC
SHOWN AT
ZERO PRESSURE

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Unless otherwise specified, tolerances are ±.005 (13 mm) for three decimals and ±.02 (.51 mm) for two place decimals.
4. Exact shape of switch optional provided dimensions pecified are not exceeded.

FIGURE 1 Switches.

Source: https://assist.dla.mil -- Downloaded: 202610-17T12:12Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and electrical schematic· See figure 1.

Weight 0.2 pound maximum.

Calibration· See tables I, II, III, and IV.

Proof pressure: 4500 lb_f/in^2.

System pressure: 3000 lb_f/in^2.

Burst pressure: 7500 lb_f/in^2.

Electrical ratings:
Operating voltage - 28 Vdc.
Current rating - 5 amperes resistive.
2.5 amperes inductive.

Seal:
Electrical chamber· Hermetic.
Pressure chamber: Hermetic.
Reference chamber: Sealed or unsealed.

Pressure port: See figure 1.

Media· Hydraulic fluid per MIL-H-5606 or MIL-H-83282.

High temperature (operating and nonoperating) B (+275°F).

Low temperature (operating and nonoperating). D (-65°F).

Altitude. C (70,000 feet).

Shock· C (100 G).

Vibration: S (test condition D, method 204 of MIL-STD-202).

Life (mechanical). A (100,000 cycles).

Life (electrical). C (50,000 cycles).

Acceleration C (8 G).

Pulsation amplitude· C (5 percent)

Pulsation frequency. D (500 ±50 Hz).

Pressure rise· F (500,000 lb_f/in^2).

Dielectric withstanding voltage (at reduced barometric pressure) Applicable.

Terminal strength (wire-lead terminals) Method 211 of MIL-STD-202, test condition A, except apply 25 pounds for 5 minutes in a direction straight away from the switch.

QUALIFICATION.

Single submission: Restricted to switch submitted.
Group submission: See table V.

PART NUMBER Consists of the prefix "M9395/5-" followed by a five-character code. The code identifies the pressure setting mode (code from table I), high-pressure setting to within 100 lb_f/in^2 (code from table II) followed by high-pressure setting to within 25 lb_f/in^2 and applicable tolerance (code from table III), and low-pressure setting to within 100 lb_f/in^2 (code from table II) followed by low-pressure setting to within 25 lb_f/in^2 and applicable tolerance (code from

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:12Z
Check the source to verify that this is the current version before use.

table III). The five-character code used in the following example identifies a switch which actuates on increasing pressure at 300 ±25 lb_f/in^2, and deactuates on decreasing pressure at 150 ±25 lb_f/in^2.

EXAMPLE

M9395/5- A CA AC

PREFIX.

PRESSURE SETTING MODE = Code "A" of table I.

HIGH-PRESSURE SETTING = Code "C" of table II (300 lb_f/in^2) and Code "A" of table III (0, ±25 lb_f/in^2)

LOW-PRESSURE SETTING = Code "A" of table II (100 lb_f/in^2) and Code "C" of table III (+50, ±25 lb_f/in^2).

TABLE I. Codes for pressure setting modes

Code	Pressure setting mode	
	High setting	Low setting
A - - - -	At (or max) 1/	At (or min) 1/
B - - - -	At (or max) 1/	Differential 2/
C - - - -	Differential 2/	At (or min) 1/

1/ Setting values are designated by codes from tables II and III.
2/ Setting values are designated by codes from table IV

TABLE II. Codes for pressure settings to within 100 lb_f/in^2

Code	Pressure (lb_f/in^2)	Code	Pressure (lb_f/in^2)	Code	Pressure (lb_f/in^2)
A - - -	100	L - - -	1100	W - - -	2100
B - - -	200	M - - -	1200	X - - -	2200
C - - -	300	N - - -	1300	Y - - -	2300
D - - -	400	P - - -	1400	Z - - -	2400
E - - -	500	Q - - -	1500	1 - - -	2500
F - - -	600	R - - -	1600	2 - - -	2600
G - - -	700	S - - -	1700	3 - - -	2700
H - - -	800	T - - -	1800	4 - - -	2800
J - - -	900	U - - -	1900	5 - - -	2900
K - - -	1000	V - - -	2000	6 - - -	3000

Source: https://assist.dla.mil -- Downloaded: 202610-17T12:12Z
Check the source to verify that this is the current version before use.

TABLE III. Codes for pressure settings to within 25 lb_f/in^2 and tolerances.

	Unit				Tolerance (lb_f/in^2)
	0	+25	+50	+75	
Code - - -	A	B	C	D	±25
Code - - -	E	F	G	H	±50
Code - - -	J	K	L	M	±75
Code - - -	N	P	Q	R	±100
Code - - -	S	T	U	V	±150
Code - - -	W	X	Y	Z	±200
Code - - -	1	2	3	4	±300
Code - - -	5	6	7	8	±400
Code - - -	9	0	I	-	Min or Max

TABLE IV. Codes for differential pressure settings.

Code	Differential value (lb_f/in^2)	Code	Differential value (lb_f/in^2)
A - - -	0	M - - -	275
B - - -	25	N - - -	300
C - - -	50	P - - -	325
D - - -	75	Q - - -	350
E - - -	100	R - - -	375
F - - -	125	S - - -	400
G - - -	150	T - - -	425
H - - -	175	U - - -	450
J - - -	200	V - - -	475
K - - -	225	W - - -	500
L - - -	250		

TABLE V. Extent of qualification.

Part number	Number of samples required	Tests	Qualifies
M9395/5-AADAA	1 each inductive	Complete per qualification inspection of MIL-S-9395	All configurations
-AADAA	1 each resistive		
-A4ZXV	1 each inductive		
-A4ZXV	1 each resistive		

SUPERSESSION DATA. Part number M9395/5-01 is superseded by part number M9395/5-AJEF-.

NOTES:
1. Design limitations (actuation values and tolerances, deadband and deactuation values and tolerances) should be coordinated with manufacturer(s) listed on the QPL for this specification sheet before specifying a particular "M" number. The fact that operating characteristics can be coded does not necessarily mean that it can be manufactured or procured.
2. Revision letters are not used in this revision to identify changes with respect to the previous issue, due to the extensiveness of the changes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:12Z
Check the source to verify that this is the current version before use.

Custodians
Army - ER
Navy - EC
Air Force - 85

Review activities
Army - MO
Navy - SH, WP
Air Force - 11, 17, 99
DLA - ES

User activity.
Navy - MC

Preparing activity.
Air Force - 85

(Project 5930-1113-6)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:12Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS This form is provided to solicit beneficial comments which may improve this document and enhance its use DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government Fold on lines on reverse side, staple in corner, and send to preparing activity Attach any pertinent data which may be of use in improving this document If there are additional papers, attach to form and place both in an envelope addressed to preparing activity A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed

NOTE This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements

DOCUMENT IDENTIFIER *(Number)* AND TITLE

MIL-S-9395/5C, 23 July 1980

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1 ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW

A GIVE PARAGRAPH NUMBER AND WORDING

B RECOMMENDED WORDING CHANGE

C REASON FOR RECOMMENDED CHANGE(S)

2 REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*	TELEPHONE NO
	DATE

DD FORM 1 OCT 76 1426 PREVIOUS EDITION WILL BE USED

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:12Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID
DEPARTMENT OF AIR FORCE
DOD-316

U.S.MAIL

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

AFALD/PTES-Stdn
WPAFB, OH 45433

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:12Z
Check the source to verify that this is the current version before use.