INCH-POUND
MIL-DTL-9395/5E
3 October 2006
SUPERSEDING
MIL-DTL-9395/5D
30 May 2001

DETAIL SPECIFICATION SHEET

SWITCHES, PRESSURE, (GAGE), TYPE II, SPST, 5 AMPERES

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the switches described herein shall consist of this document and MIL-DTL-9395.

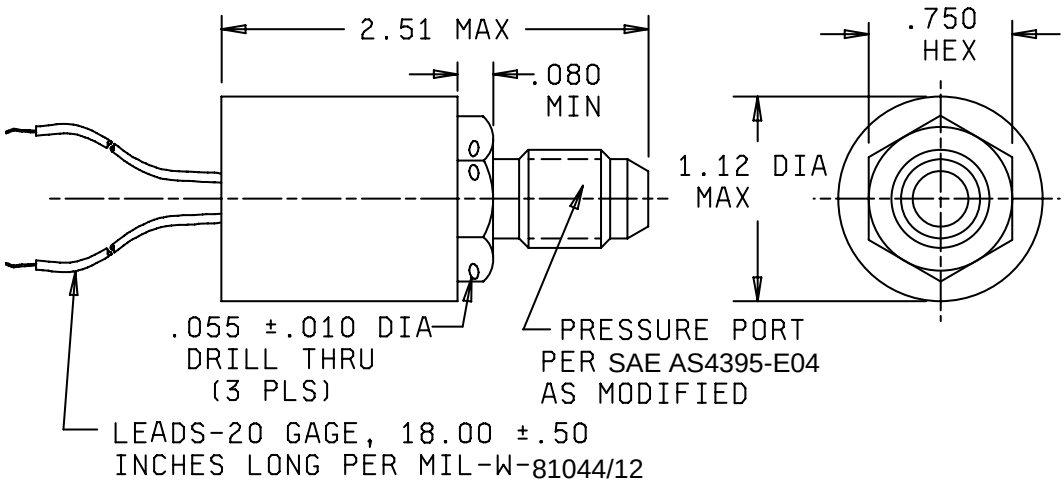

Inches	mm
.010	0.25
.055	1.40
.080	2.03
.500	12.70
.750	19.05
1.12	28.45
2.51	63.75
18.00	457.20



NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Unless otherwise specified, tolerances are ± .005 (0.13 mm) for three decimals and ±.02 (0.51 mm) for two place decimals.
4. Exact shape of switch optional provided dimensions specified are not exceeded.

FIGURE 1. Switches.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:12Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and electrical schematic: See figure 1.

Weight: 0.2 pound maximum.

Calibration: See tables I, II, III, and IV.

Proof pressure: 4,500 lb_f/in^2.

System pressure: 3,000 lb_f/in^2.

Burst pressure: 7,500 lb_f/in^2.

Electrical ratings:
Operating voltage: 28 Vdc.
Current rating: 5 amperes resistive.
2.5 amperes inductive.

Seal:
Electrical chamber: Hermetic.
Pressure chamber: Hermetic.
Reference chamber: Sealed or unsealed.

Pressure port: See figure 1.

Media: Hydraulic fluid IAW MIL-PRF-6083 or MIL-PRF-83282.

High temperature (operating and nonoperating): B (+275°F).

Low temperature (operating and nonoperating): D (-65°F).

Altitude: C (70,000 feet).

Shock: C (100 G).

Vibration: S (test condition D, method 204 of MIL-STD-202).

Life (mechanical): A (100,00 cycles).

Life (electrical): C (50,000 cycles).

Acceleration: C (8 G).

Pulsation amplitude: C (5 percent).

Pulsation frequency: D (500 ±50 Hz).

Pressure rise: F (500,00 lb_f/in^2).

Dielectric withstanding voltage (at reduced barometric pressure): Applicable.

Terminal strength (wire-lead terminals): Method 211 of MIL-STD-202, test condition A, except apply 25 pounds for 5 minutes in a direction straight away from the switch.

QUALIFICATION:

Single submission: Restricted to switch submitted.

Group submission: See table V.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:12Z
Check the source to verify that this is the current version before use.

PART NUMBER: Consists of the prefix "M9395/5-" followed by a five-character code. The code identifies the pressure setting mode (code from table I); high-pressure setting to within 100 lb_f/in^2 (code from table II) followed by high-pressure setting to within 25 lb_f/in^2 and applicable tolerance (code from table III); and low-pressure setting to within 100 lb_f/in^2 (code from table II) followed by low-pressure setting to within 25 lb_f/in^2 and applicable tolerance (code from table III). The five-character code used in the following example identifies a switch which actuates on increasing pressure at 300 ±25 lb_f/in^2, and deactuates on decreasing pressure at 150 ±lb_f/in^2.

EXAMPLE:

M9395/5- A CA AC

PREFIX.

PRESSURE SETTING MODE = Code "A" of table I.

HIHG-PRESSURE SETTING = Code "C" of table II (300 lb_f/in^2) and Code "A" of table III (0, ±25 lb_f/in^2).

LOW-PRESSURE SETTING - Code "A" of table II (100 lb_f/in^2) and Code "C" of table III (+50, ±25 lb_f/in^2).

TABLE I. Codes for pressure setting modes.

Code	Pressure Setting mode	
	High setting	Low setting
A ----------	At (or max) 1/	At (or min) 1/
B ----------	At (or max) 1/	Differential 2/
C ----------	Differential 2/	At (or min) 1/

1/ Setting values are designated by codes from table II and III.
2/ Setting values are designated by codes from table IV.

TABLE II. Codes for pressure settings to within 100 lb_f/in^2.

Code	Pressure (lb_f/in^2)	Code	Pressure (lb_f/in^2)	Code	Pressure (lb_f/in^2)
A----------	100	L ----------	1100	A----------	2100
B----------	200	M ----------	1200	B----------	2200
C ----------	300	N----------	1300	Y----------	2300
D ----------	400	P----------	1400	Z----------	2400
E----------	500	Q ----------	1500	1 ----------	2500
F----------	600	R----------	1600	2 ----------	2600
G ----------	700	S----------	1700	3 ----------	2700
H ----------	800	T----------	1800	4 ----------	2800
J ----------	900	U----------	1900	5 ----------	2900
K----------	1000	V----------	2000	6 ----------	3000

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:12Z
Check the source to verify that this is the current version before use.

TABLE III. Codes for pressure settings to within 25 lb_f/in^2 and tolerances.

	Unit				Tolerance (lb_f/in^2)
	0	+25	+50	+75	
Code ----------	A	B	C	D	±25
Code ----------	E	F	G	H	±50
Code ----------	J	K	L	M	±75
Code ----------	N	P	Q	R	±100
Code ----------	S	T	U	V	±150
Code ----------	W	X	Y	Z	±200
Code ----------	1	2	3	4	±300
Code ----------	5	6	7	8	±400
Code ----------	9	0	I	-	Min or Max

TABLE IV. Codes for differential pressure settings.

Code	Pressure (lb_f/in^2)	Code	Pressure (lb_f/in^2)
A ----------	0	M ----------	275
B ----------	25	N ----------	300
C ----------	50	P ----------	325
D ----------	75	Q ----------	350
E ----------	100	R ----------	375
F ----------	125	S ----------	400
G ----------	150	T----------	425
H ----------	175	U ----------	450
J----------	200	V ----------	475
K ----------	225	W----------	500
L----------	250		

TABLE V. Extent of qualification.

Part number	Number of samples required	Tests	Qualifies
M9395/5-AADAA ↓ -AADAA -A4ZXV -A4ZXV	1 each inductive 1 each resistive 1 each inductive 1 each resistive	Complete per qualification inspection inspection of MIL-DTL-9395	ALL configurations

SUPERSESSION DATA: Part number M9395/5-01 is superseded by part number M9395/5-AJEF-.

NOTES:

1. Design limitations (actuation values and tolerances, deadband and deactuations values and tolerances) should be coordinated with manufacturer(s) listed on the QPL for this specification sheet before specifying a particular "M" number. The fact that operating characteristics can be coded does not necessarily mean that is can be manufactured or acquired.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:12Z
Check the source to verify that this is the current version before use.

Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Referenced Documents:
MIL-PRF-6083
MIL-DTL-9395
MIL-W-81044/12
MIL-PRF-83282
MIL-STD-202

Custodians:
Army - CR
Navy - EC
Air Force - 11
DLA - CC

Review activities:
Navy - MC, SH
Air Force – 99

Preparing activity:
DLA - CC

(Project 5930-2006-044)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil/ .

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:12Z
Check the source to verify that this is the current version before use.