INCH POUND
MIL-DTL-9395/6B
30 May 2001
SUPERSEDING
MIL-S-9395/6A
14 March 1974

DETAIL SPECIFICATION SHEET

SWITCHES, PRESSURE (ABSOLUTE), TYPE I, SPDT, 3 AMPERES

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the pressure switch described herein shall consist of this document and the latest issue of Specification MIL-DTL-9395.

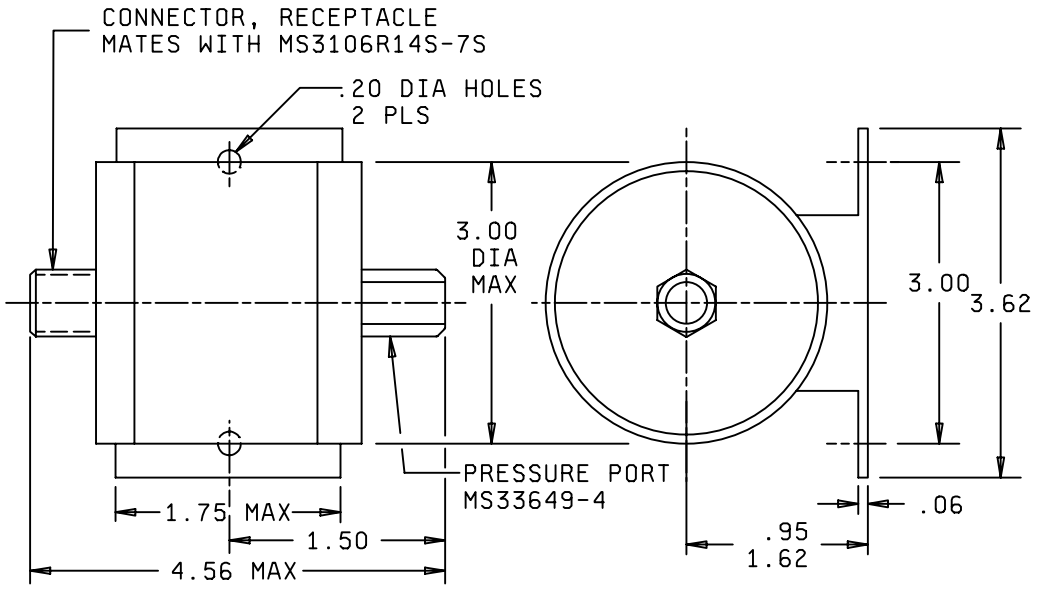

INCHES	MM
.06	1.52
.20	5.08
.95	24.13
1.50	38.10
1.62	41.15
1.75	44.45
3.00	76.20
3.62	91.95
4.56	115.82

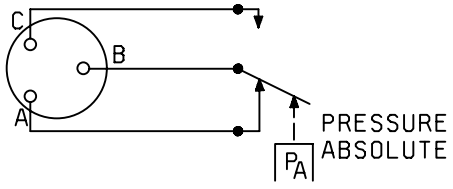

WIRING SCHEMATIC

NOTES:
1. Dimensions are in inches. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. Unless otherwise specified, tolerance is ± .02 (.51 mm).
4. Exact shape of switch optional provided dimensions specified are not exceeded.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:12Z
Check the source to verify that this is the current version before use.

TABLE I. Dash number and pressure settings.

Dash number	Pressure switch settings	
	Increasing	Decreasing
	psia	psia
01	72^{+0}_{-1}	70 ±1
02	52^{+0}_{-1}	50 ±1

REQUIREMENTS:

Dimensions, configuration, and electrical schematic: See figure.

Weight: Not to exceed .7 pound.

Calibration: See table I.

Proof pressure: 150 psia.

System pressure: 100 psia.

Burst pressure: 260 psia.

Electrical ratings:
Operating voltage - 28 Vdc.
Current rating -3 amperes resistive.
1 ampere inductive.

Seal:
Electrical chamber: Hermetic.
Pressure chamber: Hermetic.
Reference chamber: Hermetic.

Electrical connector: See figure.

Pressure port: See figure.

Media: Dry air; nitrogen; fuel per MIL-DTL-5624; lubricating oil per MIL-PRF-7808; or hydraulic fluid per MIL-H-5606.

High temperature (operating and nonoperating): B (+275°F).

Low temperature (operating and nonoperating): D (-65°F).

Altitude: C (70,000 ft).

Shock: C (100 G).

Vibration: S (test condition C, method 204 of MIL-STD-202, except 10 - 2,000 Hz, 10G).

Life (mechanical): A (100,000 cycles).

Life (electrical): C (50,000 cycles).

Acceleration: C (8 G).

Pulsation amplitude: A (0%).

Pulsation frequency: A (0 Hz).

Pressure surge: A (less than 100 psi/sec).

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:12Z
Check the source to verify that this is the current version before use.

Dielectric withstanding voltage (at reduced barometric pressure): Applicable.

Connector torque: Applicable.

Part number: M9395/6-(dash number from table I).

Custodians:
Army - CR
Navy - EC
Air Force - 11
DLA-CC

Review activities:
Navy - MC, SH
Air Force - 99

Preparing activity:
DLA-CC

(Project 5930-1730-04)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:12Z
Check the source to verify that this is the current version before use.