INCH-POUND
MIL-DTL-9395/6C
3 October 2006
SUPERSEDING
MIL-DTL-9395/6B
30 May 2001

DETAIL SPECIFICATION SHEET

SWITCHES, PRESSURE (ABSOLUTE), TYPE I, SPDT, 3 AMPERES

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the switches described herein shall consist of this document and MIL-DTL-9395.

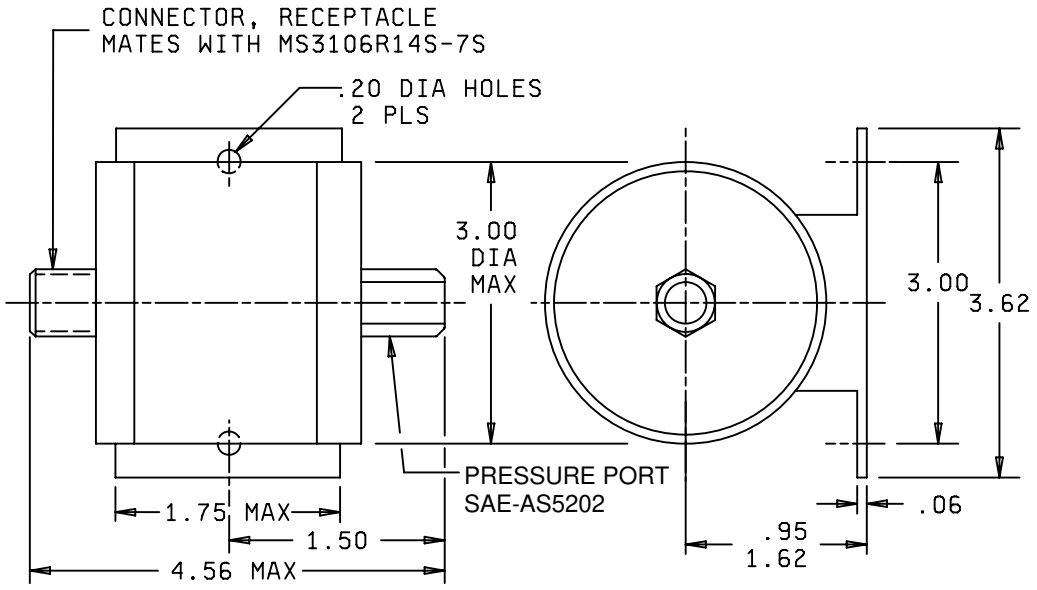

Inches	mm
.06	1.52
.20	5.08
.95	24.13
1.50	38.10
1.62	41.15
1.75	44.45
3.00	76.20
3.62	91.95
4.56	115.82

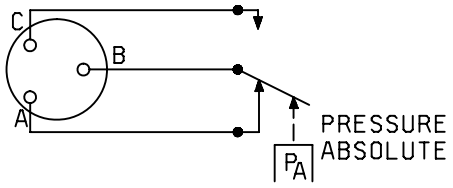

WIRING SCHEMATIC

NOTES:
1. Dimensions are in inches. Metric equivalents (to the nearest 0.01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
2. Unless otherwise specified, tolerance is ± .02 (0.51 mm).
3. Exact shape of switch optional provided dimensions specified are not exceeded.

FIGURE1. Swithces.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:12Z
Check the source to verify that this is the current version before use.

TABLE I. Dash number and pressure settings.

Dash number	Pressure switch settings	
	Increasing	Decreasing
	psia	psia
01	72^{+0}_{-1}	70 ±1
02	52^{+0}_{-1}	50 ±1

REQUIREMENTS:

Dimensions, configuration, and electrical schematic: See figure.

Weight: Not to exceed 0.7 pound.

Calibration: See table I.

Proof pressure: 150 psia.

System pressure: 100 psia.

Burst pressure: 260 psia.

Electrical ratings:
Operating voltage: 28 V dc.
Current rating: 3 amperes resistive.
1 ampere inductive.

Seal:
Electrical chamber: Hermetic.
Pressure chamber: Hermetic.
Reference chamber: Hermetic.

Electrical connector: See figure.

Pressure port: See figure.

Media: Dry air; nitrogen; fuel IAW MIL-DTL-5624; lubricating oil IAW MIL-PRF-7808; or hydraulic fluid IAW MIL-PRF-6083.

High temperature (operating and nonoperating): B (+275°F).

Low temperature (operating and nonoperating): D (-65°F).

Altitude: C (70,000 ft).

Shock: C (100 G).

Vibration: S (test condition C, method 204 of MIL-STD-202, except 10 - 2,000 Hz, 10G).

Life (mechanical): A (100,000 cycles).

Life (electrical): C (50,000 cycles).

Acceleration: C (8 G).

Pulsation amplitude: A (0%).

Pulsation frequency: A (0 Hz).

Pressure surge: A (less than 100 psi/sec).

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:12Z
Check the source to verify that this is the current version before use.

Dielectric withstanding voltage (at reduced barometric pressure): Applicable.

Connector torque: Applicable.

Part number: M9395/6-(dash number from table I).

Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Referenced Documents:
MIL-PRF-6083
MIL-DTL-5624
MIL-PRF-7808
MIL-DTL-9395
MIL-STD-202
SAE-AS5202

Custodians:
Army - CR
Navy - EC
Air Force - 11
DLA - CC

Review activities:
Navy - MC, SH
Air Force - 99

Preparing activity:
DLA - CC

(Project 5930-2006-045)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil/ .

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:12Z
Check the source to verify that this is the current version before use.