
INCH-POUND
MIL-DTL-9395/6D
24 September 2018
SUPERSEDING
MIL-DTL-9395/6C
3 October 2006

DETAIL SPECIFICATION SHEET


SWITCHES, PRESSURE (ABSOLUTE), TYPE I, SPDT, 3 AMPERES

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the switches described herein shall consist of this document and MIL-DTL-9395.

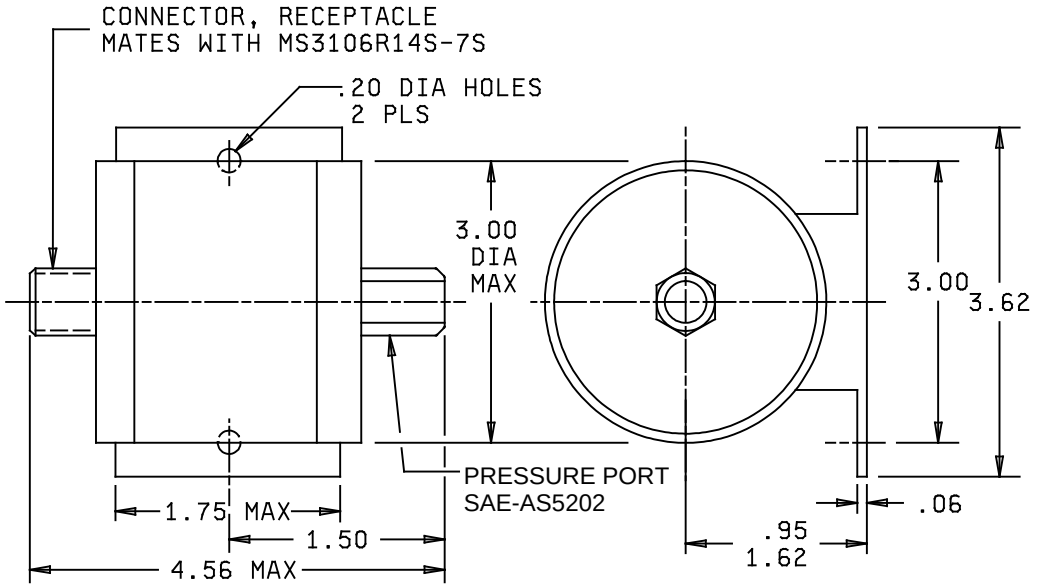

Inches	mm
.06	1.52
.20	5.08
.95	24.13
1.50	38.10
1.62	41.15
1.75	44.45
3.00	76.20
3.62	91.95
4.56	115.82

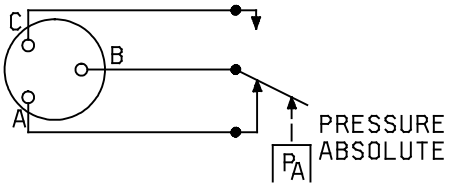

WIRING SCHEMATIC

NOTES:
1. Dimensions are in inches. Metric equivalents (to the nearest 0.01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
2. Unless otherwise specified, tolerance is ± .02 (0.51 mm).
3. Exact shape of switch optional provided dimensions specified are not exceeded.
4. MS3106R14S-7S details are found in SAE-AS31061

FIGURE1. Switches.

AMSC N/A

FSC 5930

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:12Z
Check the source to verify that this is the current version before use.

TABLE I. Dash number and pressure settings.

Dash number	Pressure switch settings	
	Increasing	Decreasing
	psia	psia
01	72 $^{+0}_{-1}$	70 ±1
02	52 $^{+0}_{-1}$	50 ±1

REQUIREMENTS:

Dimensions, configuration, and electrical schematic: See figure.

Weight: Not to exceed 0.7 pound.

Calibration: See table I.

Proof pressure: 150 psia.

System pressure: 100 psia.

Burst pressure: 260 psia.

Electrical ratings:
Operating voltage: 28 V dc.
Current rating: 3 amperes resistive.
1 ampere inductive.

Seal:
Electrical chamber: Hermetic.
Pressure chamber: Hermetic.
Reference chamber: Hermetic.

Electrical connector: See figure.

Pressure port: See figure.

Media: Dry air; nitrogen; fuel IAW MIL-DTL-5624; lubricating oil IAW MIL-PRF-7808; or hydraulic fluid IAW MIL-PRF-6083.

High temperature (operating and nonoperating): B (+275°F).

Low temperature (operating and nonoperating): D (-65°F).

Altitude: C (70,000 ft).

Shock: C (100 G).

Vibration: S (test condition C, of MIL-STD-202-204, except 10 - 2,000 Hz, 10G).

Life (mechanical): A (100,000 cycles).

Life (electrical): C (50,000 cycles).

Acceleration: C (8 G).

Pulsation amplitude: A (0%).

Pulsation frequency: A (0 Hz).

Pressure surge: A (less than 100 psi/sec).

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:12Z
Check the source to verify that this is the current version before use.

Dielectric withstanding voltage (at reduced barometric pressure): Applicable.

Connector torque: Applicable.

Part number: M9395/6-(dash number from table I).

The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the previous issue.

Referenced Documents:
MIL-PRF-6083
MIL-DTL-5624
MIL-PRF-7808
MIL-DTL-9395
MIL-STD-202-204
SAE-AS31061
SAE-AS5202

Custodians:
Army - CR
Navy - EC
Air Force - 85
DLA - CC

Preparing activity:
DLA - CC

(Project 5930-2018-036)

Review activities:
Navy - MC, SH

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil/ .

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:12Z
Check the source to verify that this is the current version before use.