
MILITARY SPECIFICATION SHEET


SWITCHES, PRESSURE, (GAGE), TYPE II,
SPDT, 10 AMPERES

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the pressure switches described herein shall consist of this document and the latest issue of Specification MIL-S-9395.

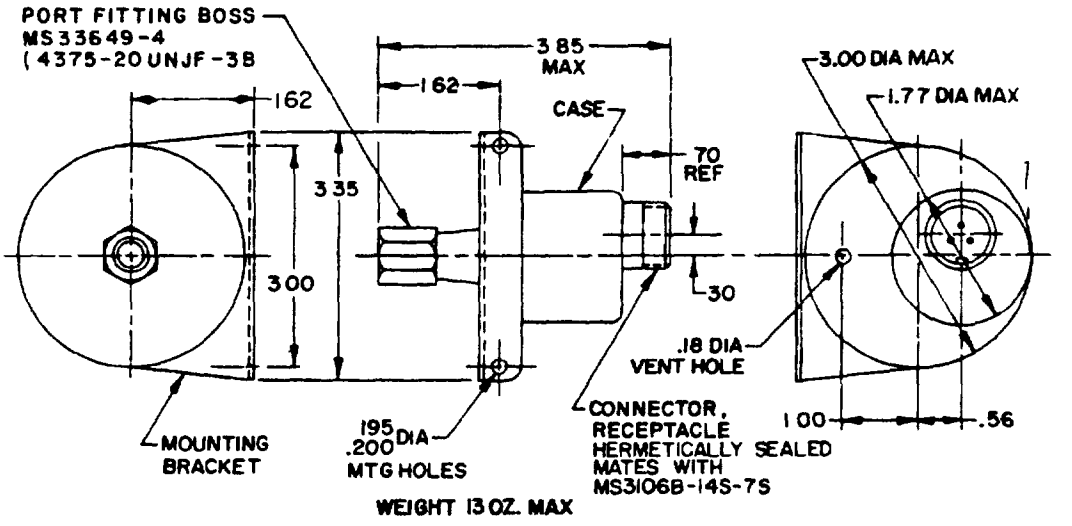

INCHES	MM	INCHES	MM
.18	4.6	1.00	25.4
.195	4.95	1.62	41.1
.200	5.08	1.77	45.0
.30	7.6	3.00	76.2
.4375	11.112	3.35	85.1
.56	14.2	3.85	97.8
.70	17.8		

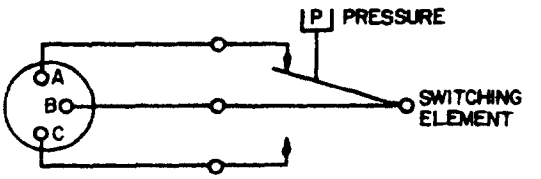

SCHEMATIC

NOTES
1. Dimensions are in inches
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Unless otherwise specified, tolerance is ±.02 (.5 mm)
4. Exact shape of switch optional provided dimensions specified are not exceeded

FIGURE 1 Switches

Source: https://assist.dla.mil -- Downloaded: 202640-17T12:13Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

Dimensions, weight, and electrical schematic See figure 1.

Calibration See tables I, II, III, and IV.

Proof pressure 120 lb_f/in^2.

System pressure 60 lb_f/in^2.

Burst pressure 180 lb_f/in^2

Electrical ratings
Operating voltage - 28 Vdc.
Current rating - 10 amperes resistive.

Seal.
Electrical chamber Hermetic.
Pressure chamber Watertight.
Reference chamber Unsealed

Electrical connector See figure 1.

Pressure port See figure 1.

Media Dry air, nitrogen, fuel per MIL-T-5624, lubricating oil per MIL-L-7808, or hydraulic fluid per MIL-H-5606.

High temperature (operating and nonoperating) B (except +250°F).

Low temperature (operating and nonoperating) D (-65°F).

Altitude C (except 80,000 feet).

Shock C (100 G).

Vibration S (test condition C, method 204 of MIL-STD-202 except 10 - 2,000 Hz, 10 G).

Life (mechanical) F (50,000 cycles).

Life (electrical) C (50,000 cycles).

Acceleration C (8 G).

Pulsation amplitude A (0 percent)

Pulsation frequency A (0 Hz).

Pressure rise A (less than 100 $lb_f/in^2/sec$).

Dielectric withstanding voltage (at reduced barometric pressure) Applicable.

Connector torque Applicable.

QUALIFICATION

Single submission Restricted to switch submitted.
Group submission See table V.

PART NUMBER The part number shall consist of the prefix "M9395/08-" followed in sequence by appropriate characters from tables I, II, III, IV, II, III, and IV to describe high and low pressure settings and tolerances. Part number M9395/08-AWAQHNK identifies a pressure switch with pressure setting modes of "AT" at both high and low settings (a high pressure setting of 40 ± 2 lb_f/in^2 and a low pressure setting of 15 ± 1 lb_f/in^2).

Source: https://assist.dla.mil -- Downloaded: 202610-17T12:13Z
Check the source to verify that this is the current version before use.

EXAMPLE

M9395/08- A WAQ HNK

PREFIX.

PRESSURE SETTING MODE from table I.

HIGH-PRESSURE SETTING = Coarse pressure, fine pressure, and tolerance from tables II, III, and IV.

LOW-PRESSURE SETTING = Coarse pressure, fine pressure, and tolerance from tables II, III, and IV.

TABLE I. Code for switch setting mode.

Code	Higher pressure setting mode	Lower pressure setting mode
A - - -	AT	AT
B - - -	AT	Differential with respect to higher pressure setting
C - - -	Differential with respect to lower pressure setting	AT

TABLE II. Code character for coarse pressure setting.

Code character for pressure setting (coarse) within 2 lb_f/in^2	Pressure setting (lb_f/in^2)
A - - - - - - - - - - -	0
B - - - - - - - - - - -	2
C - - - - - - - - - - -	4
D - - - - - - - - - - -	6
E - - - - - - - - - - -	8
F - - - - - - - - - - -	10
G - - - - - - - - - - -	12
H - - - - - - - - - - -	14
J - - - - - - - - - - -	16
K - - - - - - - - - - -	18
L - - - - - - - - - - -	20
M - - - - - - - - - - -	22
N - - - - - - - - - - -	24
P - - - - - - - - - - -	26
Q - - - - - - - - - - -	28
R - - - - - - - - - - -	30
S - - - - - - - - - - -	32
T - - - - - - - - - - -	34
U - - - - - - - - - - -	36
V - - - - - - - - - - -	38
W - - - - - - - - - - -	40
X - - - - - - - - - - -	42
Y - - - - - - - - - - -	44
Z - - - - - - - - - - -	46
3 - - - - - - - - - - -	48
4 - - - - - - - - - - -	50
5 - - - - - - - - - - -	52
6 - - - - - - - - - - -	54
7 - - - - - - - - - - -	56
8 - - - - - - - - - - -	58
9 - - - - - - - - - - -	60

Source: https://assist.dla.mil -- Downloaded: 202610-17T12:13Z
Check the source to verify that this is the current version before use.

TABLE III. Character denoting increment to be added to coarse pressure setting.

Code	Increment (lb_f/in^2) to be added to coarse pressure setting
A - - - -	0
B - - - -	0.1
C - - - -	0.2
D - - - -	0.25
E - - - -	0.3
F - - - -	0.4
G - - - -	0.5
H - - - -	0 6
J - - - -	0.7
K - - - -	0.75
L - - - -	0.8
M - - - -	0.9
N - - - -	1.0
P - - - -	1.1
Q - - - -	1.2
R - - - -	1.25
S - - - -	1.3
T - - - -	1.4
U - - - -	1.5
V - - - -	1.6
W - - - -	1.7
X - - - -	1.75
Y - - - -	1.8
Z - - - -	1.9

TABLE IV. Character denoting tolerance on pressure setting.

Code	Tolerance ± (lb_f/in^2)	Code	Tolerance ± (lb_f/in^2)
A- - -	Max	S- - -	2.50
B- - -	Min	T- - -	2.75
C- - -	.1	U- - -	3.0
D- - -	.2	V- - -	3.25
E- - -	3	W- - -	3.50
F- - -	.4	X- - -	4
G- - -	.5	Y- - -	4.5
H- - -	.6	Z- - -	5
J- - -	.8	1- - -	5.5
K- - -	1.0	2- - -	6
L- - -	1.2	3- - -	6.5
M- - -	1.4	4- - -	7
N- - -	1.6	5- - -	7.5
P- - -	1.8	6- - -	8
Q- - -	2.0	7- - -	9
R- - -	2.25	8- - -	10

SUPERSESSION DATA Part number M9395/08-01 is superseded by part number M9395/08-ABRABKB.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:13Z
Check the source to verify that this is the current version before use.

TABLE V. Extent of qualification.

Part number	Number of samples required	Tests	Qualifies
MIL-S-9395/08-ACBAAAB	2	Complete per qualification inspection of MIL-S-9395	All pressure setting modes
MIL-S-9395/08-ANAGQAC	2		
MIL-S-9395/08-A7UG8QG	2		

NOTES
1. Design limitations (actuation values and tolerances, deadband and deactuation values and tolerances) should be coordinated with manufacturer(s) listed on the QPL for this specification sheet before specifying a particular "M" number. The fact that operating characteristics can be coded does not necessarily mean that it can be manufactured or procured
2. Revision letters are not used in this revision to identify changes with respect to the previous issue, due to the extensiveness of the changes.

Custodians
Army - ER
Navy - EC
Air Force - 85

Review activities
Army - AV
Navy - AS
Air Force - 11, 17, 99
DLA - ES

User activity
Navy - MC

Preparing activity
Air Force - 85

(Project 5930-1113-1)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:13Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.

NOTE This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE
MIL-S-9395/8C, 23 July 1980

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1 ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A GIVE PARAGRAPH NUMBER AND WORDING

B RECOMMENDED WORDING CHANGE

C REASON FOR RECOMMENDED CHANGE(S)

2 REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*	TELEPHONE NO
	DATE

DD FORM 1 OCT 76 1426 PREVIOUS EDITION WILL BE USED

Source: https://assist.dla.mil -- Downloaded: 202640-17T12:13Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID
DEPARTMENT OF AIR FORCE
DOD-318

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

AFALD/PTES-Stdn
WPAFB, OH 45433

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:13Z
Check the source to verify that this is the current version before use.