
INCH-POUND
MIL-DTL-9395/8F
24 September 2018
SUPERSEDING
MIL-DTL-9395/8E
3 October 2006

DETAIL SPECIFICATION SHEET


SWITCHES, PRESSURE, (GAGE), TYPE II, SPDT, 10 AMPERES

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the switches described herein shall consist of this document and MIL-DTL-9395.

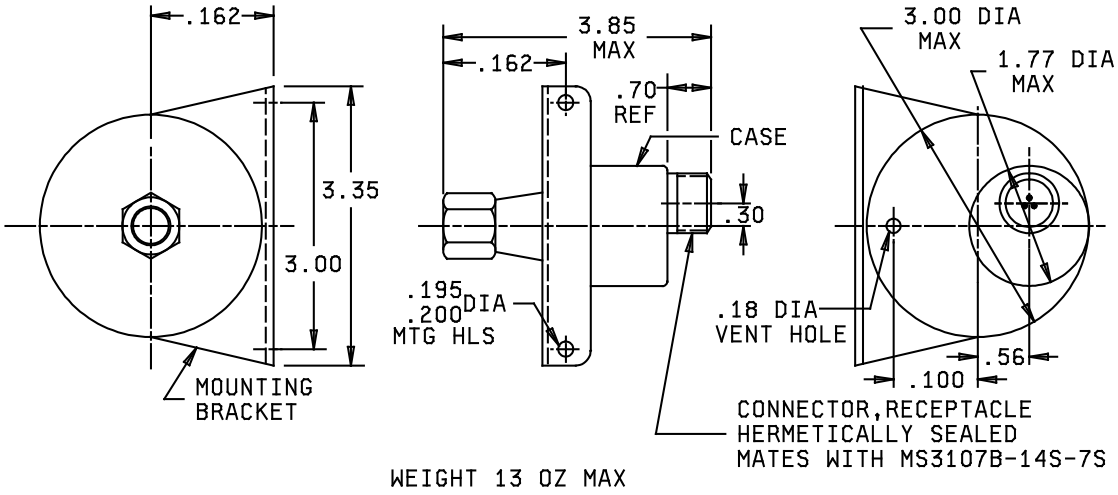

Inches	mm	Inches	mm
.18	4.6	1.00	25.4
.195	4.95	1.62	41.1
.200	5.08	1.77	45.0
.30	7.6	3.00	76.2
.4375	11.113	3.35	85.1
.56	14.2	3.85	97.8
.70	17.8		



NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Unless otherwise specified, tolerance is ± .02 (.51 mm).
4. Exact shape of switch optional provided dimensions specified are not exceeded.
5. MS3107B-14S-7S details are found in SAE-AS31071

FIGURE 1. Switches.

AMSC N/A

FSC 5930

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:13Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions, weight, and electrical schematic: See figure 1.

Calibration: See tables I, II, III, and IV.

Proof pressure: 120 lb_f/in^2.

System pressure: 60 lb_f/in^2.

Burst pressure: 180 lb_f/in^2.

Electrical ratings:
Operating voltage: 28 Vdc.
Current rating: 10 amperes resistive.

Seal:
Electrical chamber: Hermetic.
Pressure chamber: Watertight.
Reference chamber: Unsealed.

Electrical connector: See figure 1.

Pressure port: See figure 1.

Media: Dry air; nitrogen; fuel IAW MIL-DTL-5624; including oil IAW MIL-PRF-7808; or hydraulic fluid IAW MIL-PRF-6083.

High temperature (operating and nonoperating): B (except +250°F).

Low temperature (operating and nonoperating): D (-65°F).

Altitude: C (except 80,000 feet).

Shock: C (100 G).

Vibration: S (test condition C, of MIL-STD-202-204 except 10 - 2,000 Hz, 10 G).

Life (mechanical): F (50,000 cycles).

Life (electrical): C (50,000 cycles).

Acceleration: C (8 G).

Pulsation amplitude: A (0 percent).

Pulsation frequency: A (0 Hz).

Pressure rise: A (less than 100 lb_f/in^2/sec).

Dielectric withstanding voltage (at reduced barometric pressure): Applicable.

Connector torque: Applicable.

QUALIFICATION:

Single submission: Restricted to switch submitted.
Group submission: See table V.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:13Z
Check the source to verify that this is the current version before use.

PART NUMBER: The part number shall consist of the prefix "M9395/08-" followed in sequence by appropriate characters from tables I, II, III, and IV to describe high and low pressure settings and tolerances. Part number M9395/08-AWAQHNK identifies a pressure switch with pressure setting modes on "AT" at both high and low settings (a high pressure setting of 40 ±2 lb_f/in^2 and a low pressure setting of 15 ±1 lb_f/in^2).

EXAMPLE:

M9395/08- A WAQ HNK

PREFIX.

PRESSURE SETTING MODE from table I.

HIGH-PRESSURE SETTING = Coarse pressure, fine pressure, and tolerance from tables II, III, and IV.

LOW-PRESSURE SETTING - Coarse pressure fine pressure, and tolerance from tables II, III, and IV.

TABLE I. Code for switch setting mode.

Code	High pressure setting mode	Low pressure setting mode
A	AT	AT
B	AT	Differential with respect to higher pressure setting
C	Differential with respect to lower pressure setting	AT

TABLE II. Code character for coarse pressure setting.

Code character for pressure setting (coarse) within 2 lb_f/in^2	Pressure setting (lb_f/in^2)	Code character for pressure setting (coarse) within 2 lb_f/in^2	Pressure setting (lb_f/in^2)
A	0	S	32
B	2	T	34
C	4	U	36
D	6	V	38
E	8	W	40
F	10	X	42
G	12	Y	44
H	14	Z	46
J	16	3	48
K	18	4	50
L	20	5	52
M	22	6	54
N	24	7	56
P	26	8	58
Q	28	9	60
R	30		

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:13Z
Check the source to verify that this is the current version before use.

TABLE III. Character denoting increment to be added to coarse pressure setting.

Code	Increment (lb_f/in^2) to be added to coarse pressure setting	Code	Increment (lb_f/in^2) to be added to coarse pressure setting
A	0	N	1.0
B	0.1	P	1.1
C	0.2	Q	1.2
D	0.25	R	1.25
E	0.3	S	1.3
F	0.4	T	1.4
G	0.5	U	1.5
H	0.6	V	1.6
J	0.7	W	1.7
K	0.75	X	1.75
L	0.8	Y	1.8
M	0.9	Z	1.9

TABLE IV. Character denoting tolerance on pressure setting.

Code	Tolerance ± (lb_f/in^2)	Code	Tolerance ± (lb_f/in^2)
A	Max	S	2.50
B	Min	T	2.75
C	.1	U	3.0
D	.2	V	3.25
E	.3	W	3.50
F	.4	X	4.0
G	.5	Y	4.5
H	.6	Z	5.0
J	.8	1	5.5
K	1.0	2	6.0
L	1.2	3	6.5
M	1.4	4	7.0
N	1.6	5	7.5
P	1.8	6	8.0
Q	2.0	7	9.0
R	2.25	8	10.0

SUPPRESSION DATA: Part number M9395/08-01 is superseded by part number M9395/08-ABRABKB.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:13Z
Check the source to verify that this is the current version before use.

TABLE V. Extent of qualification.

Part number	Number of samples required	Tests	Qualifies
M9395/08-ACBAAAB M9395/08-ANAGQAC M9395/08-A7UG8QC	2 2 2	Complete IAW qualification inspection of MIL-DTL-9395	All pressure setting modes

NOTES:
1. Design limitations (actuation values and tolerances, deadband and deactuation values and tolerances) should be coordinated with manufacturer(s) listed on the QPL for this specification sheet before specifying a particular "M" number. The fact that operating characteristics can be coded does not necessarily mean that it can be manufactured or procured.

The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the previous issue.

Referenced Documents:
MIL-DTL-5624
MIL-PRF-6083
MIL-PRF-7808
MIL-DTL-9395
MIL-STD-202-204
SAE-AS31071

Custodians:
Army - CR
Navy - EC
Air Force - 85
DLA - CC

Preparing activity:
DLA - CC

(Project 5930-2018-037)

Review activities:
Navy - MC, SH

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil/ .

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:13Z
Check the source to verify that this is the current version before use.