
INCH-POUND
MIL-DTL-9395/8G
12 August 2024
SUPERSEDING
MIL-DTL-9395/8F
24 September 2018

DETAIL SPECIFICATION SHEET

# SWITCHES, PRESSURE, (GAGE), TYPE II, SPDT, 10 AMPERES

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the switches described herein shall consist of this document and MIL-DTL-9395.

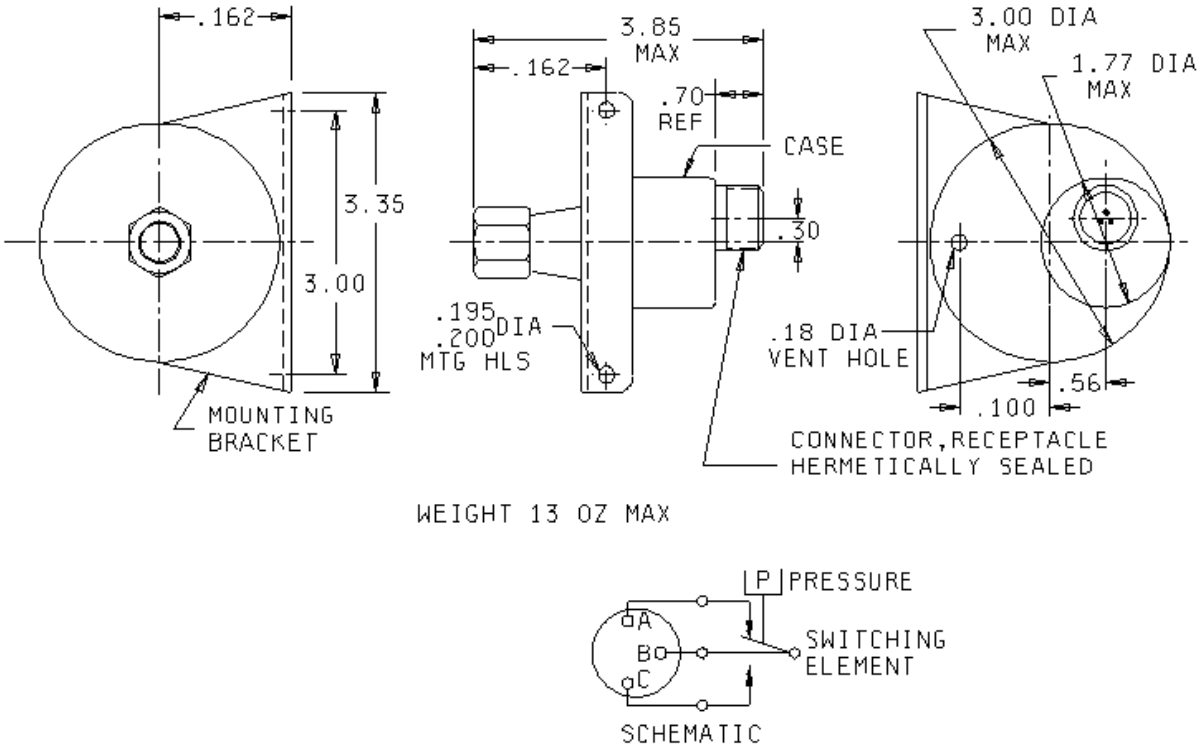


NOTES:
1. Dimensions are in inches.
2. Unless otherwise specified, tolerance is ± .02.
3. Exact shape of switch optional provided dimensions specified are not exceeded.

FIGURE 1. Switches.

AMSC N/A
FSC 5930
DISTRIBUTION STATEMENT A. Approved for public release. Distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:13Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions, weight, and electrical schematic: See figure 1.

Calibration: See tables I, II, III, and IV.

Proof pressure: 120 $lb_f/in^2$.

System pressure: 60 $lb_f/in^2$.

Burst pressure: 180 $lb_f/in^2$.

Electrical ratings:
Operating voltage: 28 Vdc.
Current rating: 10 amperes resistive.

Seal:
Electrical chamber: Hermetic.
Pressure chamber: Watertight.
Reference chamber: Unsealed.

Electrical connector: See figure 1.

Pressure port: See figure 1.

Media: Dry air; nitrogen; fuel IAW MIL-DTL-5624; including oil IAW MIL-PRF-7808; or hydraulic fluid IAW MIL-PRF-6083.

High temperature (operating and nonoperating): B (except +250°F).

Low temperature (operating and nonoperating): D (-65°F).

Altitude: C (except 80,000 feet).

Shock: C (100 G).

Vibration: S (test condition C, of MIL-STD-202-204 except 10 - 2,000 Hz, 10 G).

Life (mechanical): F (50,000 cycles).

Life (electrical): C (50,000 cycles).

Acceleration: C (8 G).

Pulsation amplitude: A (0 percent).

Pulsation frequency: A (0 Hz).

Pressure rise: A (less than 100 $lb_f/in^2$/sec).

Dielectric withstanding voltage (at reduced barometric pressure): Applicable.

Connector torque: Applicable.

QUALIFICATION:

Single submission: Restricted to switch submitted.
Group submission: See table V.



Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:13Z
Check the source to verify that this is the current version before use.

PART NUMBER: The part number shall consist of the prefix "M9395/08-" followed in sequence by appropriate characters from tables I, II, III, and IV to describe high and low pressure settings and tolerances. Part number M9395/08-AWAQHNK identifies a pressure switch with pressure setting modes on "AT" at both high and low settings (a high pressure setting of 40 ±2 $lb_f/in^2$ and a low pressure setting of 15 ±1 $lb_f/in^2$).

EXAMPLE:

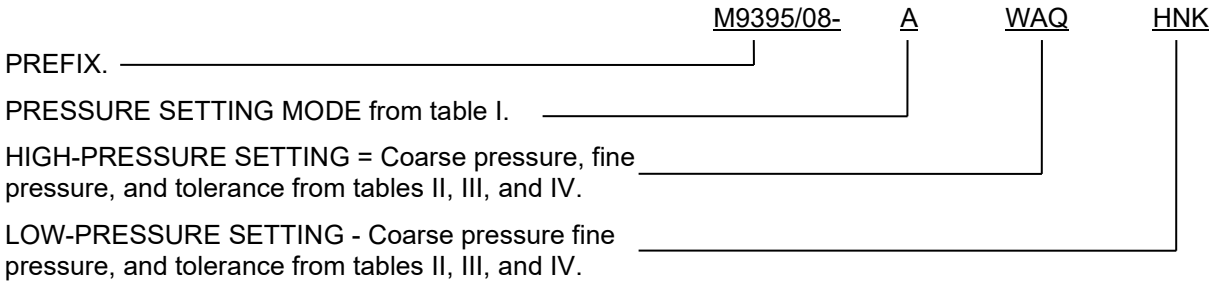



TABLE I. Code for switch setting mode.

| Code | High pressure setting mode | Low pressure setting mode |
|---|---|---|
| A | AT | AT |
| B | AT | Differential with respect to higher pressure setting |
| C | Differential with respect to lower pressure setting | AT |

TABLE II. Code character for coarse pressure setting.

| Code character for pressure setting (coarse) within 2 $lb_f/in^2$ | Pressure setting ($lb_f/in^2$) | Code character for pressure setting (coarse) within 2 $lb_f/in^2$ | Pressure setting ($lb_f/in^2$) |
|---|---|---|---|
| A | 0 | S | 32 |
| B | 2 | T | 34 |
| C | 4 | U | 36 |
| D | 6 | V | 38 |
| E | 8 | W | 40 |
| F | 10 | X | 42 |
| G | 12 | Y | 44 |
| H | 14 | Z | 46 |
| J | 16 | 3 | 48 |
| K | 18 | 4 | 50 |
| L | 20 | 5 | 52 |
| M | 22 | 6 | 54 |
| N | 24 | 7 | 56 |
| P | 26 | 8 | 58 |
| Q | 28 | 9 | 60 |
| R | 30 | | |



Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:13Z
Check the source to verify that this is the current version before use.

TABLE III. Character denoting increment to be added to coarse pressure setting.

| Code | Increment ($lb_f/in^2$) to be added to coarse pressure setting | Code | Increment ($lb_f/in^2$) to be added to coarse pressure setting |
|---|---|---|---|
| A | 0 | N | 1.0 |
| B | 0.1 | P | 1.1 |
| C | 0.2 | Q | 1.2 |
| D | 0.25 | R | 1.25 |
| E | 0.3 | S | 1.3 |
| F | 0.4 | T | 1.4 |
| G | 0.5 | U | 1.5 |
| H | 0.6 | V | 1.6 |
| J | 0.7 | W | 1.7 |
| K | 0.75 | X | 1.75 |
| L | 0.8 | Y | 1.8 |
| M | 0.9 | Z | 1.9 |

TABLE IV. Character denoting tolerance on pressure setting.

| Code | Tolerance ± ($lb_f/in^2$) | Code | Tolerance ± ($lb_f/in^2$) |
|---|---|---|---|
| A | Max | S | 2.50 |
| B | Min | T | 2.75 |
| C | .1 | U | 3.0 |
| D | .2 | V | 3.25 |
| E | .3 | W | 3.50 |
| F | .4 | X | 4.0 |
| G | .5 | Y | 4.5 |
| H | .6 | Z | 5.0 |
| J | .8 | 1 | 5.5 |
| K | 1.0 | 2 | 6.0 |
| L | 1.2 | 3 | 6.5 |
| M | 1.4 | 4 | 7.0 |
| N | 1.6 | 5 | 7.5 |
| P | 1.8 | 6 | 8.0 |
| Q | 2.0 | 7 | 9.0 |
| R | 2.25 | 8 | 10.0 |

SUPPRESSION DATA: Part number M9395/08-01 is superseded by part number M9395/08-ABRABKB.



Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:13Z
Check the source to verify that this is the current version before use.

TABLE V. Extent of qualification.

| Part number | Number of samples required | Tests | Qualifies |
|---|---|---|---|
| M9395/08-ACBAAAB<br>M9395/08-ANAGQAC<br>M9395/08-A7UG8QC | 2<br>2<br>2 | Complete IAW qualification inspection of MIL-DTL-9395 | All pressure setting modes |

NOTES:
1. Design limitations (actuation values and tolerances, deadband and deactuation values and tolerances) should be coordinated with manufacturer(s) listed on the QPL for this specification sheet before specifying a particular "M" number. The fact that operating characteristics can be coded does not necessarily mean that it can be manufactured or procured.

The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the previous issue.

Referenced Documents:
MIL-DTL-5624
MIL-PRF-6083
MIL-PRF-7808
MIL-DTL-9395
MIL-STD-202-204

Custodians:
Army - CR
Navy - EC
Air Force - 85
DLA - CC

Preparing activity:
DLA - CC

(Project 5930-2027-047)

Review activities:
Navy - MC, SH

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil/ .



Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:13Z
Check the source to verify that this is the current version before use.