MIL-S-9395/3B
24 JAN 1974
SUPERSEDING
MIL-S-9395/3A
26 NOVEMBER 1969

MILITARY SPECIFICATION SHEET

SWITCH, PRESSURE

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the switch described herein shall consist of this document and the latest issue of Specification MIL-D-9395.

INACTIVE FOR NEW DESIGN AFTER 1/

1/ If a qualified products list is not established or other justification for retaining this sheet is not obtained, this sheet is canceled as of 1 October 1974.

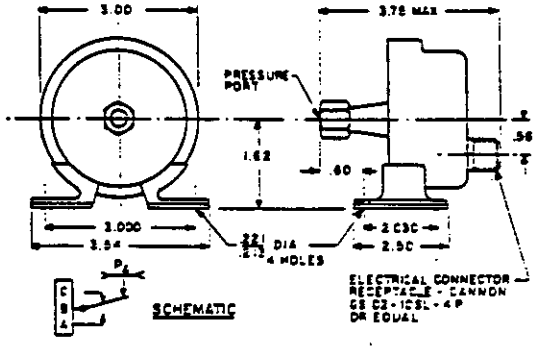


FIGURE 1

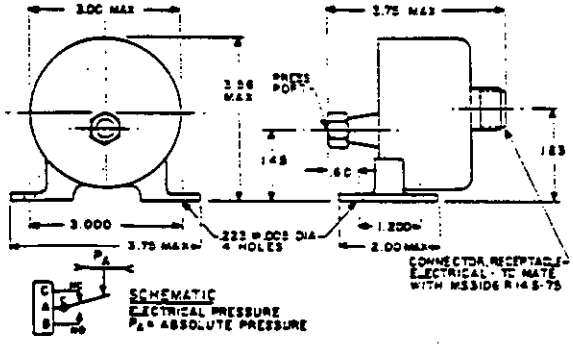


FIGURE 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:12Z
Check the source to verify that this is the current version before use.

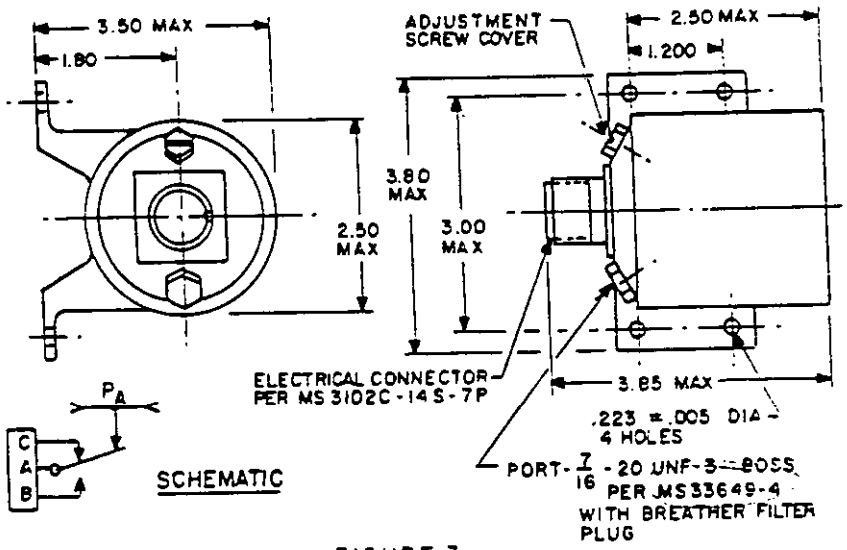


FIGURE 3

INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM
.005	.13	.60	15.24	2.00	50.80	3.54	89.92
.020	.51	1.200	30.48	2.030	51.56	3.56	90.42
.213	5.41	1.45	36.83	2.50	63.50	3.75	95.25
.221	5.61	1.62	41.15	3.00	76.20	3.80	96.52
.223	5.66	1.80	45.72	3.50	88.90	3.85	97.79
.56	14.22	1.83	46.48				

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. Exact shape of switch is optional provided outline dimensions specified are not exceeded and mounting holes and connector locations are as specified.
4. Unless otherwise specified, tolerances are ± .005 (.13 mm) for three place decimals and = .02 (.51 mm) for two place decimals.

Source: https://assist.dla.mil -- Downloaded: 20260-17T12:12Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1. Dimensions, configuration and electrical schematic: See figure.
2. Operating pressure, tolerances, electrical ratings: See Table I (Operating characteristics)
3. Environmental requirements, type and fatigue grades. See Table II.
4. Seal: Electrical Chamber: Hermetic
   Pressure Chamber Hermetic
   Reference Chamber Hermetic
5. Operating voltage 28 VDC
6. Weight Max: .8 lbs. max
7. Media: Fuel JP4 and/or day air
8. Pressure port 7/16-20 UNF PER AND MS33649-4
9. Electrical connector See figure
10. Dielectric (at reduced barometric pressure) applicable
11. Moisture resisting load voltage 100 VDC
12. Connector torque Applicable
13. External adjustment provision is required

TABLE I OPERATING CHARACTERISTICS

DASH NO.	FIG NO.	PRESSURE PSIA (PBS/SQ IN) ABSOLUTE					
		SWITCH SETTINGS		DEAD BAND MINN	SYSTEM	PROOF	BURST
		Increasing	Decreasing				
-01	I	+ 1.5 14.5 -000	12 + 1	1.5	60	120	180
-02	II	9.00 max	8.30 ± .34	.15	15	104	180
-03	III	6.6 max	5.94 ± .34	.18	15	104	180

Source: https://assist.dla.mil -- Downloaded: 20261O-17T12:12Z
Check the source to verify that this is the current version before use.

-01	1	I	B	C	D	E	D	-	B	B	A	B	C	C	B	A			
-02	2	I	A	B	D	E	D	-	A	B	A	B	C	A	A	A			1/
-03	3	I	A	B	D	E	D	-	A	B	A	C	C	A	A	A			

1/ Designates inactive for new design

Part number: Consist of the basic number of this specification sheet and a dash number taken from table 1.

Example: M9395/01-01
Basic Document Number Dash Number

Custodians:
Army - EL
Navy - EC
Air Force - 80

Review activities:
Army - AV
Navy - AS
Air Force - 11, 17, 80

User activities:
Army -
Navy - MC
Air Force -

Preparing activity:
Air Force - 80

Agent:
DSA - ES

(Project 5930-0880-3)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:12Z
Check the source to verify that this is the current version before use.