

MILITARY SPECIFICATION SHEET

HOLDERS, DISCHARGER, ELECTROSTATIC

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the holders described herein shall consist of this specification and the latest issue of MIL-D-9129.

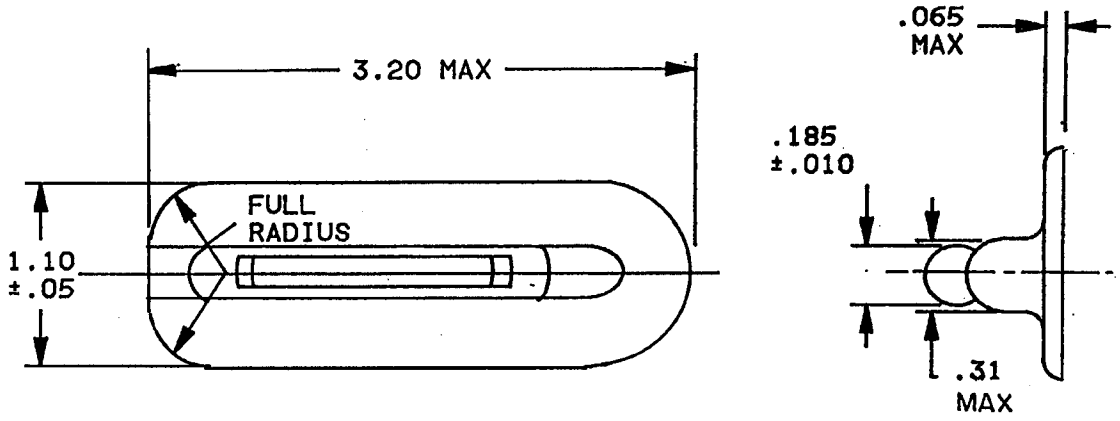

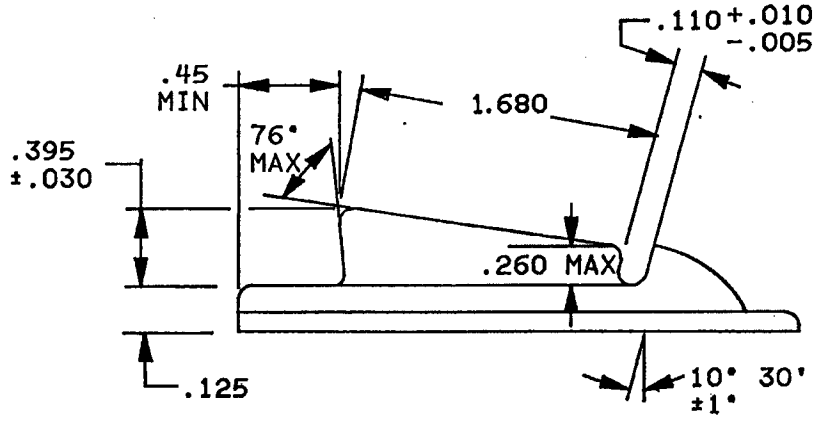


Inches	mm
.005	0.13
.010	0.25
.030	0.76
.05	1.3
.065	1.65
.110	2.79
.125	3.1
.185	4.70
.260	6.60
.31	7.9
.395	10.1
.45	11.4
1.10	27.9
1.680	42.61
3.20	81.3

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerances are ±.02 (0.51 mm) for two place decimals and ±.010 (0.25 mm) for three place decimals.

FIGURE 1. Dimensions and configuration.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:00Z
Check the source to verify that this is the current version before use.

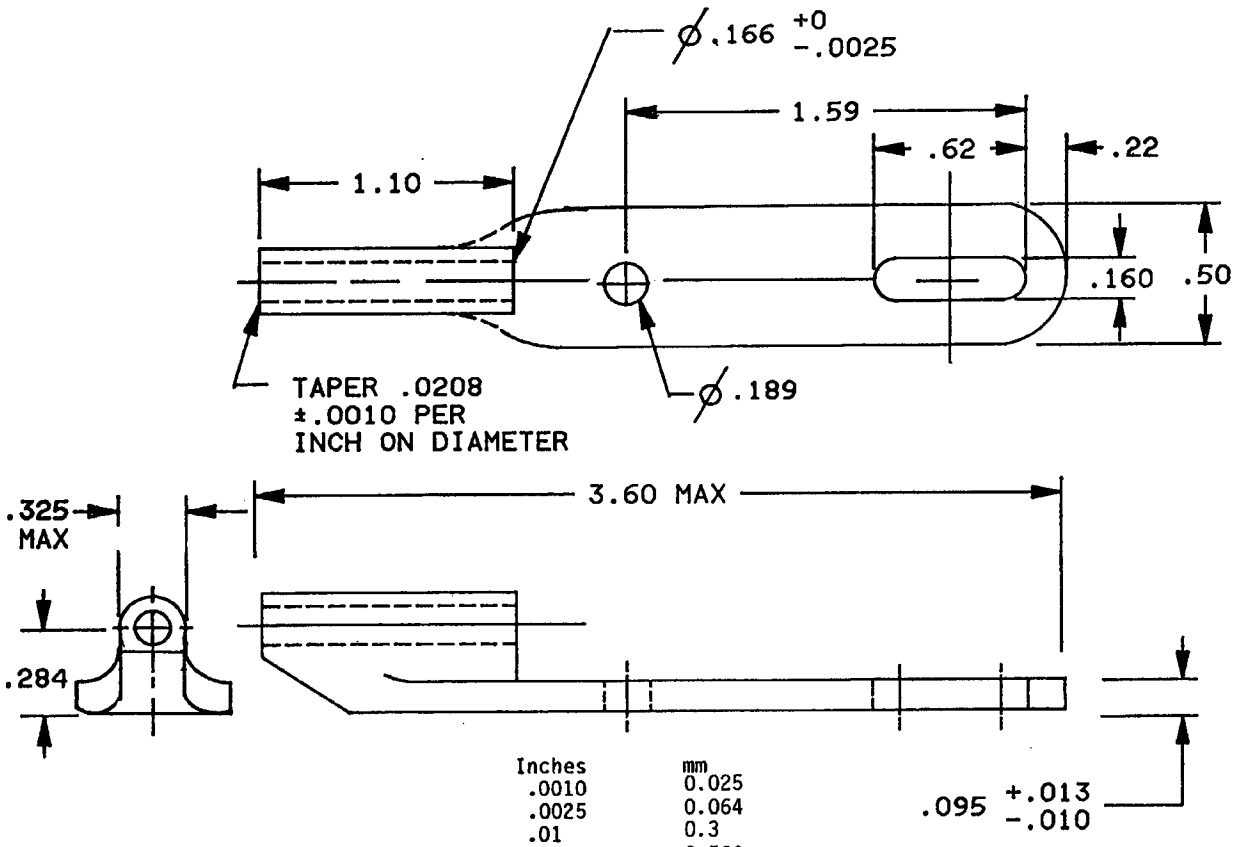


Inches	mm
.0010	0.025
.0025	0.064
.01	0.3
.0208	0.528
.095	2.41
.150	4.06
.166	4.22
.189	4.80
.22	5.6
.284	7.21
.325	8.26
.50	12.7
.62	15.8
1.10	27.9
1.59	40.4
3.60	91.4

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerances are ±.02 (0.51 mm) for two place decimals and ±.010 (0.25 mm) for three place decimals.

FIGURE 2. Dimensions and configuration.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:00Z
Check the source to verify that this is the current version before use.

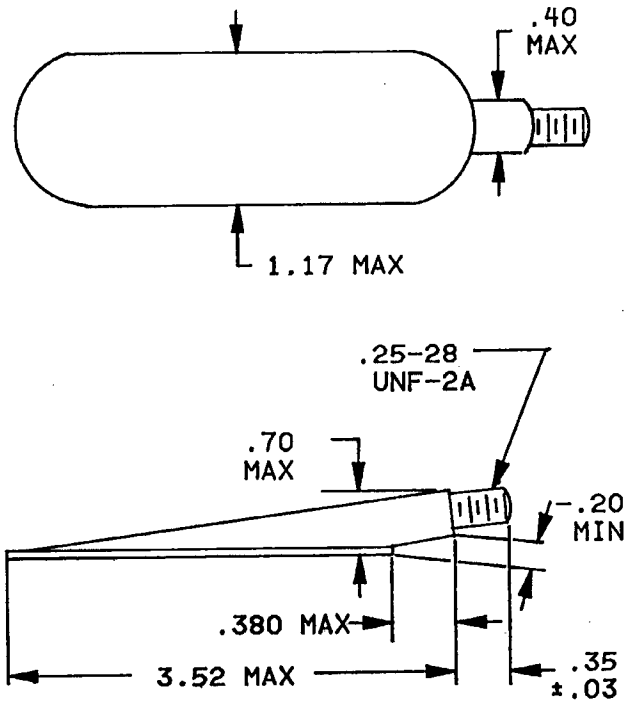


Inches	mm
.03	0.8
.20	5.1
.25	6.4
.35	8.9
.380	9.65
.40	10.2
.70	17.8
1.17	29.8
3.52	89.4

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerances are ±.02 (0.51 mm) for two place decimals and ±.010 (0.25 mm) for three place decimals.

FIGURE 3. Dimensions and configuration.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:00Z
Check the source to verify that this is the current version before use.

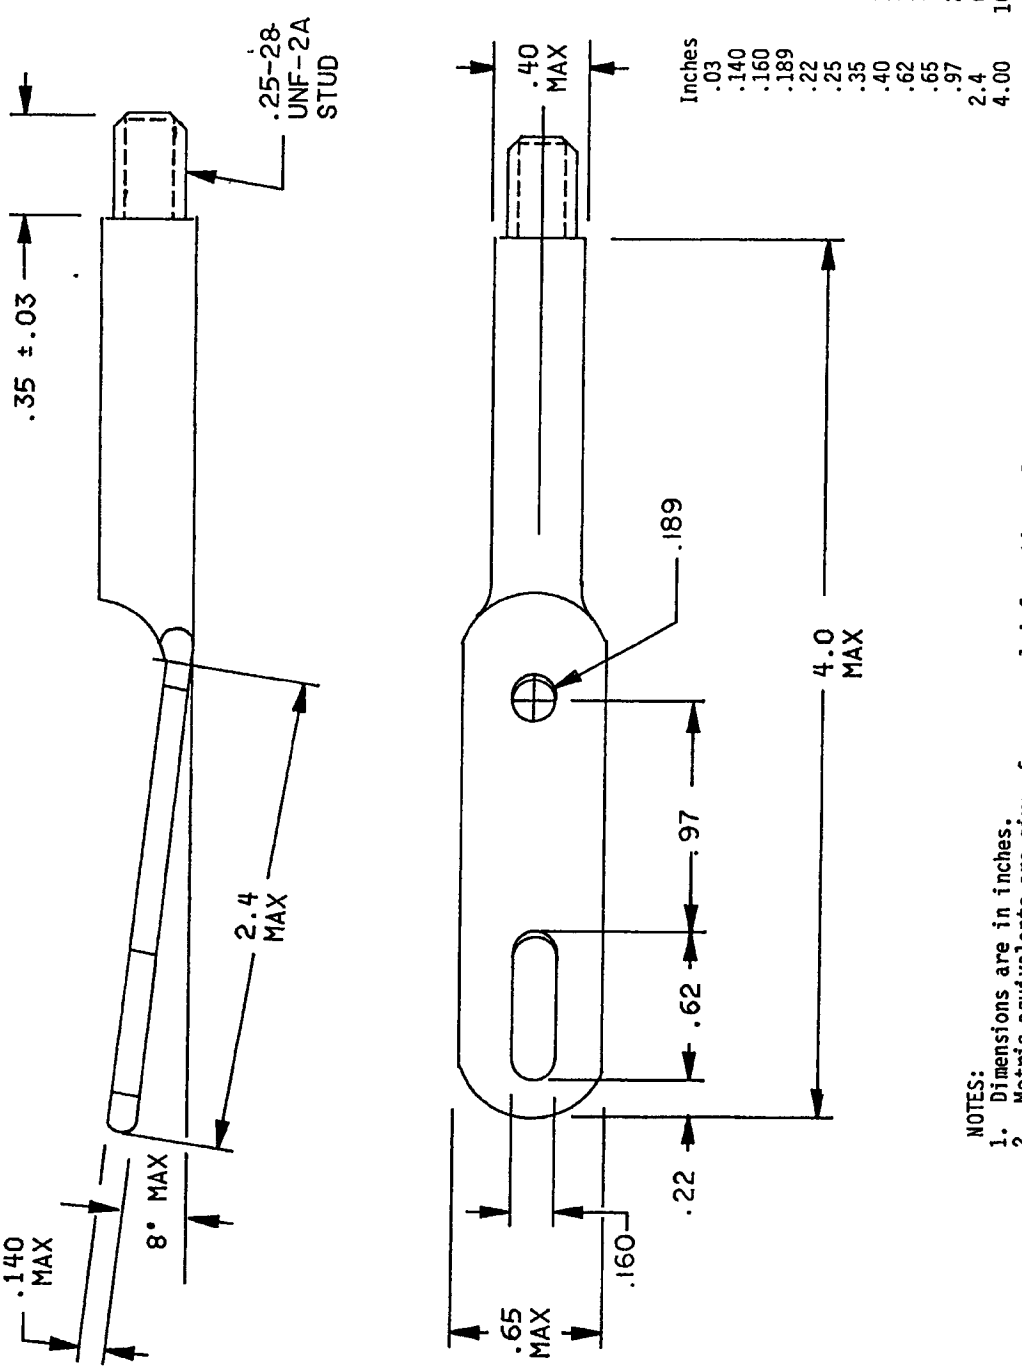


Inches	mm
.03	0.8
.140	3.56
.160	4.06
.189	4.80
.22	5.6
.25	6.4
.35	8.9
.40	10.2
.62	15.8
.65	16.5
.97	24.6
2.4	61.0
4.00	101.6

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerances are ±.02 (0.51 mm) for two place decimals and ±.010 (0.25 mm) for three place decimals.

FIGURE 4. Dimensions and configuration.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:00Z
Check the source to verify that this is the current version before use.

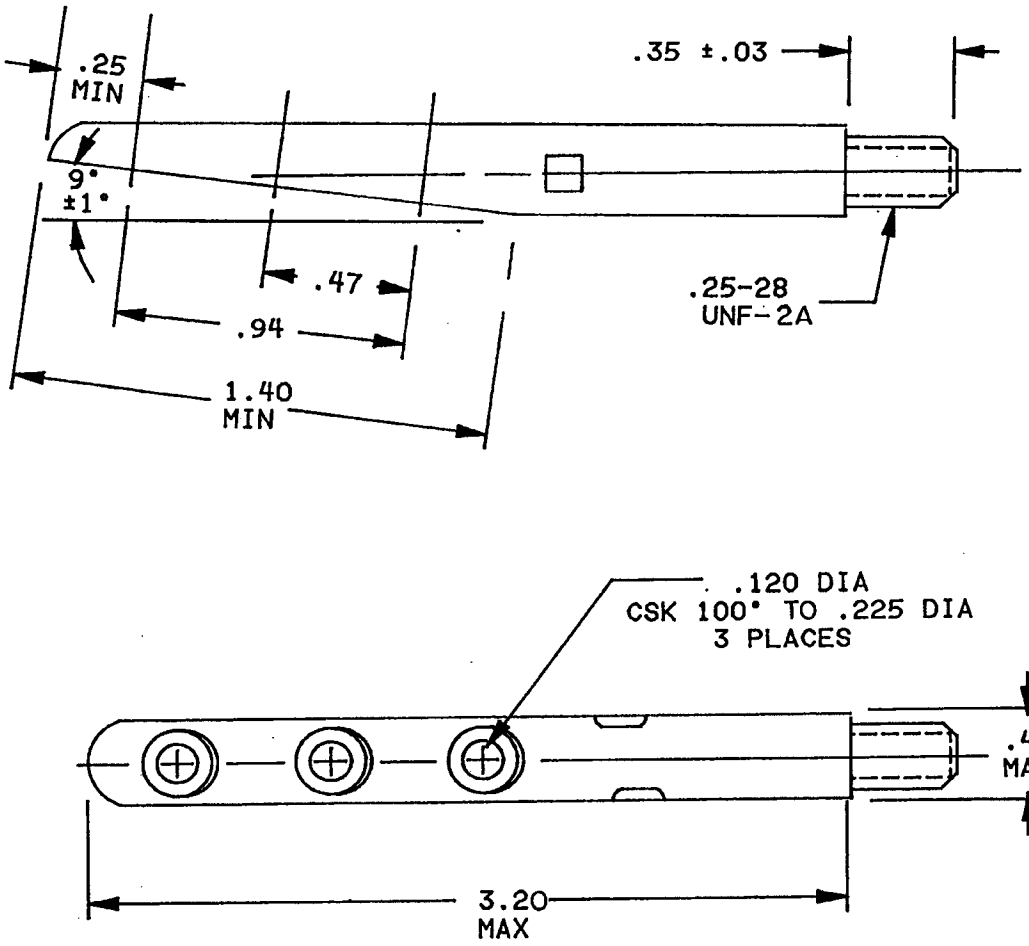


Inches	mm
.03	0.8
.120	3.05
.225	5.72
.25	6.4
.35	8.9
.40	10.2
.47	11.9
.94	23.9
1.40	35.6
3.20	38.8

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerances are ±.02 (0.51 mm) for two place decimals and ±.010 (0.25 mm) for three place decimals.

FIGURE 5. Dimensions and configuration.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:00Z
Check the source to verify that this is the current version before use.

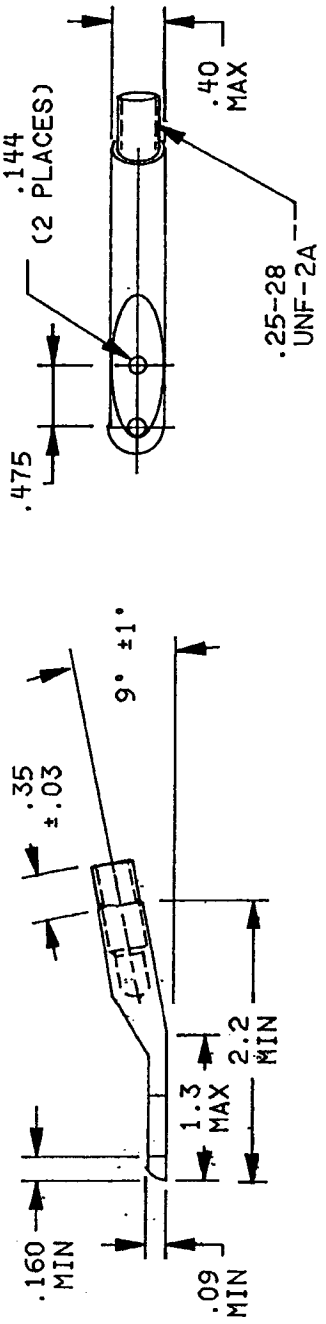


Inches	mm
.03	0.8
.09	2.3
.144	3.66
.160	4.06
.25	6.4
.35	8.9
.40	10.2
.475	12.1
1.3	33.0
2.2	55.9

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerances are ±.02 (0.51 mm) for two place decimals and ±.010 (0.25 mm) for three place decimals.

FIGURE 6. Dimensions and configuration.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:00Z
Check the source to verify that this is the current version before use.

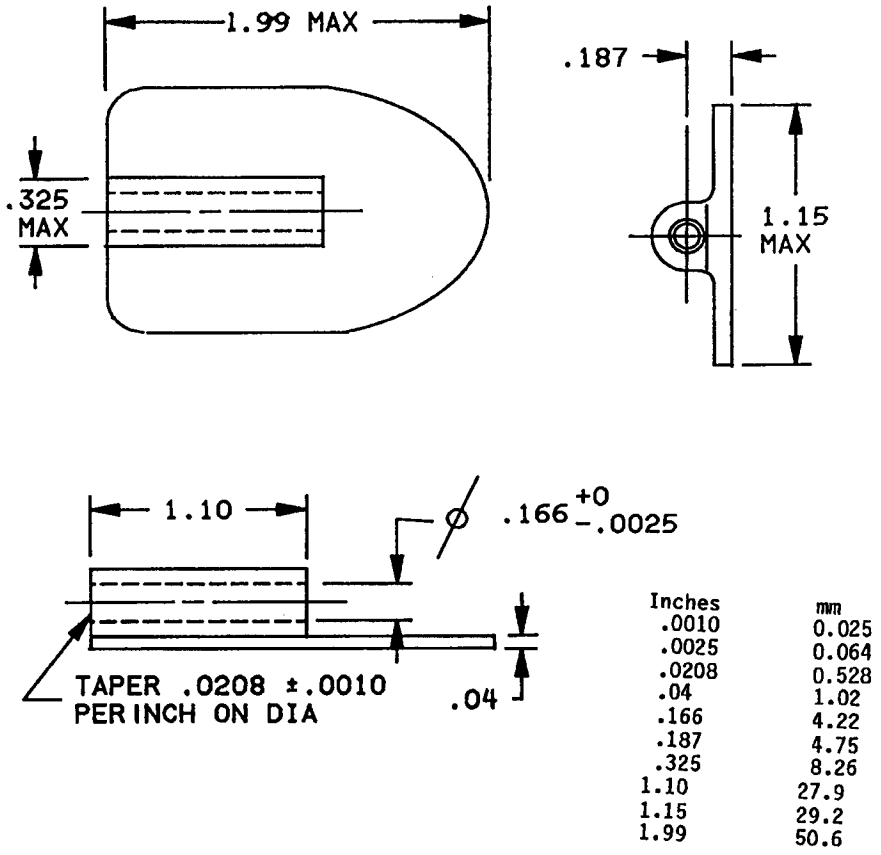


Inches	mm
.0010	0.025
.0025	0.064
.0208	0.528
.04	1.02
.166	4.22
.187	4.75
.325	8.26
1.10	27.9
1.15	29.2
1.99	50.6

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerances are ±.02 (0.51 mm) for two place decimals and ±.010 (0.25 mm) for three place decimals.

FIGURE 7. Dimensions and configuration.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:00Z
Check the source to verify that this is the current version before use.

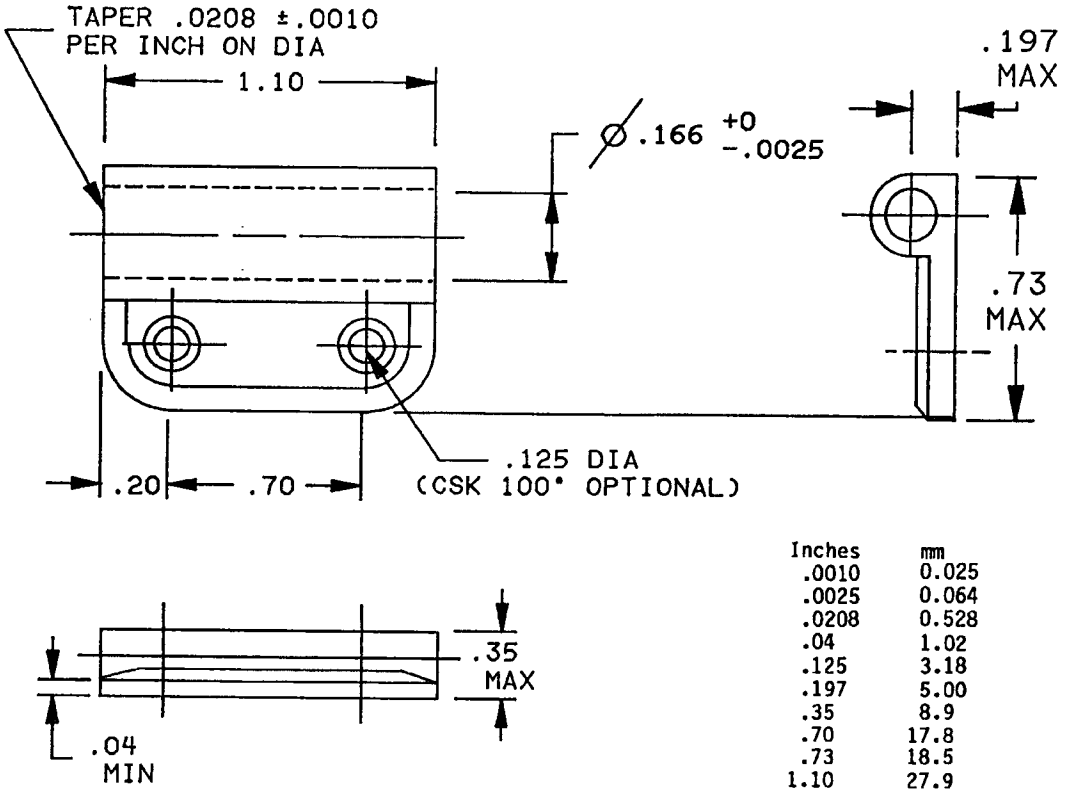


Inches	mm
.0010	0.025
.0025	0.064
.0208	0.528
.04	1.02
.125	3.18
.197	5.00
.35	8.9
.70	17.8
.73	18.5
1.10	27.9

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerances are ±.02 (0.51 mm) for two place decimals and ±.010 (0.25 mm) for three place decimals.

FIGURE 8. Dimensions and configuration.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:00Z
Check the source to verify that this is the current version before use.

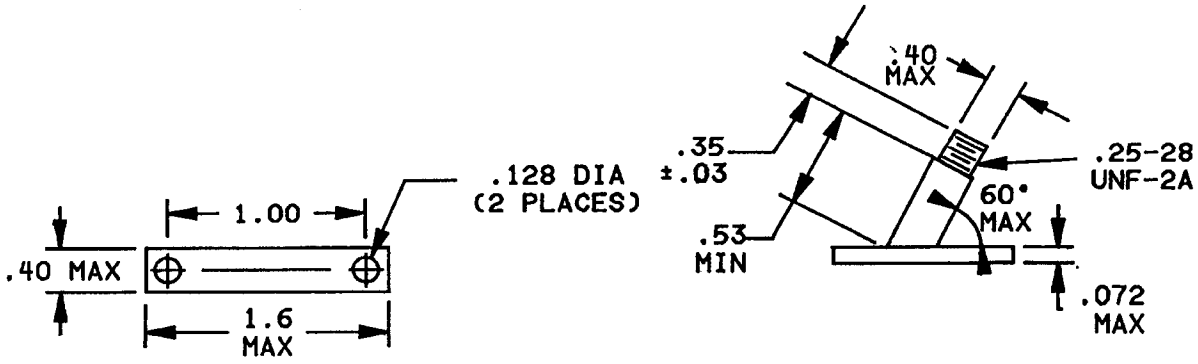


Inches	mm
.03	0.8
.072	1.83
.128	3.25
.25	6.4
.35	8.9
.40	10.2
.53	13.5
1.00	25.4
1.6	40.6


NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerances are ±.02 (0.51 mm) for two place decimals and ±.010 (0.25 mm) for three place decimals.


FIGURE 9. Dimensions and configuration.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:00Z
Check the source to verify that this is the current version before use.

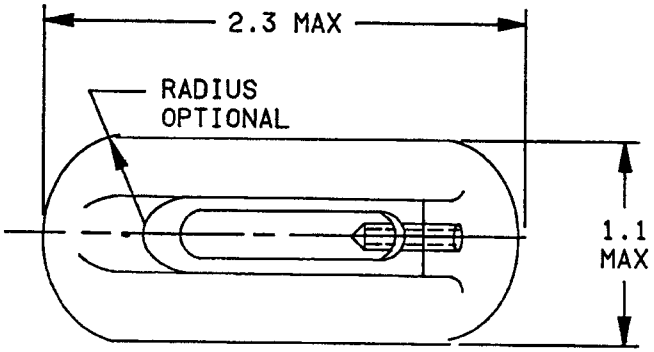

Style	Dimension R	Style	Dimension R
A	.50	H	2.81 ±.31
B	.38	J	4.16 ±.56
C	2.50	K	1.31 ±.06
D	2.18	L	3.46 ±.46
E	.689	M	.7 ±.1
F	5.00	N	.53 ±.06
G	1.51 ±.1	P	7.0 ±2.0

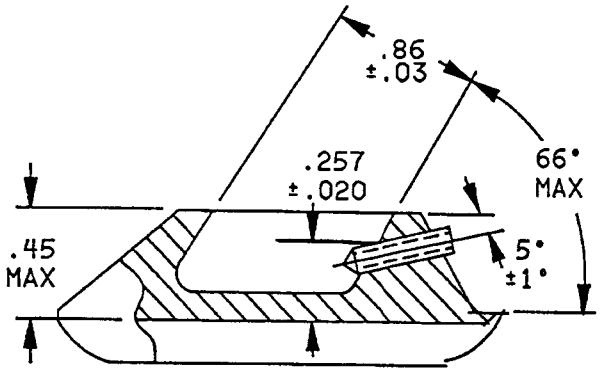

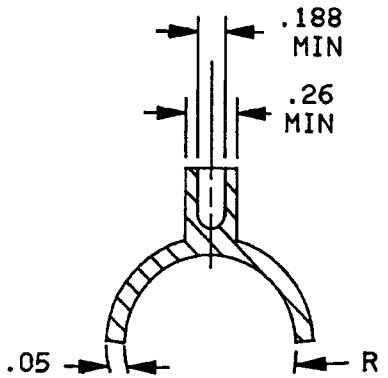


Inches	mm	Inches	mm
.020	0.51	.689	17.50
.03	0.8	.7	18.
.05	1.3	.86	21.8
.06	5.51	1.1	27.9
.188	4.78	1.51	38.4
.257	6.53	2.	51.
.26	6.6	2.18	55.4
.31	7.9	2.3	58.4
.38	9.8	2.50	63.5
.45	11.4	3.46	87.9
.46	11.7	4.16	104.7
.50	12.7	5.00	127.0
.53	13.5	7.	178.
.56	14.2	28.1	714.

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerances are ±.02 (0.51 mm) for two place decimals and ±.010 (0.25 mm) for three place decimals.

FIGURE 10. Dimensions and configuration.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:00Z
Check the source to verify that this is the current version before use.

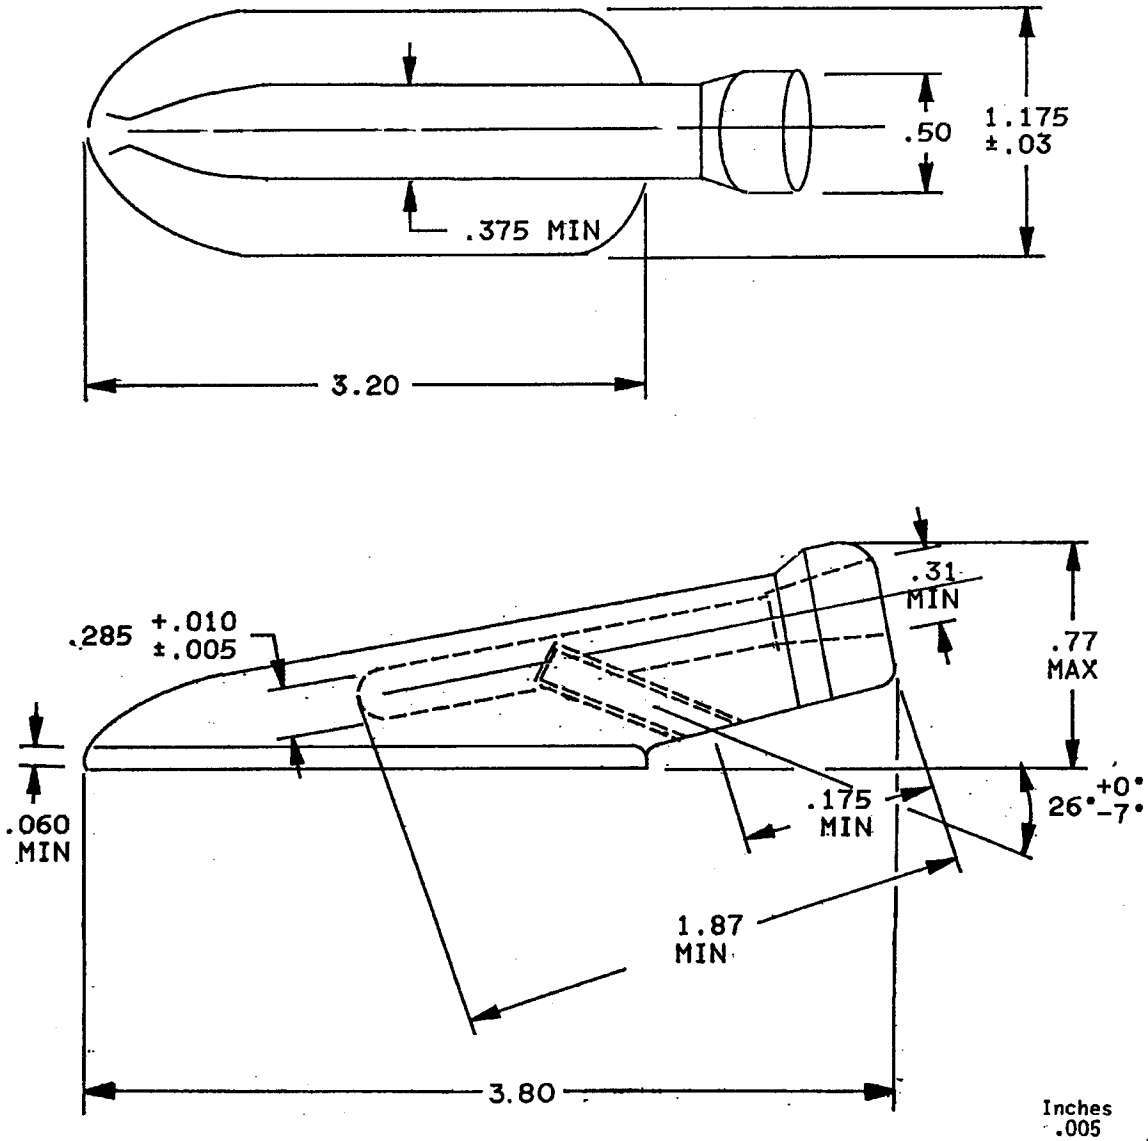

Inches	mm
.005	0.13
.010	0.25
.03	0.8
.060	1.52
.175	4.45
.285	7.24
.31	7.9
.375	9.53
.50	12.7
.77	19.6
1.175	29.85
1.87	47.5
3.20	81.3
3.80	96.5

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerances are ±.02 (0.51 mm) for two place decimals and ±.010 (0.25 mm) for three place decimals.

FIGURE 11. Dimensions and configuration.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:00Z
Check the source to verify that this is the current version before use.

PART NUMBER: M9129/09- (dash number from table I and reference to associated figure herein).

TABLE I. Part numbers.

M9129/09-	Figure 2/
01	1
02	2
03	3
04	4
05	5
06	6
07	7
08	8
09	9
10 1/	10
11	11

1/ Dash 10 will include a suffix to represent the radius shown on figure 10. Each radius is identified by a style letter. Example of the part number: M9129/09-10B.

2/ For applications requiring lightning survivability, only holders 1, 3, 7, 10 and 11 shall be used with the appropriate P-type dischargers.

QUALITY ASSURANCE PROVISIONS:

Qualification: Qualification testing for holders shall include two samples, each being sequentially tested to vibration, lightning transfer and salt spray with a mating discharger.

Custodians:
Army - ER
Navy - SH
Air Force - 85

Review activities:
Army - CE, MI
Air Force - 11, 17, 99

User activities:
Navy - MC
Air Force - 14, 19

Preparing activity:
Air Force - 85

Agent:
DLA - ES

(Project 5920-0409-9)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:00Z
Check the source to verify that this is the current version before use.