
INCH-POUND
MIL-DTL-9129/9A
w/AMENDMENT 1
21 October 2019
SUPERSEDING
MIL-DTL-9129/9A
26 March 2009

DETAIL SPECIFICATION SHEET

HOLDERS, DISCHARGER, ELECTROSTATIC

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-9129.

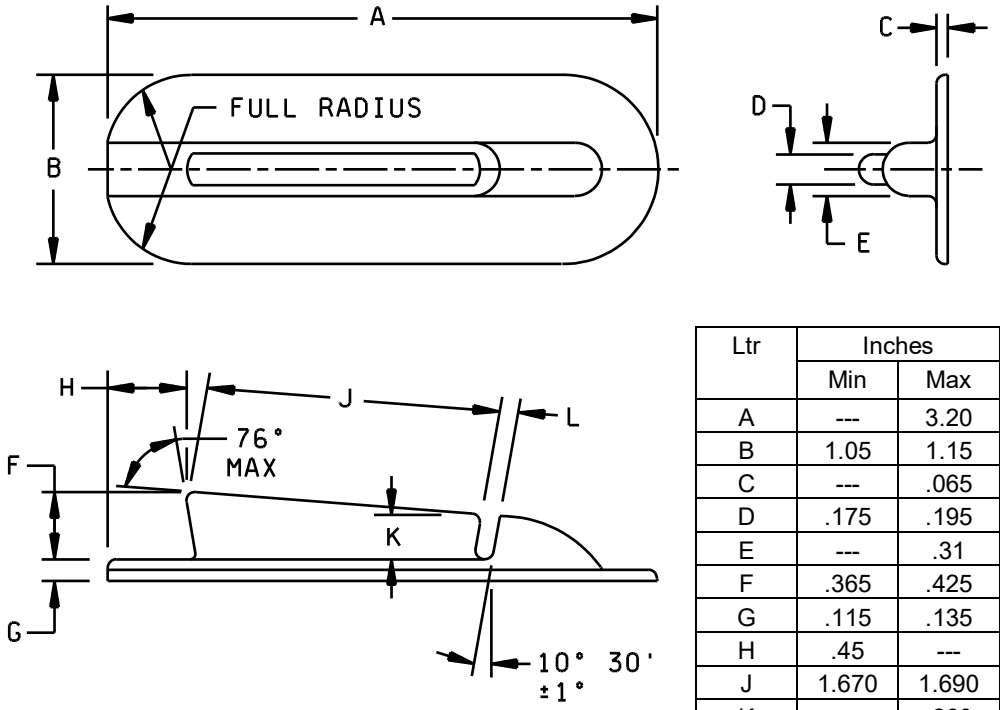

Ltr	Inches		mm	
	Min	Max	Min	Max
A	---	3.20	---	81.3
B	1.05	1.15	26.7	29.2
C	---	.065	---	1.65
D	.175	.195	4.45	4.95
E	---	.31	---	7.9
F	.365	.425	9.27	10.80
G	.115	.135	2.92	3.43
H	.45	---	11.4	---
J	1.670	1.690	42.42	42.93
K	---	.260	---	6.60
L	.105	.115	2.67	2.92


NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerances are ± .02 (0.51 mm) for two place decimals and ± .010 (0.25 mm) for three place decimals.

FIGURE 1. Dimensions and configurations for PIN M9129/09-01.

AMSC N/A

FSC 5920

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:59Z
Check the source to verify that this is the current version before use.

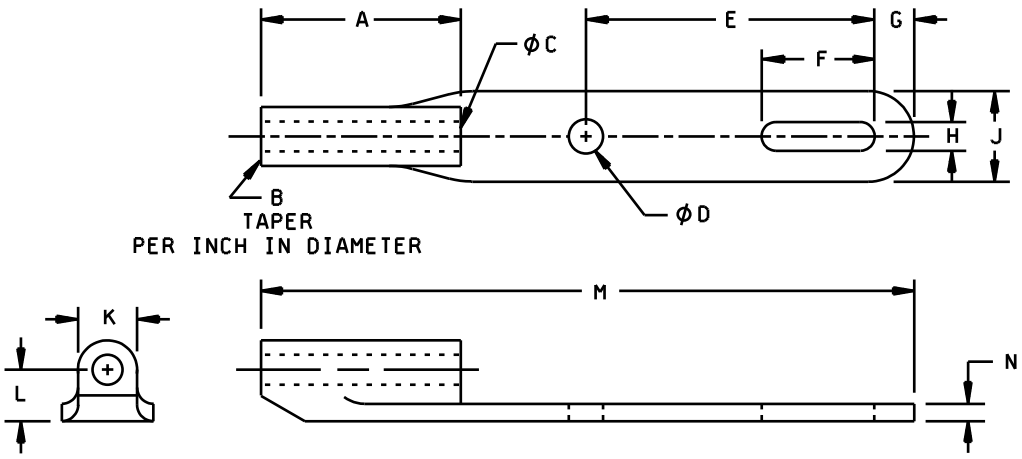


Ltr	Inches		mm	
	Min	Max	Min	Max
A	1.00	1.20	25.4	30.5
B	.0198	.0218	0.50	0.55
C	.163	.166	4.14	4.22
D	.179	.199	4.55	5.05
E	1.57	1.61	39.9	40.9
F	.60	.64	15.2	16.3
G	.20	.24	5.1	6.1
H	.150	.170	3.81	4.32
J	.48	.52	12.2	13.2
K	---	.325	---	8.25
L	.274	.294	6.96	7.47
M	---	3.60	---	91.4
N	.085	.108	2.16	2.74

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerances are ± .02 (0.51 mm) for two places decimals and ± .010 (0.25 mm) for three place decimals.

FIGURE 2. Dimensions and configuration for PIN M9129/09-02.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:59Z
Check the source to verify that this is the current version before use.

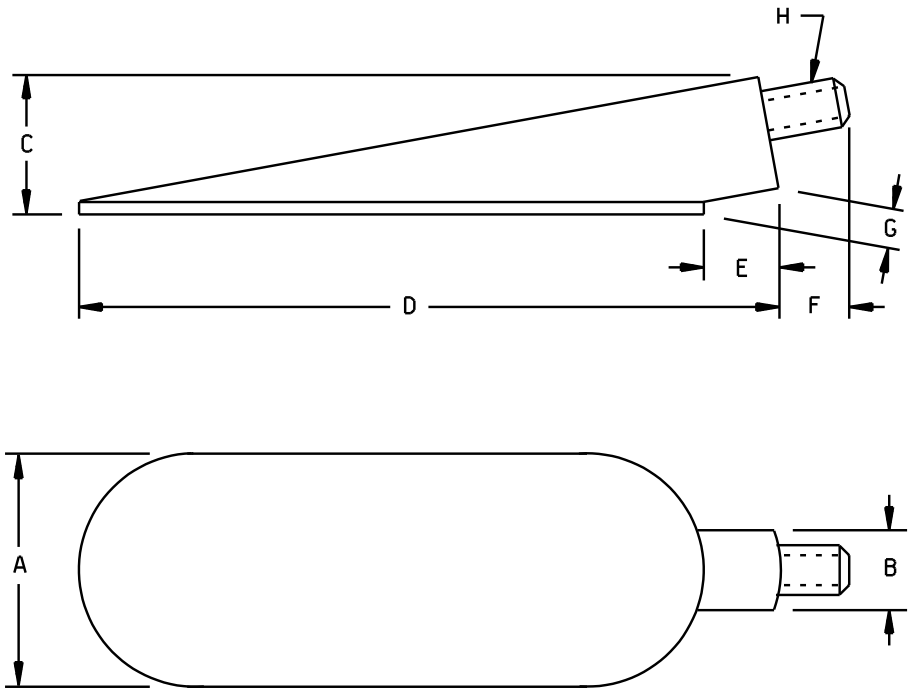


NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerances are ± .02 (0.51 mm) for two places decimals and ± .010 (0.25 mm) for three place decimals.

Ltr	Inches		mm	
	Min	Max	Min	Max
A	---	1.17	---	29.7
B	---	.40	---	10.2
C	---	.70	---	17.8
D	---	3.52	---	89.4
E	---	.380	---	9.65
F	.32	.38	8.1	9.6
G	.20	---	5.1	---
H	.23	.27	5.8	6.9

FIGURE 3. Dimensions and configuration for PIN M9129/09-03.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:59Z
Check the source to verify that this is the current version before use.

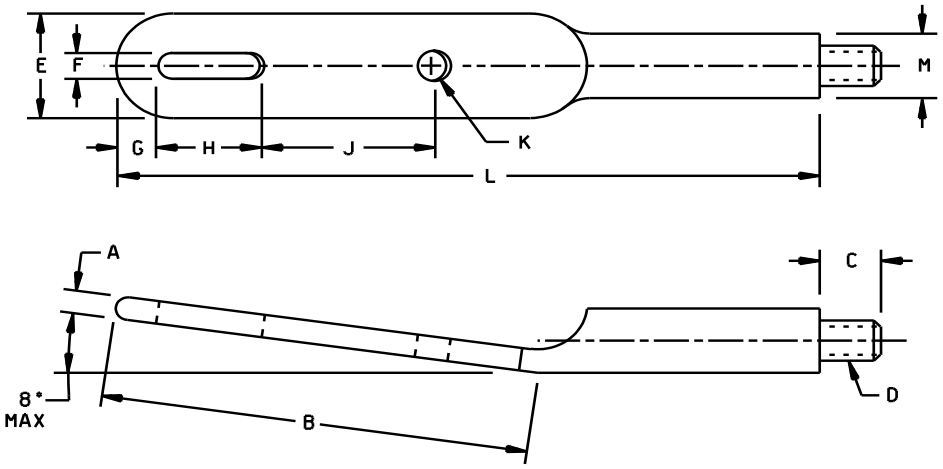


Ltr	Inches		mm	
	Min	Max	Min	Max
A	---	.140	---	3.56
B	---	2.4	---	60.9
C	.32	.38	8.1	9.6
D	.23	.27	5.8	6.9
E	---	.65	---	16.5
F	.150	.170	3.81	4.32
G	.20	.24	5.1	6.1
H	.60	.64	15.2	16.3
J	.95	.99	24.1	25.1
K	.179	.199	4.55	5.05
L	---	4.0	---	102
M	---	.40	---	10.2

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerances are ± .02 (0.51 mm) for two places decimals and ± .010 (0.25 mm) for three place decimals.

FIGURE 4. Dimensions and configuration for PIN M9129/09-04.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:59Z
Check the source to verify that this is the current version before use.

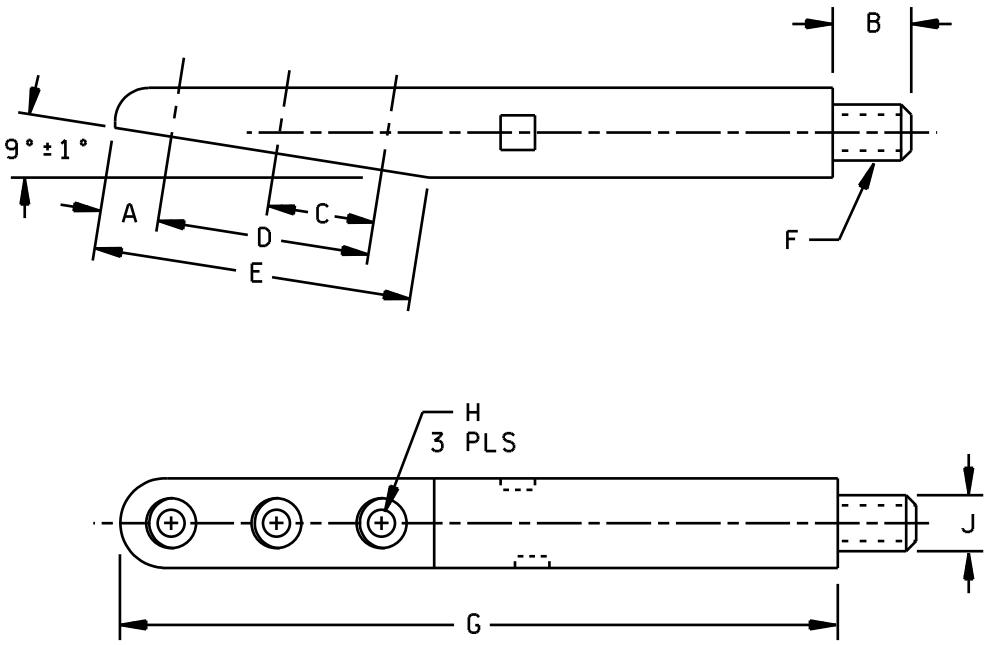


Ltr	Inches		mm	
	Min	Max	Min	Max
A	.25	---	6.3	---
B	.32	.38	8.1	9.6
C	.45	.49	11.4	12.4
D	.92	.96	23.4	24.4
E	1.40	---	35.6	---
F	.23	.27	5.8	6.9
G	---	3.20	---	81.3
H 1/	.120	.225	3.05	5.72
J	---	.42	---	10.7

1/ Countersunk

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerances are ± .02 (0.51 mm) for two places decimals and ± .010 (0.25 mm) for three place decimals.

FIGURE 5. Dimensions and configuration for PIN M9129/09-05.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:59Z
Check the source to verify that this is the current version before use.

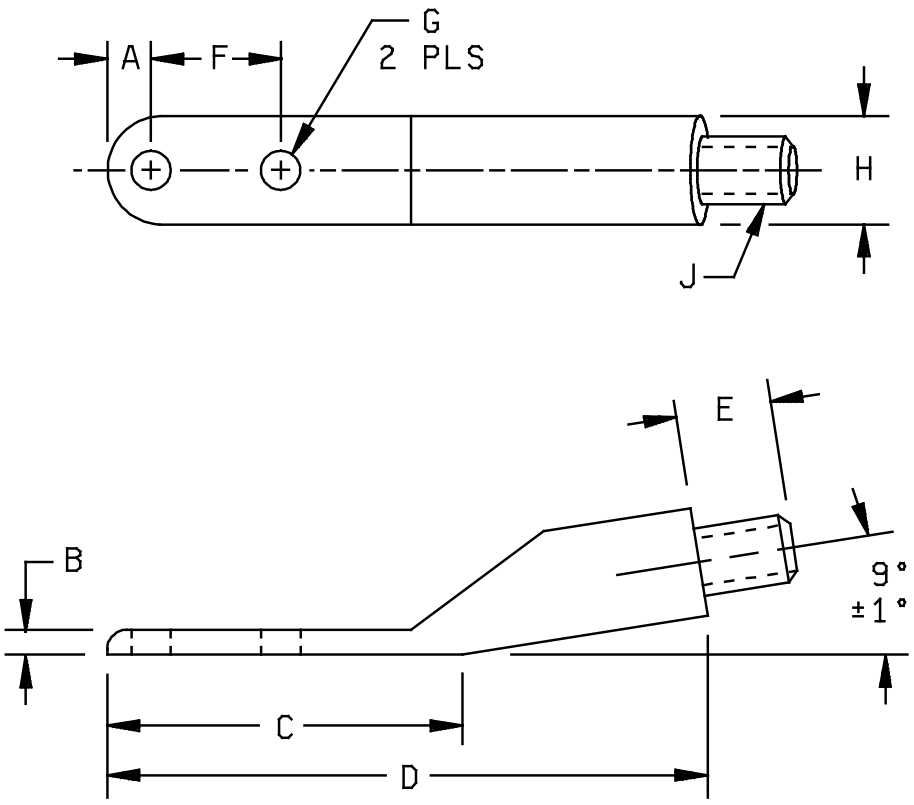


Ltr	Inches		mm	
	Min	Max	Min	Max
A	.160	---	4.06	---
B	.09	---	2.3	---
C	---	1.3	---	33
D	2.2	---	56	---
E	.32	.38	8.1	9.6
F	.465	.485	11.81	12.32
G	.134	.154	3.40	3.91
H	---	.40	---	10.2
J	.23	.27	5.8	6.9

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerances are ± .02 (0.51 mm) for two places decimals and ± .010 (0.25 mm) for three place decimals.

FIGURE 6. Dimensions and configuration for PIN M9129/09-06.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:59Z
Check the source to verify that this is the current version before use.

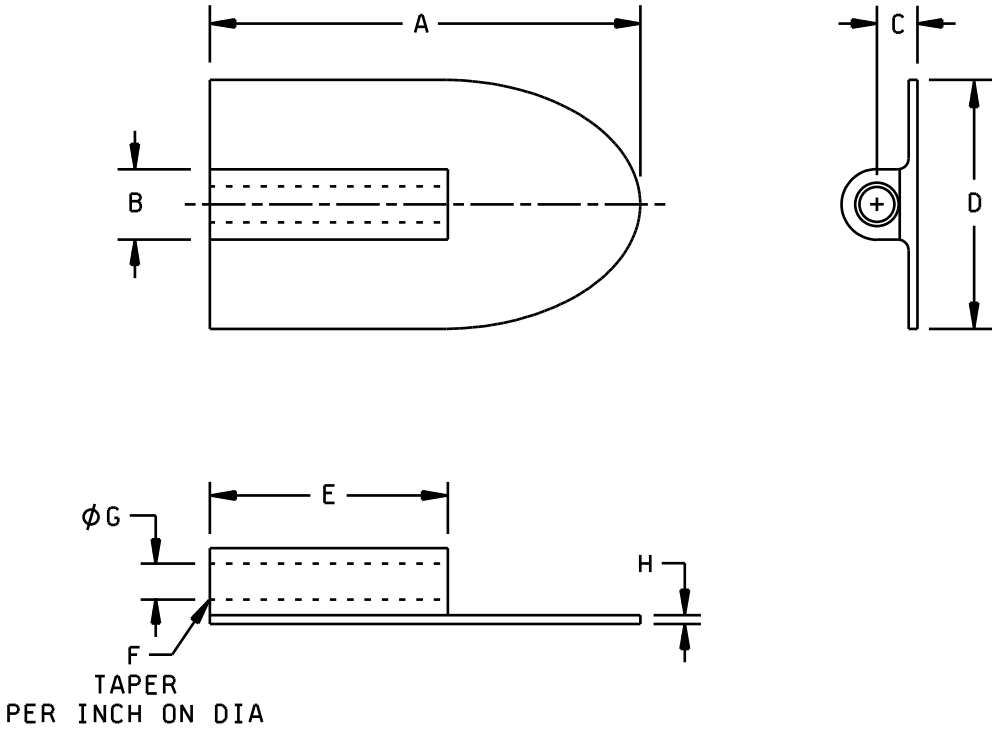


Ltr	Inches		mm	
	Min	Max	Min	Max
A	---	1.99	---	50.5
B	---	.325	---	8.2
C	.177	.197	4.50	5.00
D	---	1.15	---	29.2
E	1.08	1.12	27.4	28.4
F	.0198	.0218	0.503	0.554
G	.1635	.1660	4.153	4.216
H	.02	.06	0.5	1.5

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerances are ± .02 (0.51 mm) for two places decimals and ± .010 (0.25 mm) for three place decimals.

FIGURE 7. Dimensions and configuration for PIN M9129/09-07.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:59Z
Check the source to verify that this is the current version before use.

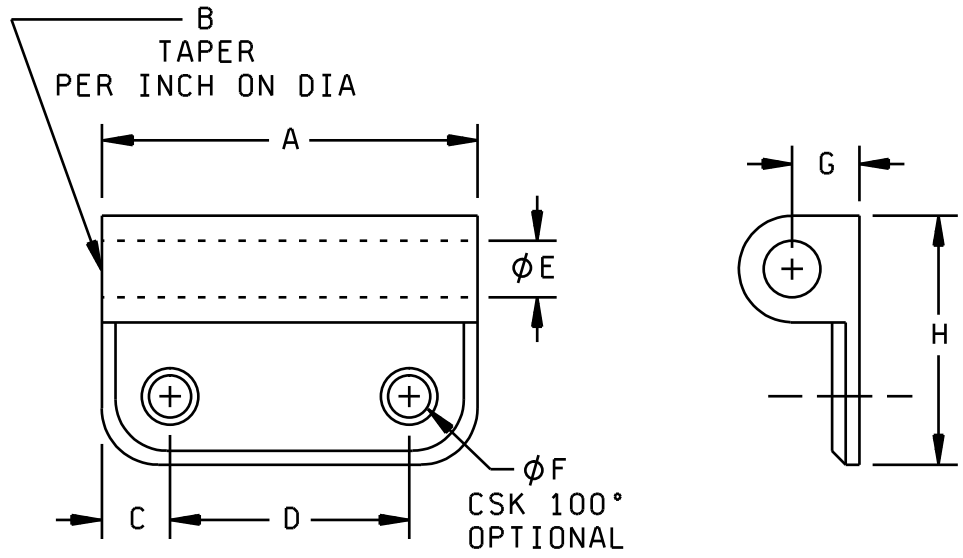



Ltr	Inches		mm	
	Min	Max	Min	Max
A	1.08	1.12	27.4	28.4
B	.0198	.0218	0.503	0.554
C	.18	.22	4.6	5.6
D	.68	.72	17.3	18.3
E	.1635	.1660	4.153	4.216
F	.115	.135	2.92	3.43
G	---	.197	---	5.00
H	---	.73	---	18.5
J	.04	---	1.0	---
K	---	.35	---	8.9

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerances are ± .02 (0.51 mm) for two places decimals and ± .010 (0.25 mm) for three place decimals.

FIGURE 8. Dimensions and configuration for PIN M9129/09-08.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:59Z
Check the source to verify that this is the current version before use.

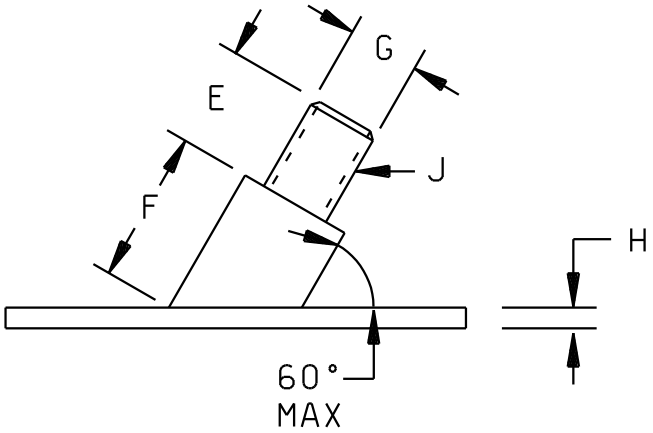

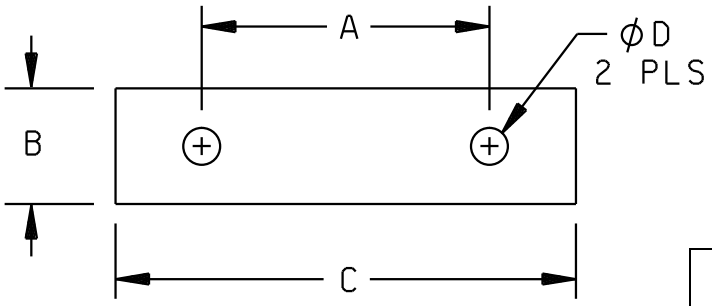

Ltr	Inches		mm	
	Min	Max	Min	Max
A	.98	1.02	24.9	25.9
B	---	.40	---	10.2
C	---	1.6	---	40.6
D	.118	.138	3.00	3.51
E	.32	.38	8.1	9.7
F	.53	---	13.5	---
G	---	.40	---	10.2
H	---	.072	---	1.83
J	.23	.27	5.8	6.9

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerances are ± .02 (0.51 mm) for two places decimals and ± .010 (0.25 mm) for three place decimals.

FIGURE 9. Dimensions and configuration for PIN M9129/09-09.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:59Z
Check the source to verify that this is the current version before use.

Style	Dimension R	Style	Dimension R
A	.50	H	2.81 ± .31
B	.38	J	4.16 ± .56
C	2.50	K	1.31 ± .06
D	2.18	L	3.46 ± .46
E	.689	M	.7 ± .1
F	5.00	N	.53 ± .06
G	1.51 ± .1	P	7.0 ±2.0

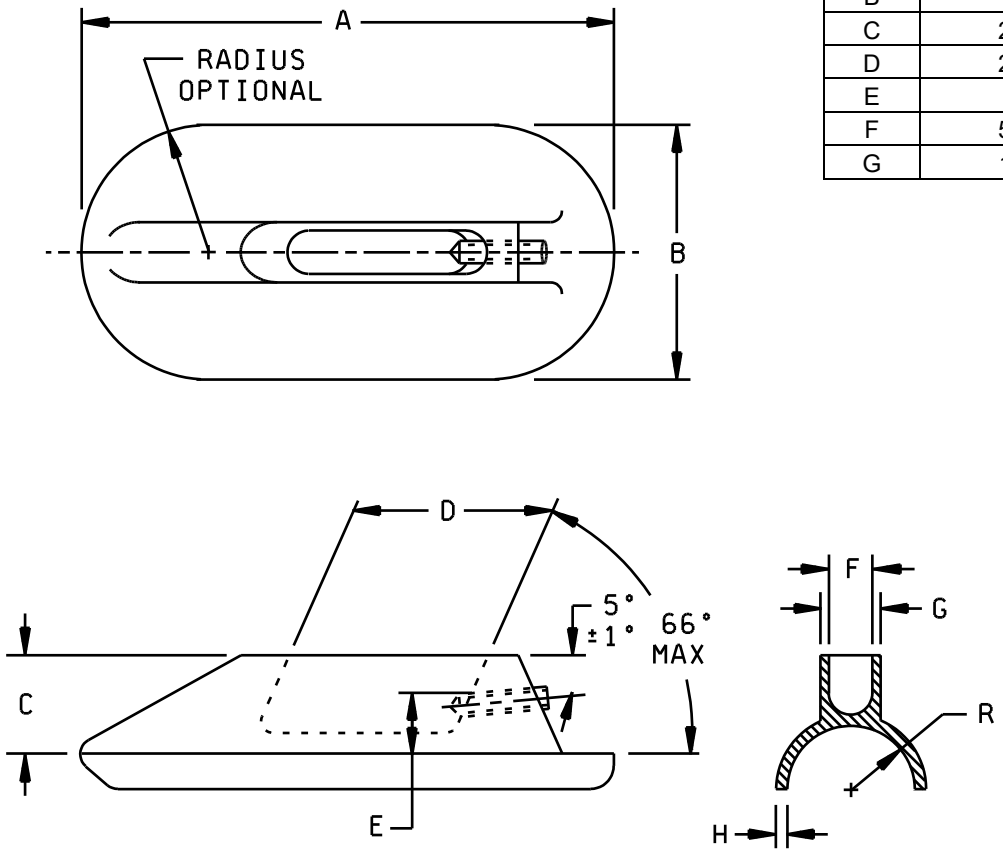


FIGURE 10. Dimensions and configuration for PIN M9129/09-10.


Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:59Z
Check the source to verify that this is the current version before use.

Ltr	Inches		mm	
	Min	Max	Min	Max
A	---	2.3	---	58
B	---	1.1	---	28
C	---	.45	---	11.4
D	.83	.89	21.1	22.6
E	.237	.277	6.02	7.03
F	.188	---	4.77	---
G	.26	---	6.6	---
H	.03	.08	0.8	2.0

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerances are ± .02 (0.51 mm) for two places decimals and ± .010 (0.25 mm) for three place decimals.

FIGURE 10. Dimensions and configuration for PIN M9129/09-10 - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:59Z
Check the source to verify that this is the current version before use.

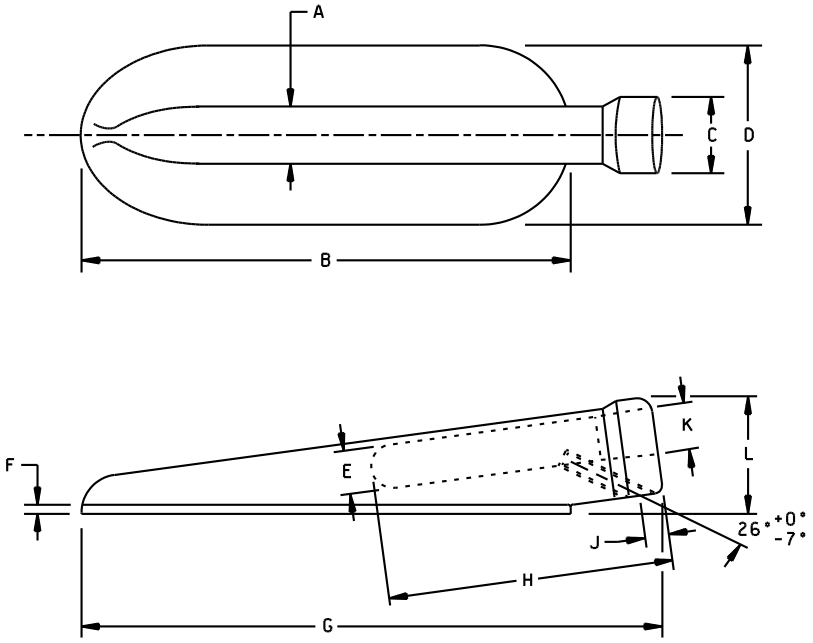

Ltr	Inches		mm	
	Min	Max	Min	Max
A	.375	---	9.52	---
B	3.18	3.22	80.8	81.8
C	.48	.52	12.2	13.2
D	1.145	1.205	29.08	30.61
E	.280	.295	7.11	7.49
F	.060	---	1.52	---
G	3.78	3.82	96.0	97.0
H	1.87	---	47.5	---
J	.175	---	4.44	---
K	.31	---	7.9	---
L	---	.77	---	19.6

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerances are ± .02 (0.51 mm) for two places decimals and ± .010 (0.25 mm) for three place decimals.

FIGURE 11. Dimensions and configuration for PIN M9129/09-11.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:59Z
Check the source to verify that this is the current version before use.

Part or Identifying Number (PIN): M9129/09- (dash number from table I and reference to associated figure herein).

TABLE I. PINs.

M9129/09-	Figure 2/
01	1
02	2
03	3
04	4
05	5
06	6
07	7
08	8
09	9
10 1/	10
11	11

1/ Dash 10 will include a suffix to represent the radius shown on figure 10. Each radius is identified by a style letter. Example of the part number: M9129/09-10B.

2/ For applications requiring lightning survivability, only holders 1, 3, 7, 10, and 11 shall be used with the appropriate P-type dischargers.

VERIFICATION:

First Article: First article testing for holders shall include two samples, each being sequentially tested to vibration, lightning transfer, and salt spray with a mating discharger.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:59Z
Check the source to verify that this is the current version before use.

Reference documents. This specification sheet only references MIL-DTL-9129.

Amendment notations. The margins of this specification sheet are marked with vertical lines to indicate modifications generated by this amendment. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

Custodians:
Army - CR
Navy - AS
Air Force - 85
DLA - CC

Preparing activity:
DLA - CC

(Project 5920-2019-006)

Review activities:
Army - CE, MI
Navy - MC
Air Force - 19

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:59Z
Check the source to verify that this is the current version before use.