MILITARY SPECIFICATION SHEET

CONNECTOR, AUDIO, AIRBORNE, PLUG, 4 CONTACT

This specification sheet is approved for use by the Air Force Acquisition Logistics Division, Electronic Support Division (AFALD/PTES), Gentile Air Force Station, Dayton, Ohio 45444, Department of the Air Force, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the connector described herein shall consist of this document and the latest issue of Specification MIL-C-9177.


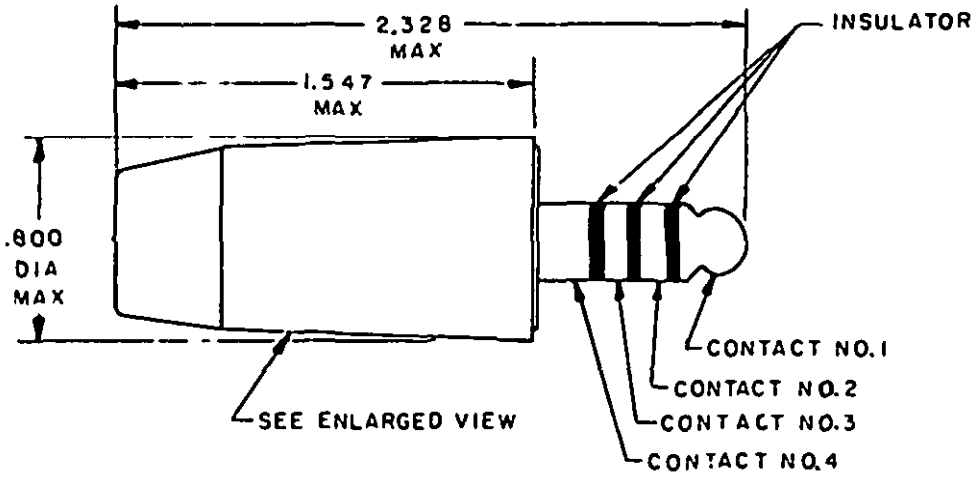


FIGURE 1. Dimensions and configurations.

Ⓐ denotes changes


FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:02Z
Check the source to verify that this is the current version before use.

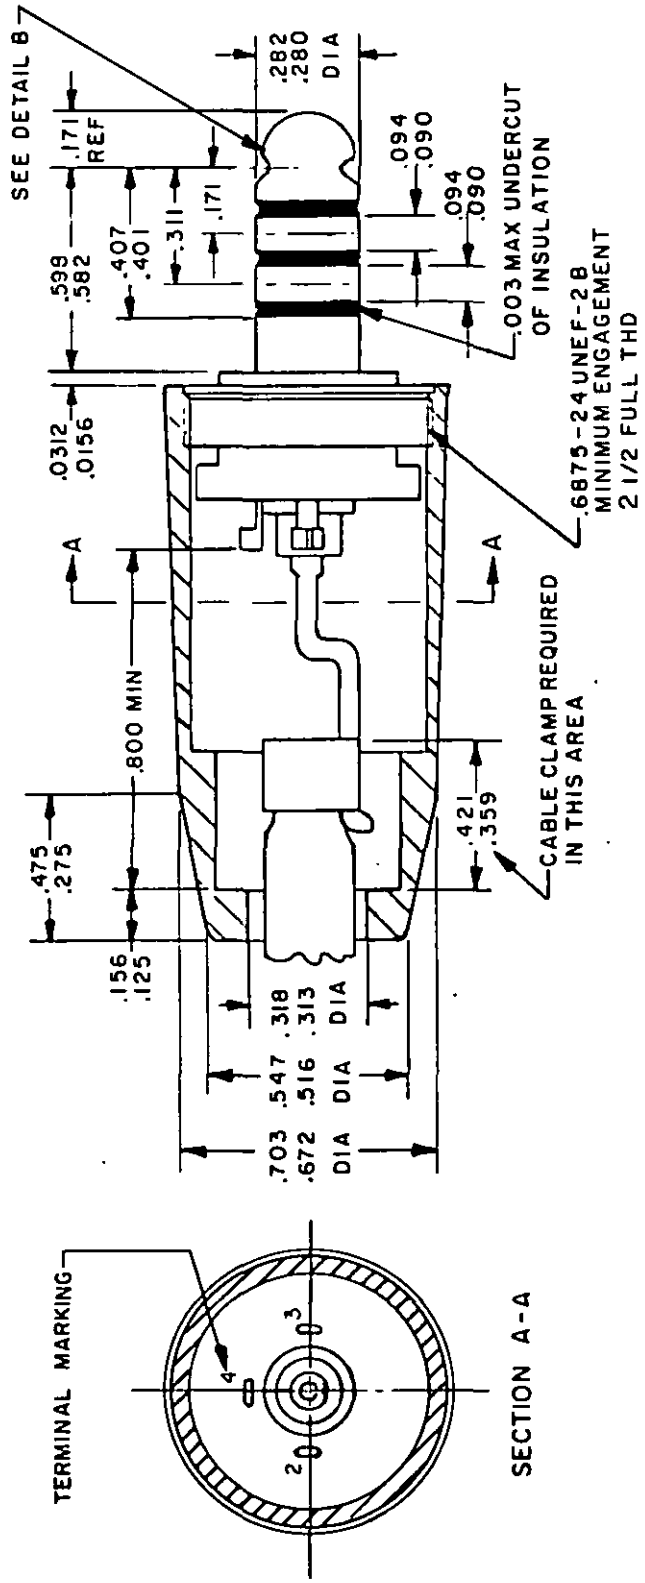


Ⓐ FIGURE 1. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:02Z
Check the source to verify that this is the current version before use.

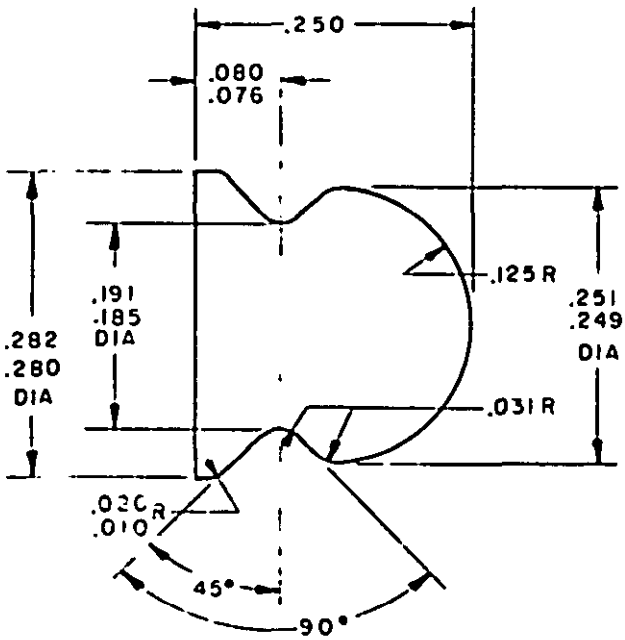

Ⓐ DETAIL B

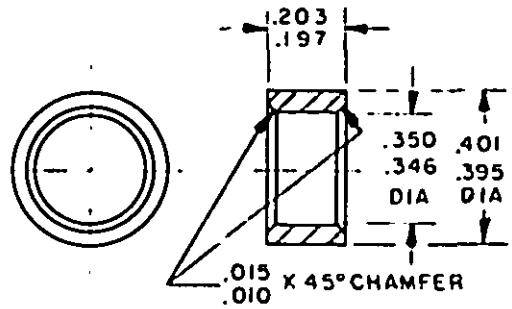

HEX CRIMP SLEEVE

Ⓐ

INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM
.003	.08	.125	3.18	.280	7.11	.421	10.69
.010	.25	.156	3.96	.282	7.16	.475	12.06
.015	.38	.171	4.34	.311	7.90	.516	13.11
.0156	.396	.185	4.70	.313	7.95	.547	13.89
.020	.51	.191	4.85	.318	8.08	.582	14.78
.031	.79	.197	5.00	.346	8.79	.598	15.19
.0312	.792	.203	5.16	.350	8.89	.672	17.07
.076	1.93	.249	6.32	.359	9.12	.703	17.86
.080	2.03	.250	6.35	.395	10.03	.800	20.32
.090	2.29	.251	6.38	.401	10.19	1.547	39.29
.094	2.39	.275	6.98	.407	10.34	2.328	59.13

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Unless otherwise specified, tolerance is ±.005 (.13 mm).
4. All dimensions are after plating.
5. All undimensioned pictorial representations are for reference purposes only.

FIGURE 1. Dimensions and configurations - Continued.

Source: https://assist.dla.mil --Downloaded: 2026-10-17T12:02Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Crimp sleeve: Crimp sleeve requirement is applicable.

Torque: Torque test is applicable.

Tool data: Use M22520/5-01 hand tool w/crimp die M22520/5-29, M22520/5-35, or M22520/5-55.

Controlled drop: Controlled drop test is applicable.

Stack assembly: Stack assembly test is applicable.

Static load: Static load test is applicable.

Insertion and withdrawal forces: The insertion and withdrawal forces shall be as specified:

Insertion force - - - - - 10 pounds (maximum).
Withdrawal force - - - - 6 pounds (minimum), 10 pounds (maximum).

Body and insulation: Polyvinylidene fluoride per MIL-P-46122; glass filled polycarbonates per MIL-P-81390; polycarbonate per L-P-393; and glass filled polystyrene per MIL-M-21347 are optional materials.

Shell: Optional material is Nylon Zytel ST801.

Cable retention: Cable retention test is applicable. The test cable shall be WF-14/U. The force shall be 30-pounds minimum.

Specified mating connector: For testing, the specified mating connector shall be M9177/3-1.

Ⓐ Marking: Identification marking shall include both the U-93A/U and the M9177/1-1 numbers.

Mating connectors: M9177/3-1, M9177/4-1 and M9177/5-1.

Part number: M9177/1-1.

Supersession data: M9177/1-1 supersedes U-93A/U.

Custodian:
Air Force - 85

Review activities:
Air Force - 11, 99
DLA - ES

User activities:
Air Force - 17, 19

Preparing activity:
Air Force - 85

(Project 5935-F158-1)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:02Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.
NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE

MIL-C-9177/1A(USAF)

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*

TELEPHONE NO.

DATE

DD FORM 1 OCT 78 1426 PREVIOUS EDITION WILL BE USED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:02Z
Check the source to verify that this is the current version before use.