MILITARY SPECIFICATION SHEET

CONNECTOR, AUDIO, AIRBORNE, PLUG, 4 CONTACT

This specification sheet is approved for use within the Electronic Support Division, Department of the Air Force, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the connector described herein shall consist of this specification and the latest issue of MIL-C-9177.

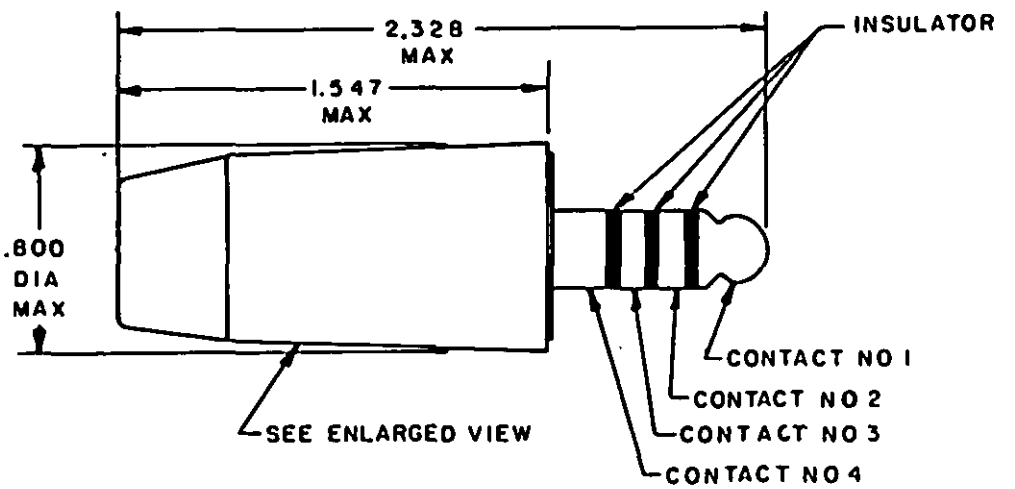


FIGURE 1. Dimensions and configurations.

Ⓑ denotes changes

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:01Z
Check the source to verify that this is the current version before use.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.


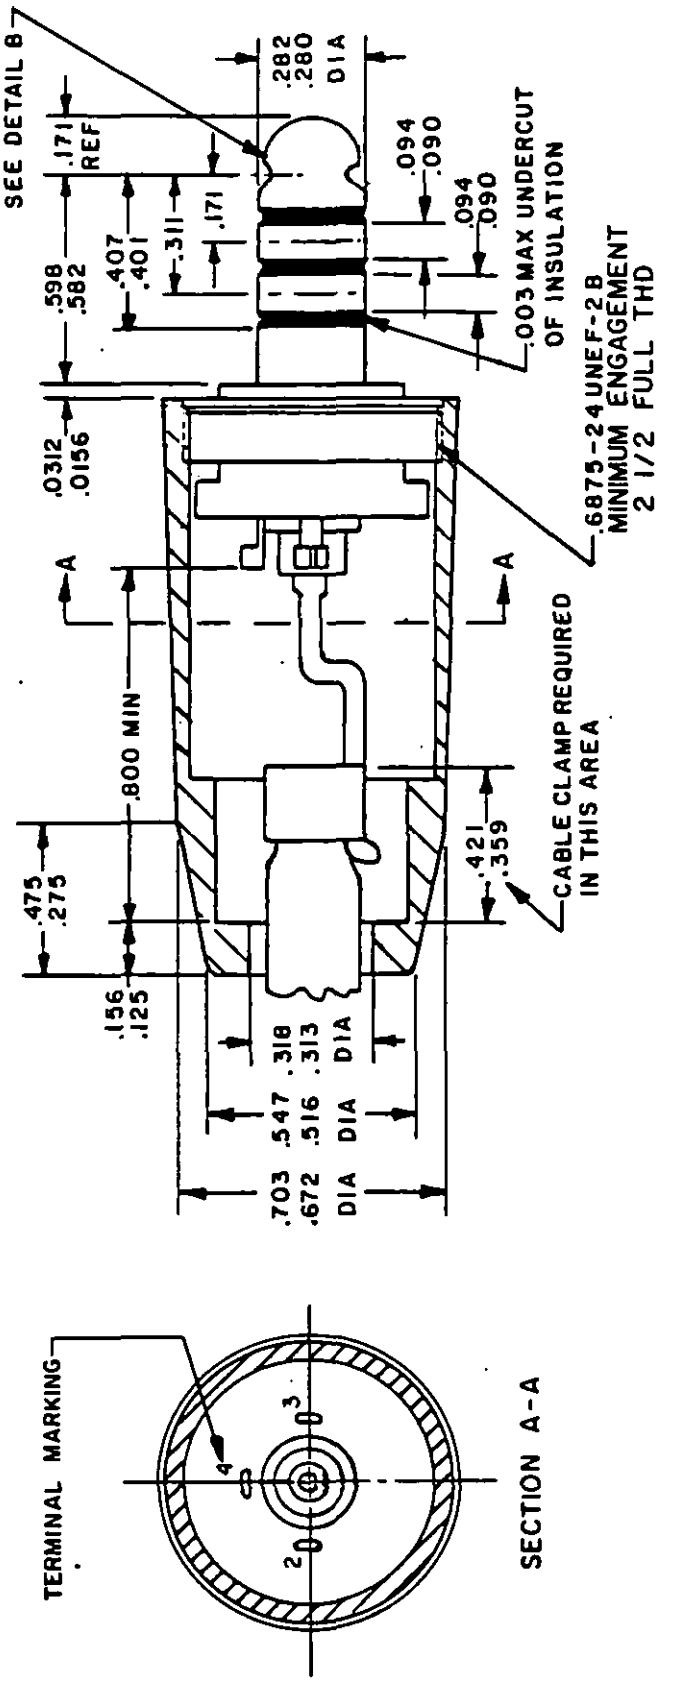


FIGURE 1. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:01Z
Check the source to verify that this is the current version before use.

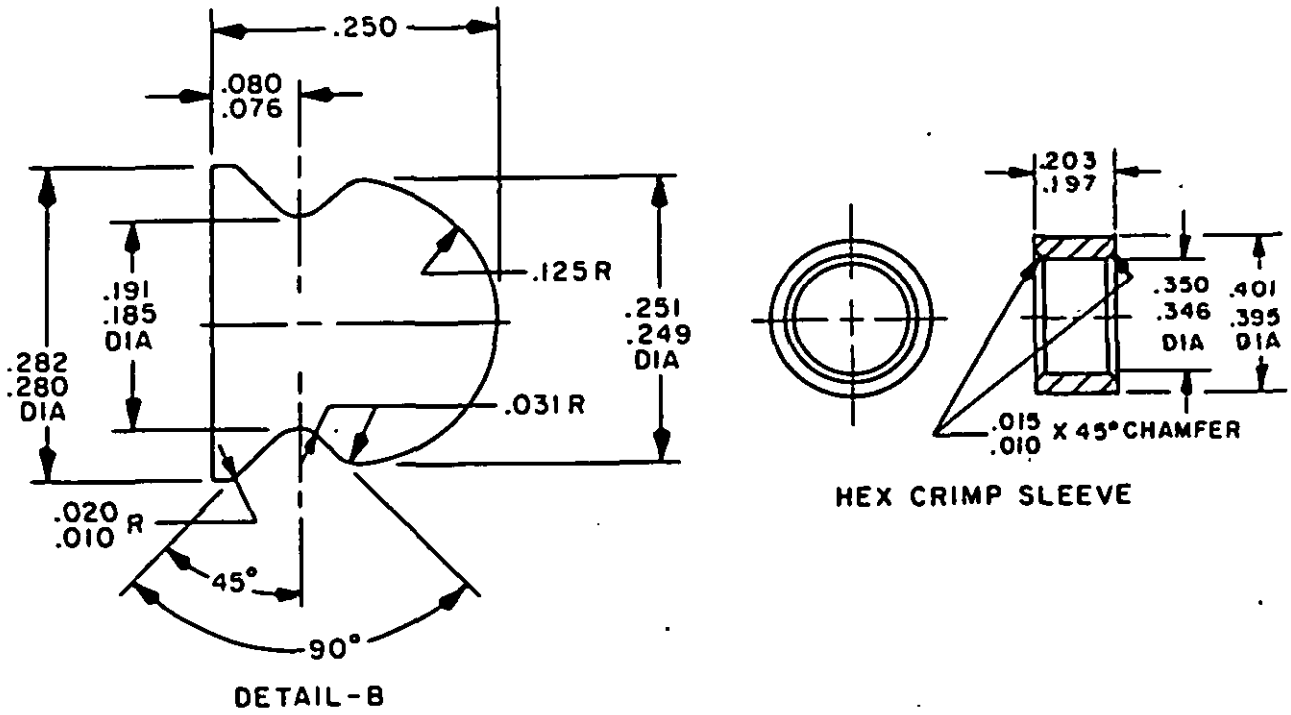

Inches	mm	Inches	mm	Inches	mm	Inches	mm
.003	0.08	.125	3.18	.280	7.11	.421	10.69
.010	0.25	.156	3.96	.282	7.16	.475	12.06
.015	0.38	.171	4.34	.311	7.90	.516	13.11
.0156	0.396	.185	4.70	.313	7.95	.547	13.89
.020	0.51	.191	4.85	.318	8.08	.582	14.78
.031	0.79	.197	5.00	.346	8.79	.598	15.19
.0312	0.792	.203	5.16	.350	8.89	.672	17.07
.076	1.93	.249	6.32	.359	9.12	.703	17.86
.080	2.03	.250	6.35	.395	10.03	.800	20.32
.090	2.29	.251	6.38	.401	10.19	1.547	39.29
.094	2.39	.275	6.98	.407	10.34	2.328	59.13

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ±.005 (0.13 mm).
4. All dimensions are after plating.
5. All undimensioned pictorial representations are for reference purposes only.

FIGURE 1. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:01Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Crimp sleeve: Crimp sleeve requirement is applicable.

Torque: Torque test is applicable.

Tool data: Use M22520/5-01 hand tool w/crimp die M22520/5-29, M22520/5-35, or M22520/5-55.

Controlled drop: Controlled drop test is applicable.

Stack assembly: Stack assembly test is applicable.

Static load: Static load test is applicable.

Insertion and withdrawal forces: The insertion and withdrawal forces shall be as specified:

Ⓑ Insertion force: 13 pounds maximum.
Withdrawal force: 6 pounds minimum, 10 pounds maximum.

Ⓑ Body and insulation: Material options are as follows:

a. Polyvinylidene fluoride in accordance with MIL-P-46122.
b. Glass-filled polycarbonates in accordance with MIL-P-81390.
c. Glass-filled nylon in accordance with L-P-395, type 2, class 3, grade A.

Ⓑ Shell: Optional materials are glass-filled nylon in accordance with L-P-395, type 1, class 2, grade A; nylon zytel ST801, and polycarbonate in accordance with L-P-393.

Cable retention: Cable retention test is applicable. The test cable shall be WF-14/U. The force shall be 30 pounds minimum.

Specified mating connector: For testing, the specified mating connector shall be M9177/3-1.

Marking: Identification marking shall include both the U-93A/U and the M9177/1-1 numbers.

Mating connectors: M9177/3-1, M9177/4-1, and M9177/5-1.

Part number: M9177/1-1.

Supersession data: M9177/1-1 supersedes U-93A/U.

CONCLUDING MATERIAL

Review activities:
Air Force - 11, 99
DLA - ES

User activities:
Air Force - 17, 99

Preparing activity:
Air Force - 85

(Project 5935-F323-01)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:01Z
Check the source to verify that this is the current version before use.