MILITARY SPECIFICATION SHEET

CONNECTOR, AUDIO, AIRBORNE, PLUG, MINIATURE, 4 CONTACT

This specification sheet is approved for use by the Air Force Acquisition Logistics Division, Electronic Support Division (AFALD/PTES), Gentile Air Force Station, Dayton, Ohio 45444, Department of the Air Force, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the connector described herein shall consist of this document and the latest issue of Specification MIL-C-9177.


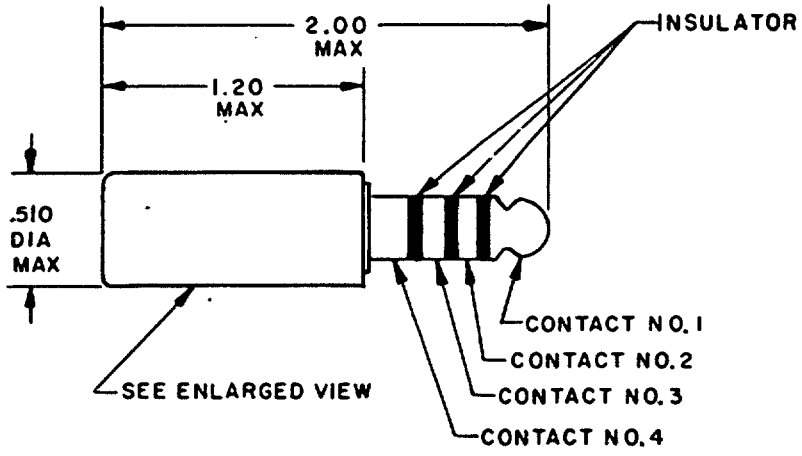


FIGURE 1. Dimensions and configurations.

Ⓐ denotes changes


FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:02Z
Check the source to verify that this is the current version before use.

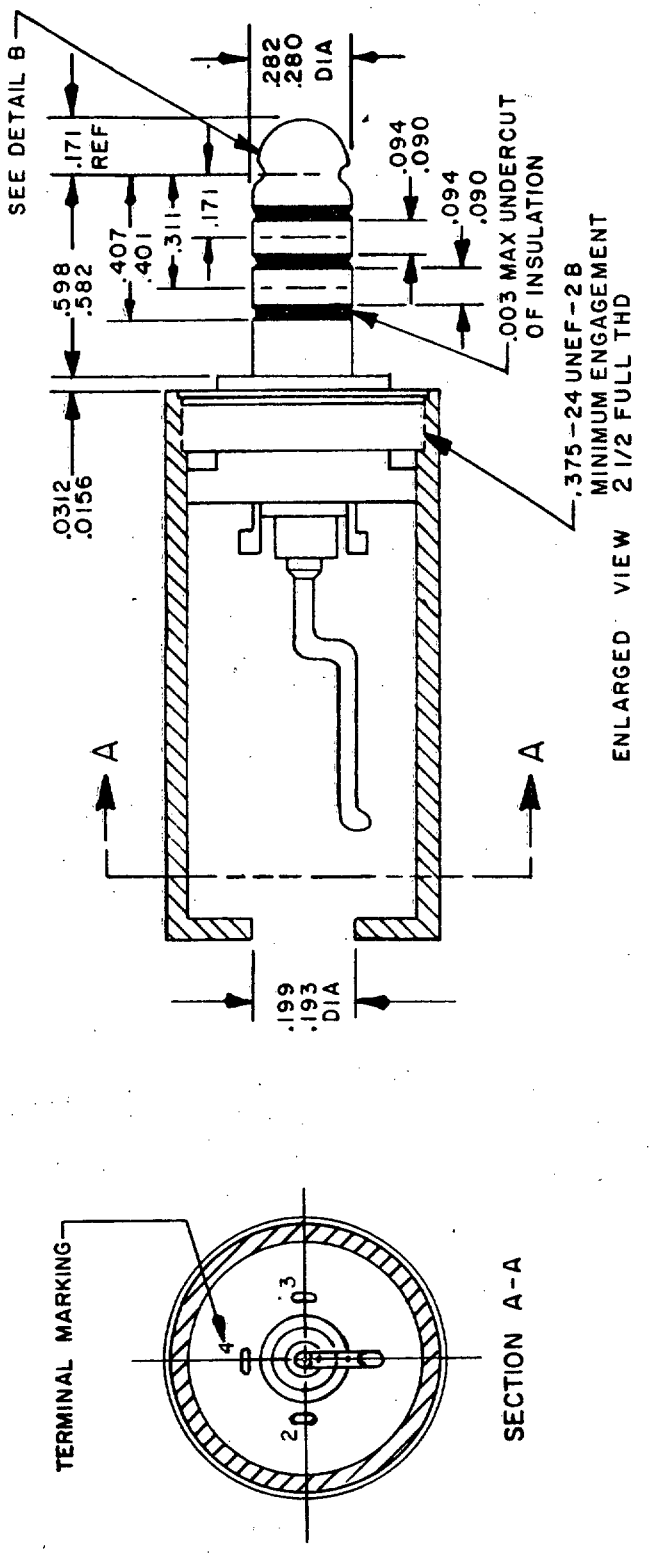

(A) FIGURE 1. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:02Z
Check the source to verify that this is the current version before use.

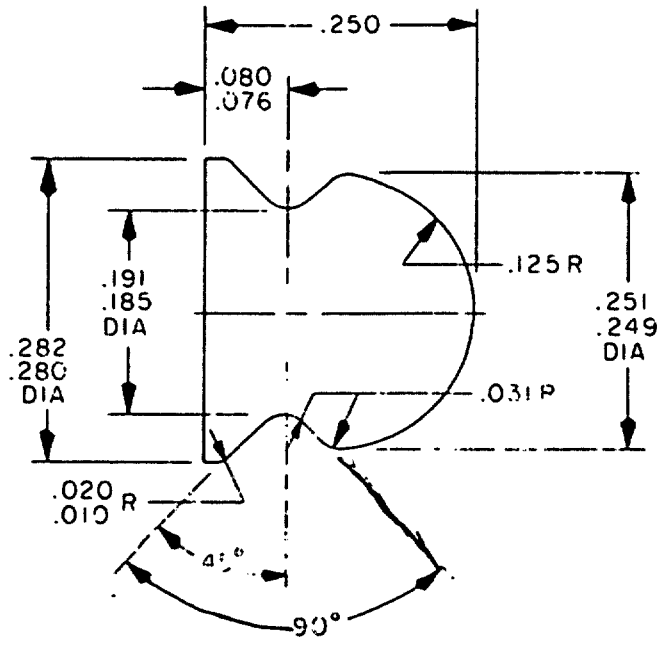

DETAIL B

INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM
.010	.25	.080	2.03	.250	6.35	.875	22.22
.0156	.396	.112	2.84	.251	6.38	.999	25.37
.020	.51	.125	3.18	.280	7.11	1.531	38.89
.031	.79	.185	4.70	.282	7.16	1.70	43.2
.0312	.792	.191	4.85	.312	7.92	1.719	43.66
.076	1.93	.249	6.32	.562	14.27	1.80	45.7

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Unless otherwise specified, tolerance is ±.005 (.13 mm).
4. All undimensioned pictorial representations are for reference purposes only.

FIGURE 1. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:02Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Torque: Torque test is applicable.

Controlled drop: Controlled drop test is applicable.

Stack assembly: Stack assembly test is applicable.

Static load: Static load test is applicable.

Insertion and withdrawal forces: The insertion and withdrawal forces shall be as specified:

Insertion force - - - - - 10 pounds (maximum).
Witndrawal force - - - - 6 pounds (minimum), 10 pounds (maximum).

Ⓐ Cable retention: Cable retention test is applicable. The test cable shall be CX4707C/A1C in accordance with USAF Drawing No. 60C12501 and MIL-C-83501. The force shall be 30-pounds minimum.

Specified mating connector: For testing, the specified mating connector shall be M9177/3-1.

Ⓐ Body and insulation: Polyvinylidene fluoride per MIL-P-46122, glass filled polycarbonates per MIL-P-81390, polycarbonate per L-P-393, and glass filled polystyrene per MIL-M-21347, and KEL-F are optional materials.

Shell: Optional material is Nylon Zytel ST801.

Marking: Identification marking shall include both the U-174A/U and the M9177/2-1 numbers.

Contact construction: Contact to terminal shall be one piece construction. Material shall be Monel per Federal specification QQ-N-281.

Solder lug terminals: The solder terminals for each contact shall be shaped and located so that terminals No. 2, No. 3, and No.4 will accept two 0.030-inch (0.76 mm) diameter wires, terminal No. 1 will accept one 0.030-inch (0.76 mm) diameter wire.

Mating connectors: M9177/3-1, M9177/4-1, and M9177/5-1.

Part number: M9177/2-1.

Supersession data: M9177/2-1 supersedes U-174A/U.

Custodian:
Air Force - 85

Review activities:
Air Force - 11, 99
DLA - ES

User activities:
Air Force - 17, 19

Preparing activity:
Air Force - 85

(Project 5935-F158-2)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:02Z
Check the source to verify that this is the current version before use.