MILITARY SPECIFICATION SHEET

CONNECTOR, AUDIO, AIRBORNE, JACK, CABLE, 4 CONTACT

This specification sheet is approved for use by the Department of the Air Force, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the connector described herein shall consist of this specification sheet and the latest issue of MIL-C-9177.

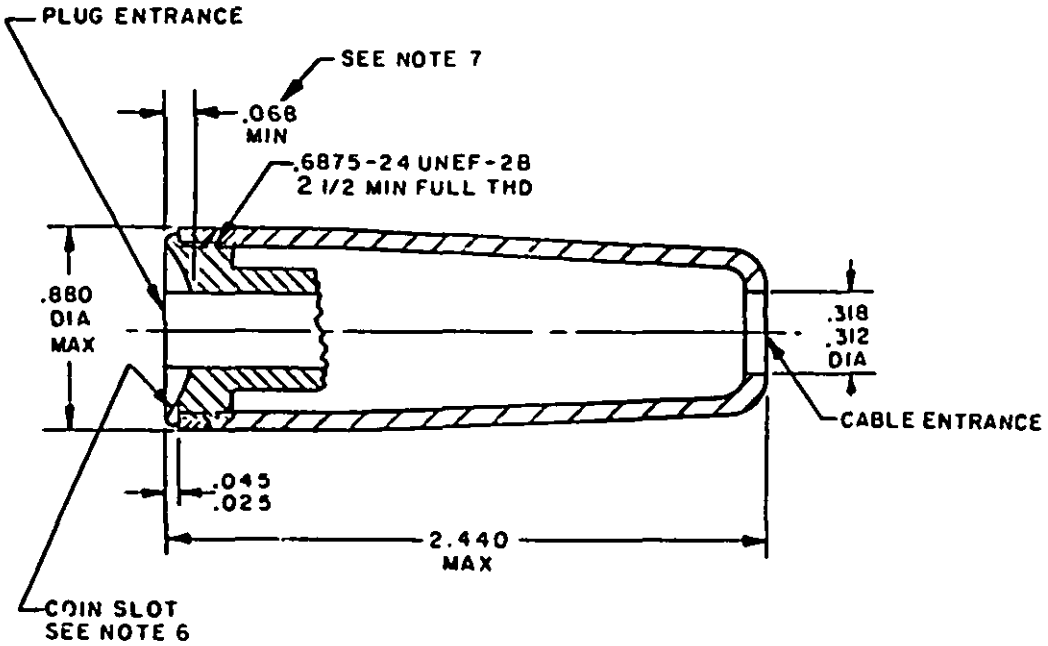


FIGURE 1. Dimensions and configurations.

Ⓑ denotes changes

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:02Z
Check the source to verify that this is the current version before use.


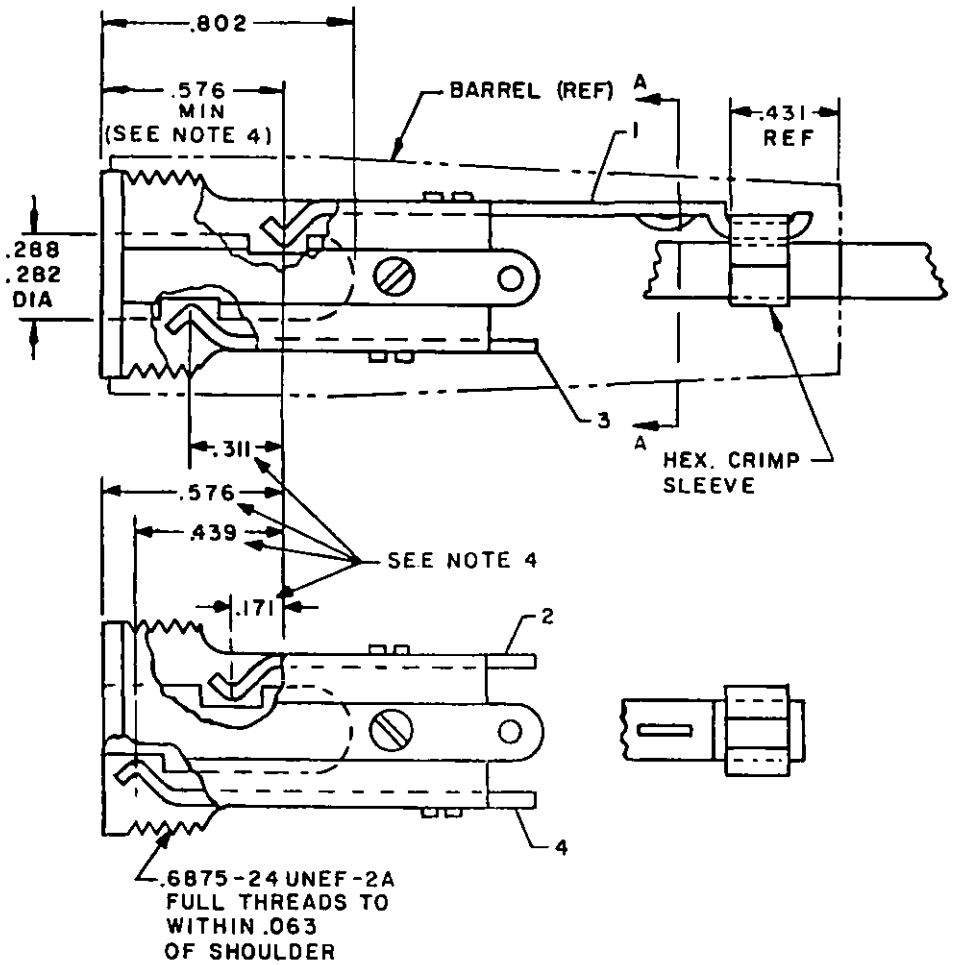


FIGURE 1. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:02Z
Check the source to verify that this is the current version before use.

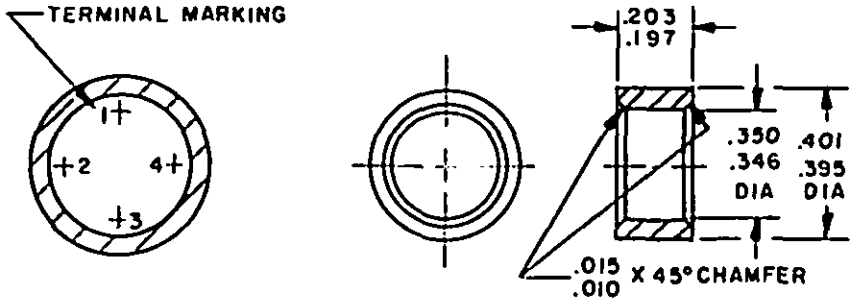

SECTION A-A

HEX CRIMP SLEEVE

INCHES	MM	INCHES	MM	INCHES	MM
.010	0.25	.203	5.16	.395	10.03
.015	0.38	.282	7.16	.401	10.19
.025	0.64	.288	7.32	.431	10.94
.045	1.14	.311	7.90	.439	11.15
.068	1.73	.312	7.92	.576	14.63
.171	4.34	.318	8.08	.802	20.37
.197	5.00	.346	8.79	.880	22.35
		.350	8.89	2.440	61.98

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ±.005 (0.13 mm).
4. If the jack passes the electrical continuity test using the test plug this will be accepted as evidence that the jack meets the contact location requirements.
5. All undimensioned pictorial configurations are for reference purposes only.
6. Coin slot width .073 (1.85 mm) minimum.
7. .068 (1.73 mm) is the minimum depth measured to the theoretical intersection of the arc with the horizontal centerline.

FIGURE 1. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:02Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Crimp sleeve: Crimp sleeve requirement is applicable.

Tool data: Use M22520/5-01 hand tool w/crimp die M22520/5-29, M22520/5-35, or M22520/5-55.

Static load: Static load test is applicable.

Insertion and withdrawal forces: The insertion and withdrawal forces shall be as specified:

(B)

Insertion force	13 pounds (maximum).
Withdrawal force	6 pounds (minimum), 10 pounds (maximum).
Insertion and withdrawal force after spring life	4.5 pounds (minimum).

Frame strength: Frame strength test is applicable.

Spring life: Spring life test is applicable.

Contact spring pressure: Contact spring pressure test is applicable.

Cable retention: Cable retention test is applicable. The test cable shall be WF-14/U. The force shall be 30-pounds minimum.

Marking: Identification marking shall include both the U-92A/U and the M9177/3-1 numbers.

Body and insulation: Polyvinylidene fluoride per MIL-P-46122; glass filled polycarbonates per MIL-P-81390; polycarbonate per L-P-393; and glass filled polystyrene per MIL-M-21347 are optional materials.

Shell: Optional material is Nylon Zytel ST801.

Specified mating connector: For testing, the specified mating connector shall be M9177/1-1.

Mating connectors: M9177/1-1 and M9177/2-1.

Part number: M9177/3-1.

Supersession data: M9177/3-1 supersedes U-92A/U.

Custodian:
Air Force - 85

Review activities:
Air Force - 11, 99
DLA - ES

User activities:
Air Force - 17, 19

Agent:
DLA - ES

Preparing activity:
Air Force - 85

(Project 5935-F243)

* U.S. GOVERNMENT PRINTING OFFICE: 1984—705—045/A2103

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:02Z
Check the source to verify that this is the current version before use.