
MIL-C-9177/4A(USAF)
30 April 1981
SUPERSEDING
MIL-C-9177/4(USAF)
24 April 1979

MILITARY SPECIFICATION SHEET


CONNECTOR, AUDIO, AIRBORNE, JACK, PANEL MOUNT, 4 CONTACT

This specification sheet is approved for use by the Air Force Acquisition Logistics Division, Electronic Support Division (AFALD/PTES), Gentile Air Force Station, Dayton, Ohio 45444, Department of the Air Force, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the connector described herein shall consist of this document and the latest issue of Specification MIL-C-9177.

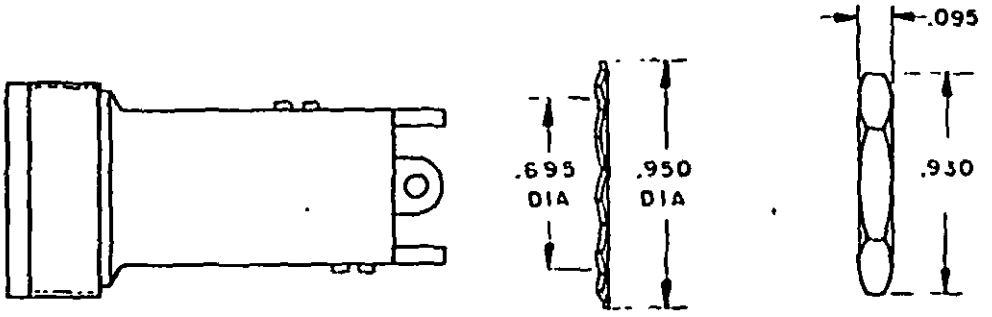


LOCKWASHER
INTERNAL TOOTH .031 THICK




RECOMMENDED MOUNTING HOLE


Ⓐ FIGURE 1. Dimensions and configurations.

Ⓐ denotes changes



FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:02Z
Check the source to verify that this is the current version before use.

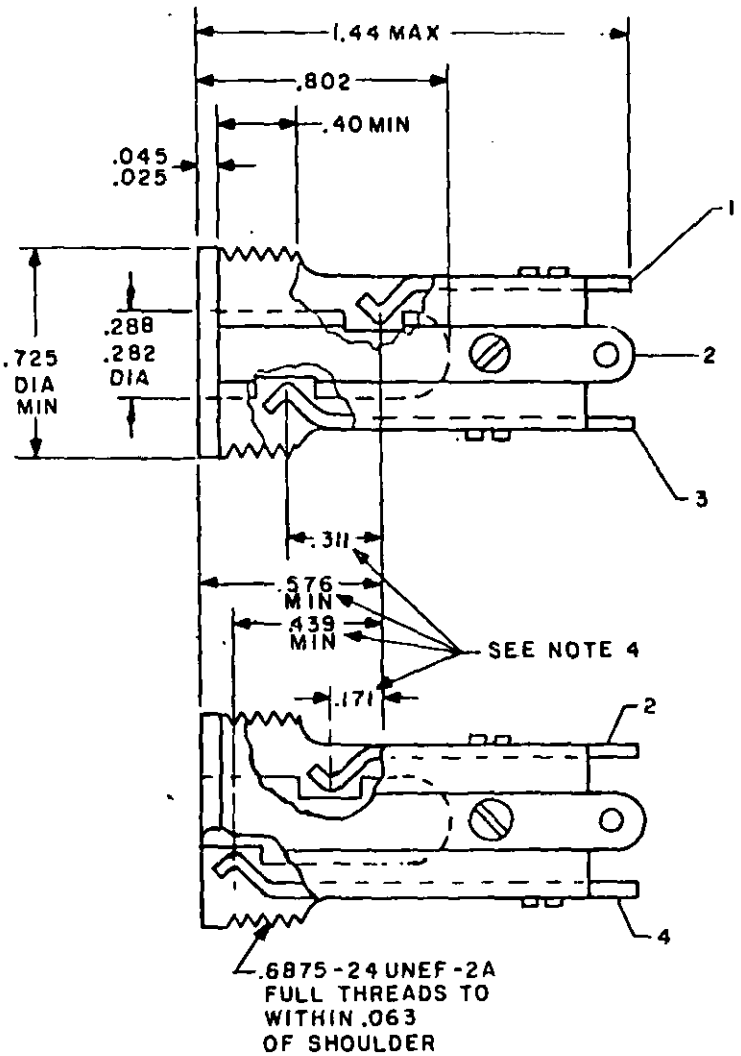


| INCHES | MM | INCHES | MM |
|---|---|---|---|
| .025 | .64 | .40 | 10.2 |
| .031 | .79 | .439 | 11.15 |
| .045 | 1.14 | .576 | 14.63 |
| .063 | 1.60 | .695 | 17.65 |
| .095 | 2.41 | .725 | 18.42 |
| .171 | 4.34 | .802 | 20.37 |
| .282 | 7.16 | .930 | 23.62 |
| .288 | 7.32 | .950 | 24.13 |
| .311 | 7.90 | 1.44 | 36.6 |

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Unless otherwise specified, tolerance is ±.005 (.13 mm).
4. If the jack passes the electrical continuity test using the test plug, this will be accepted as evidence that the jack meets the contact location requirements.
5. All undimensioned pictorial configurations are for reference purposes only.

(A) FIGURE 1. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:02Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Insertion and withdrawal forces: The insertion and withdrawal forces shall be as specified:

Insertion force - - - - - - 10 pounds (maximum).
Withdrawal force - - - - - 6 pounds (minimum), 10 pounds (maximum).
(A) Insertion and withdrawal force after spring life - - 4.5 pounds (minimum).

Spring life: Spring life test is applicable.

Contact spring pressure: Contact spring pressure test is applicable.

(A) Body and insulation: Polyvinylidene fluoride per MIL-P-46122; glass filled polycarbonates per MIL-P-81390; polycarbonate per L-P-393; and glass filled polystyrene per MIL-M-21347 are optional materials.

(A) Mounting panel thickness: For use on 0.1875 inch (4.76 mm) maximum panels.

Specified mating connector: For testing, the specified mating connector shall be M9177/1-1.

Mating connectors: M9177/1-1 and M9177/2-1.

Part number: M9177/4-1.

Custodian:
Air Force - 85

Review activities:
Air Force - 11, 99
DLA - ES

User activities:
Air Force - 17, 19

Preparing activity:
Air Force - 85

(Project 5935-F158-4)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:02Z
Check the source to verify that this is the current version before use.

# STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

*(See Instructions – Reverse Side)*

| 1. DOCUMENT NUMBER | 2. DOCUMENT TITLE |
|---|---|
| | |

| 3a. NAME OF SUBMITTING ORGANIZATION | 4. TYPE OF ORGANIZATION *(Mark one)* |
|---|---|
| | ☐ VENDOR |
| b. ADDRESS *(Street, City, State, ZIP Code)* | ☐ USER |
| | ☐ MANUFACTURER |
| | ☐ OTHER *(Specify)*: |

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

| 7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional | b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional |
|---|---|
| c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional | 8. DATE OF SUBMISSION *(YYMMDD)* |

*(TO DETACH THIS FORM, CUT ALONG THIS LINE.)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:02Z
Check the source to verify that this is the current version before use.