
MILITARY SPECIFICATION SHEET

DISCHARGER, ELECTROSTATIC, TRAILING EDGE, INTEGRAL BASE, LESS THAN 300 KNOTS

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the dischargers described herein shall consist of this specification and the latest issue of MIL-D-9129.

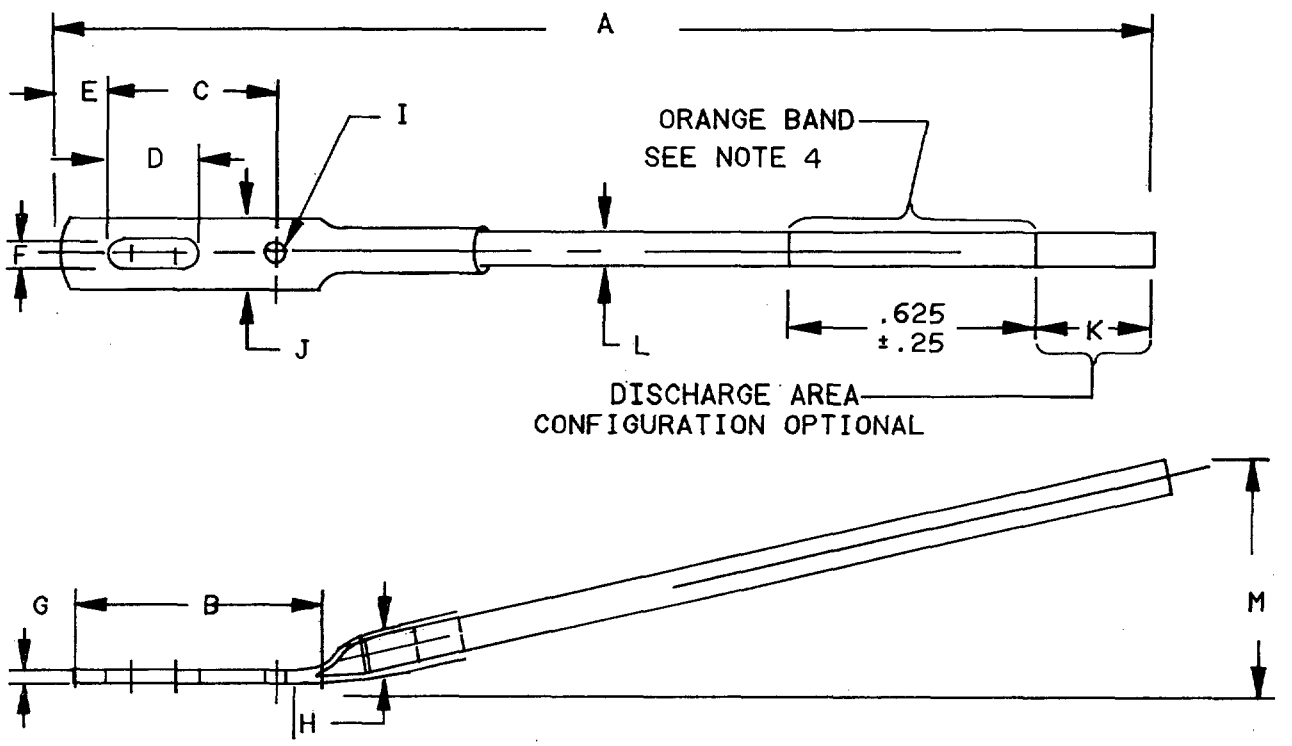


CONFIGURATION A


FIGURE 1. Dimensions and configurations.

AMSC N/A
FSC 5920

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.
Downloaded from https://assist.dla.mil -- Downloaded: 2026-10-17T11:59Z
Check the source to verify that this is the current version before use.

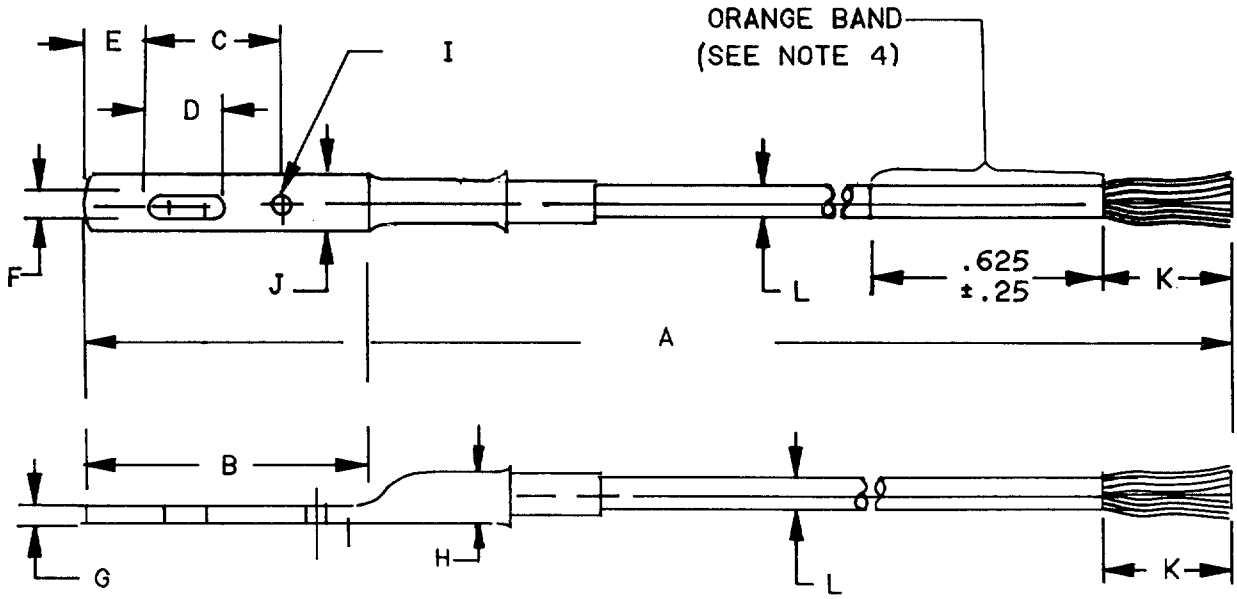

CONFIGURATION B

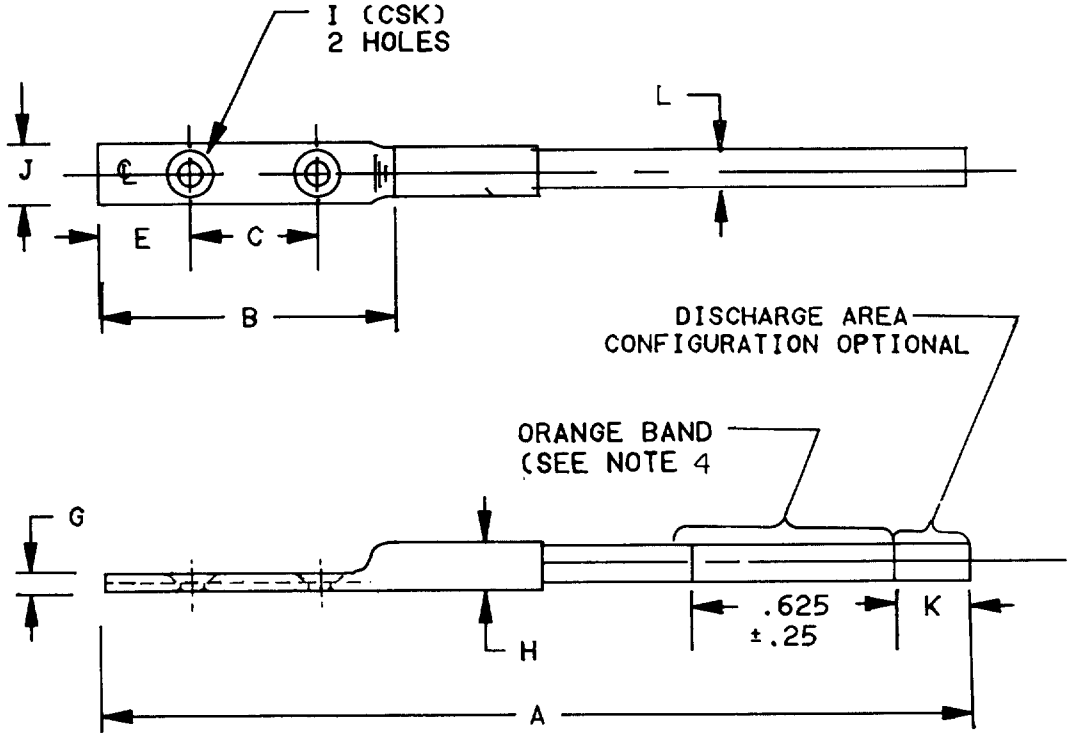

CONFIGURATION C

FIGURE 1. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:59Z
Check the source to verify that this is the current version before use.

Part number M9129/ 01- 1/	Overall length max A	Length to bend line max B	Hole location C	Length of slot D	Distance from end of bracket to start of slot E	Width of slot F	Thickness of swage area max G	Diameter of bracket max H	Diameter of hole I	Width of bracket max J	Length of discharge area max K	Diameter of shaft max L	Height on angle type dischargers max M	Config.
01--	10.75	3.62	1.59	.62	.22	.160	.150	.438	.189	.600	.563	.350	2.70	A
02--	13.50	4.50	1.59	.62	.22	.160	.200	.490	.189	.650	1.50	.280	--	B
03--	8.70	3.0	1.06	--	.50	--	.160	.39	.130 csk 100°	.530	.500	.270	--	C

1/ Part numbers shall include additional symbols to indicate magnetism and lightning survivability (See part number example).

Inches	mm	Inches	mm
.130	3.30	.530	13.46
.150	38.10	.563	14.30
.160	4.06	.600	15.24
.189	4.80	.62	15.8
.200	50.80	.650	16.51
.22	5.6	1.06	26.9
.25	6.4	1.59	40.4
.270	6.86	3.0	7.6
.280	7.11	3.62	92.0
.350	8.89	4.50	114.3
.39	9.9	8.70	221.0
.438	11.13	10.75	273.1
.490	12.45	13.50	342.9

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerances are ±.02 (0.51 mm) for two place decimals and ±.010 (0.25 mm) for three place decimals.
4. An international orange band, .625 ±.25 (15.88 ±6.4 mm) inches long, shall encircle diameter L to visually indicate the tip fail point dimensioned by K.

FIGURE 1. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:59Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and construction: See figure 1.

Weight (in grams): 40 grams maximum.

Rigidity: Nonrigid dischargers are described by configuration B.

Magnetism: Nonmagnetic dischargers shall be designated with "A", and magnetic dischargers shall be designated with "M".

Lightning survivability: Electrostatic dischargers with lightning survivability characteristics shall be designated "P", and dischargers without lightning survivability characteristics shall be designated "U".

Part number (example): M9129/01- 01 M U

Military designator and specification number

Physical dimensions (see figure 1)

Magnetism

Lightning survivability

Revision letters are not used to denote changes due to the extensiveness of the changes.

Custodians:
Army - ER
Navy - AS
Air Force - 85

Review activities:
Army - CE, MI
Air Force - 11, 17, 99

User activities:
Navy - MC
Air Force - 14, 19

Preparing activity:
Air Force - 85

Agent:
DLA - ES

(Project 5920-0409-1)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:59Z
Check the source to verify that this is the current version before use.