30 September 1986


Mil-D-9129/6
8 November 1967

MILITARY SPECIFICATION SHEET


DISCHARGER, ELECTROSTATIC, WING TIP,
NON-INTEGRAL BASE, LESS THAN 600 KNOTS

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the dischargers described herein shall consist of this specification and the latest issue of MIL-D-9129.

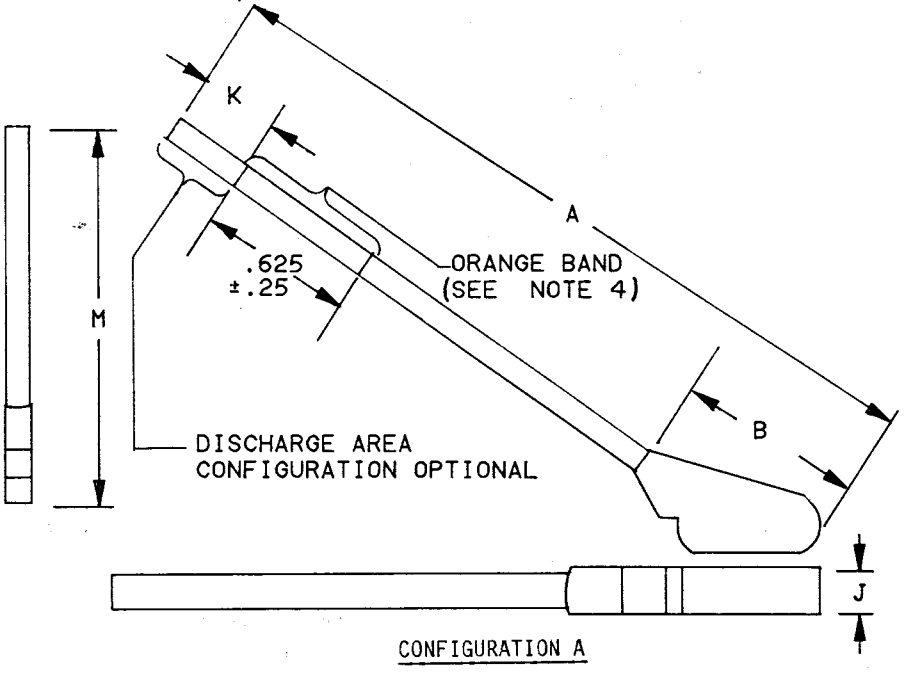


CONFIGURATION A

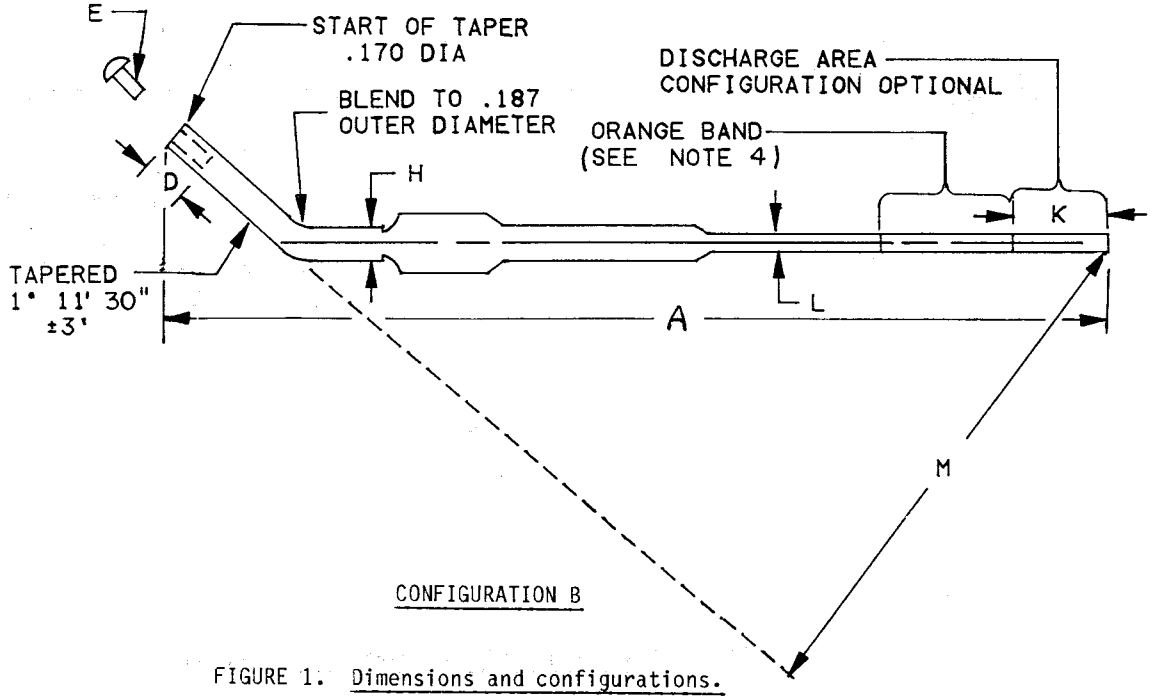


CONFIGURATION B

FIGURE 1. Dimensions and configurations.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.
Source: https://assist.dla.mil -- Downloaded: 2026-01-17 11:59Z
Check the source to verify that this is the current version before use.

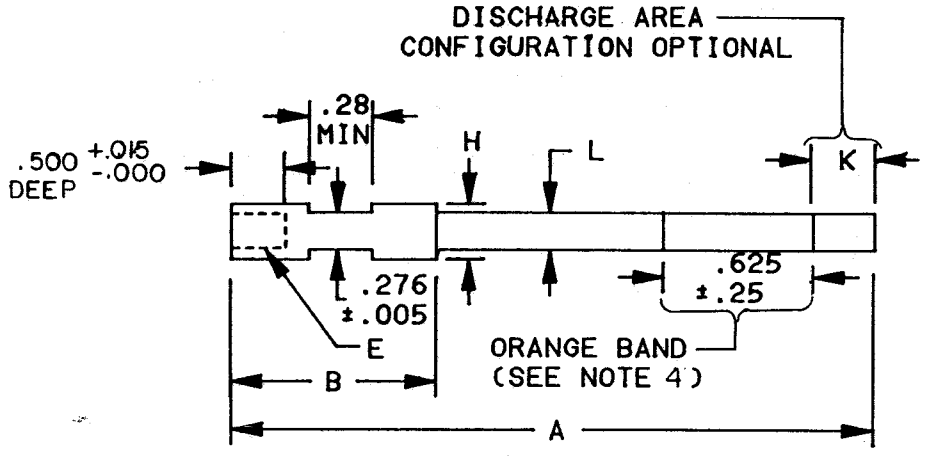

CONFIGURATION C

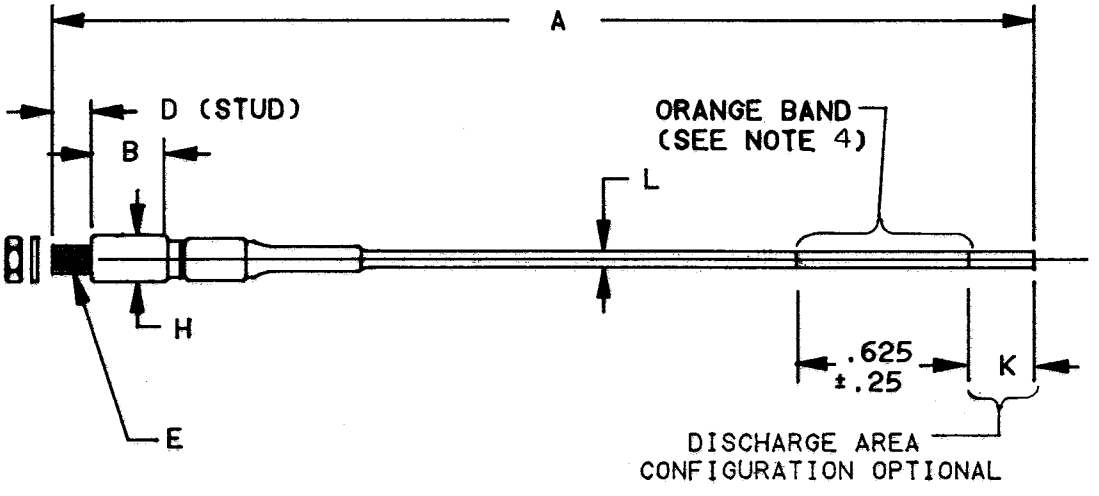

CONFIGURATION D

FIGURE 1. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:59Z
Check the source to verify that this is the current version before use.

Part number M9129/06- 2/	Overall length max A	Length of holder max B	Thread length min D	Thread size E	Dia. max H	Bracket width max J	Length of discharge area max K	Dia of body or sleeve max L	Height on angle type dischargers max M	Configuration	Holder 1/ figure from MIL-D-9129/9 see note 5
01--	5.10	1.70	-	-	-	.53	1.00	.42	3.20	A	10
02--	5.80	1.60	.50	see note 6	.28	-	.90	.28	2.70	B	2, 7, 8
03--	4.80	1.35	.45	.25-28	.35	-	.750	.28	-	C	9
04--	3.50	1.35	.31	.25-28	.35	-	.750	.28	-	D	N/A

1/ For applications requiring lightning survivability, only holders 7 and 10 shall be used with the appropriate P type discharger.
2/ Part numbers shall include additional symbols to indicate magnetism and lightning survivability (See part number example).

Inches	mm	Inches	mm	Inches	mm
.000	0.00	.35	8.9	1.60	40.6
.005	0.13	.42	10.7	1.70	43.2
.015	0.38	.500	12.70	2.70	68.6
.170	4.32	.53	13.5	3.20	81.3
.187	4.75	.625	15.88	3.50	88.9
.25	6.4	.750	19.05	4.80	121.9
.276	7.01	.90	22.9	5.10	129.5
.28	7.1	1.00	25.40	5.80	147.3

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerances are ±.02 (0.51 mm) for two place decimals and ±.010 (0.25 mm) for three place decimals.
4. An international orange band, .625 ±.25 (15.88 ±6.4 mm) inches long, shall encircle diameter L to visually indicate the tip fail point dimensioned by K.
5. Dischargers must interface with holder shown in this column.
6. Screw supplied must interface with its mating discharger, therefore screw thread length and screw thread size are optional.

FIGURE 1. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:59Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and construction: See figure 1.

Weight (in grams): 20 grams maximum.

Magnetism: Nonmagnetic dischargers shall be designated with "A", and magnetic dischargers shall be designated with "M".

Lightning survivability: Electrostatic dischargers with lightning survivability characteristics shall be designated "P", and dischargers without lightning survivability characteristics shall be designated "U".

Part number (example): M9129/06-01MP

- M9129/06- — Military designator and specification number
- 01 — Physical dimensions (see figure 1)
- M — Magnetism
- P — Lightning survivability

Revision letters are not used to denote changes due to the extensiveness of the changes.

Custodians:
Army - ER
Navy - AS
Air Force - 85

Review activities:
Army - CE, MI
Air Force - 11, 17, 99

User activities:
Navy - MC
Air Force - 14, 19

Preparing activity:
Air Force - 85

Agent:
DLA - ES

(Project 5920-0409-6)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:59Z
Check the source to verify that this is the current version before use.