MILITARY SPECIFICATION

REGULATOR, OXYGEN, HIGH PRESSURE, TYPE MA-1

* Inactive for new design after 28 June 1985 . This document is in support of the MB-1 Oxygen recharging trailer. It should not be specified in any new ground support equipment specifications. Cancellation is anticipated before the end of 1994.

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

* 1.1 Scope. This specification covers the general requirements for one type of high pressure oxygen regulator, designated type MA-1.

* 2. APPLICABLE DOCUMENTS

* 2.1 Government documents.

* 2.1.1 Specifications, standards, and handbooks. Unless otherwise specified, the following specifications, standards, and handbooks of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation form a part of this specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

GG-G-76	Gage, Pressure and Vacuum, Dial Indicating (For Air, Steam, Oil, Water, Ammonia, Chloro-fluoro Hydrocarbon Gases, and Compressed Gases)
O-T-236	Tetrachloroethylene (Perchloroethylene) Technical Grade
BB-N-411	Nitrogen, Technical
QQ-P-416	Plating, Cadmium (Electrodeposited)
PPP-B-601	Boxes, Wood, Cleated-Plywood
O-T-634	Trichloroethylene, Technical
PPP-B-636	Box, Shipping, Fiberboard
QQ-S-781	Strapping, Steel, and Seals
PPP-C-795	Cushioning Material, Flexible, Cellular, Plastic Film for Packaging Applications
BB-A-1034	Air, Compressed, for Breathing Purposes

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: the Engineering Division, San Antonio ALC/MMEDO, Kelly AFB, TX 78241 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

"DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited."

Source: https://assist.dla.mil -- Downloaded: 202640-17T12:03Z
Check the source to verify that this is the current version before use.

PPP-C-1752	Cushioning Material, Packaging Unicellular Polyethylene Foam, Flexible
PPP-C-1797	Cushioning Material, Resilient, Low Density, Uncellular, Polypropylene Foam
PPP-C-1842	Cushioning, Material, Plastic, Open Cell (For Packaging Applications)

MILITARY

MIL-P-116	Preservation, Methods of
MIL-B-121	Barrier Material, Greaseproofed, Waterproofed, Flexible
DOD-D-1000	Drawings, Engineering and Associated Lists
MIL-S-4043	Steel, Corrosion-Resisting (Extra Low Carbon Type 304) Plate, Sheet, and Strip
MIL-C-5541	Chemical Conversion Coatings on Aluminum Alloys
MIL-P-7105	Pipe Threads, Taper, Aeronautical National Form, Symbol ANPT, General Requirements for
MIL-A-8625	Anodic-Coatings, for Aluminum and Aluminum Alloys
MIL-S-8879	Screw Threads, Controlled Radius Root With Increased Minor Diameter; General Specification for
MIL-O-27210	Oxygen, Aviator S Breathing, Liquid and Gas
MIL-C-81302	Cleaning Compound, Solvent, Trichlorotrifluoroethane

STANDARDS

MILITARY

MIL-STD-105	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	Marking for Shipment and Storage
MIL-STD-130	Identification Marking of U.S. Military Property
MIL-STD-143	Standards and Specifications, Order of Precedence for
MIL-STD-147	Palletized Unit Loads
MIL-STD-794	Part and Equipment, Procedures for Packaging and Packing Of
MIL-STD-810	Environmental Test Methods
MIL-STD-899	Dissimilar Metals
MIL-STD-1359	Cleaning Methods and Procedures for Breathing Oxygen Equipment

* (Copies of specifications, standards, handbooks, drawings, and publications required by manufacturers in connection with specific aquisition functions should be obtained from the contracting activity or as directed by the contracting officer.)

* 2.2 Other publications. The following document(s) form a part of this specification to the extent specified herein. The issues of the documents which are indicated as DoD adopted shall be the issue listed in the current DoDISS and the supplement thereto, if applicable.

AMERICAN TESTING for TESTING and MATERIALS (ASTM)

ASTM-D-3951 Packaging, Commercial

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:03Z
Check the source to verify that this is the current version before use.

(Application for copies of ASTM publications should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103).

* 2.3 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein, the text of this specification shall take precedence.

3. REQUIREMENTS

3.1 Qualification. Regulators furnished under this specification shall be products which are qualified for listing on the applicable qualified products list at the time set for opening of bids (see 4.1 and 6.3).

3.2 Materials. Material shall be as specified herein. Material not definitely specified shall be of a good commercial quality entirely suitable for the purpose. Material shall be free from all defects and imperfections that might affect the serviceability of the finished product. Dissimilar metals as defined by MIL-STD-889 shall not be placed in contact with each other unless the adjoining surfaces are suitably coated to preclude any corrosive action.

3.2.1 Nonmetallic materials. Any nonmetallic material that is easily deteriorated or otherwise easily affected adversely by continued use with oxygen shall not be used.

3.2.2 Nonferrous materials. Nonferrous materials shall be used for all parts of the regulator, except where ferrous materials are essential. Where ferrous materials are essential, corrosion-resisting steel conforming to type 304 of MIL-S-4043, or an equivalent grade, which is noncorrosive upon exposure to oxygen, shall be used.

3.2.3 Protective treatment. When materials are used in the construction of the regulator that are subject to deterioration when exposed to climatic and environmental conditions likely to occur during service usage, they shall be protected against such deterioration in a manner that will in no way prevent compliance with the performance requirements of this specification. The use of any protective coating that will crack, chip, or scale with age or extremes of climatic and environmental conditions shall be avoided.

3.2.4 Selection of materials. Specifications and standards for all materials, parts, and Government certification and approval of processes and equipment, which are not specifically designated herein and which are necessary for the execution of this specification, shall be selected in accordance with MIL-STD-143, except as provided in the following paragraph.

3.2.4.1 Standard parts. Standard parts (MS or AN) shall be used wherever they are suitable for the purpose, and shall be identified on the drawing by their part numbers. Commercial utility parts such as screws, bolts, nuts, cotter pins, et cetera, may be used, provided they possess suitable properties and are replaceable by the standard parts (MS or AN) without alteration, and provided the corresponding standard part numbers are referenced in the parts list and, if practicable, on the contractor's drawings. In the event there is no suitable corresponding standard part in effect on date of invitation for bids, commercial parts may be used provided they conform to all requirements of this specification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:03Z
Check the source to verify that this is the current version before use.

3.3 Design and construction. The regulator shall be so designed and constructed that no parts will work loose in service. It shall be built to withstand the strains, jars, vibrations, and other conditions incident to shipping, installation, and service.

* 3.3.1 Wrenching flats. Wrenching flats shall be provided for use in attaching inlet and outlet fittings. The flats must be at least .3 inches long and .4 inches wide. They should be located within 1/2 inch of inlet or outlet.

* 3.3.2 Oxygen service requirements. The regulator shall be clean, dry, and free from any oil, grease, and other foreign matter; it shall contain no materials which will ignite when brought into direct contact with oxygen under high pressure. All openings shall be closed with noncorrosive and nonshredding caps or plugs.

* 3.3.3 Basic function. The regulator shall be designed and constructed to reduce pressure from an initial oxygen source at pressure up to 2,500 pounds per square inch gage to any delivery pressure between 1,000 and 2,000 pounds per square inch gage. The pressure-adjustment control shall consist of a thread screw provided with a suitable handle. The final delivery pressure shall not vary more than 3 percent from the preset value.

3.3.4 Oxygen inlet screen. A suitable filter, equivalent to a 200-mesh screen, shall be provided in the inlet connection to prevent foreign particles from entering the regulator, and shall be readily removable for inspection and cleaning purposes.

* 3.3.5 Pressure gages. The regulator shall be provided with two 2-1/2 inch pressure gages conforming to GG-G-76, Type A, except pressure scale. One shall indicate inlet pressures from 0 to 3,000 pounds per square inch, and the other shall indicate delivery pressure from 0 to 3,000 pounds per square inch. The dial of each gage shall be conspicously marked: "OXYGEN - USE NO OIL." Gages shall be Underwriter Laboratory approved.

3.3.6 Safety relief valve. A reseating type safety relief valve shall be provided in the delivery side of the regulator to prevent excessive buildup of pressure in the outlet. The safety valve shall be present and sealed to prevent alteration of venting pressure. Venting of the safety valve shall start at a delivery pressure of not less than 1,900 pounds per square inch gage and shall reach a rate of not less than 25 cubic feet per minute free oxygen before the delivery pressure exceeds 2,100 pounds per square inch gage. The safety valve shall reseal after venting as soon as pressure is shut off.

* 3.3.7 Mounting position. The regulator specified herein shall operate satisfactorily in any position in which it is mounted.

* 3.3.8 Flow capacity. The regulator shall be capable of a minimum delivery rate of 75 cubic feet per minute of free gas with any combination of inlet and outlet pressures within the design limits, and having a minimum pressure differential of 500 pounds per square inch.

* 3.3.9 Inlet and outlet markings. The inlet and outlet of the regulator shall be marked in raised letters as shown on Figure 1.

Source: https://assist.dla.mil -- Downloaded: 202610-17T12:03Z
Check the source to verify that this is the current version before use.

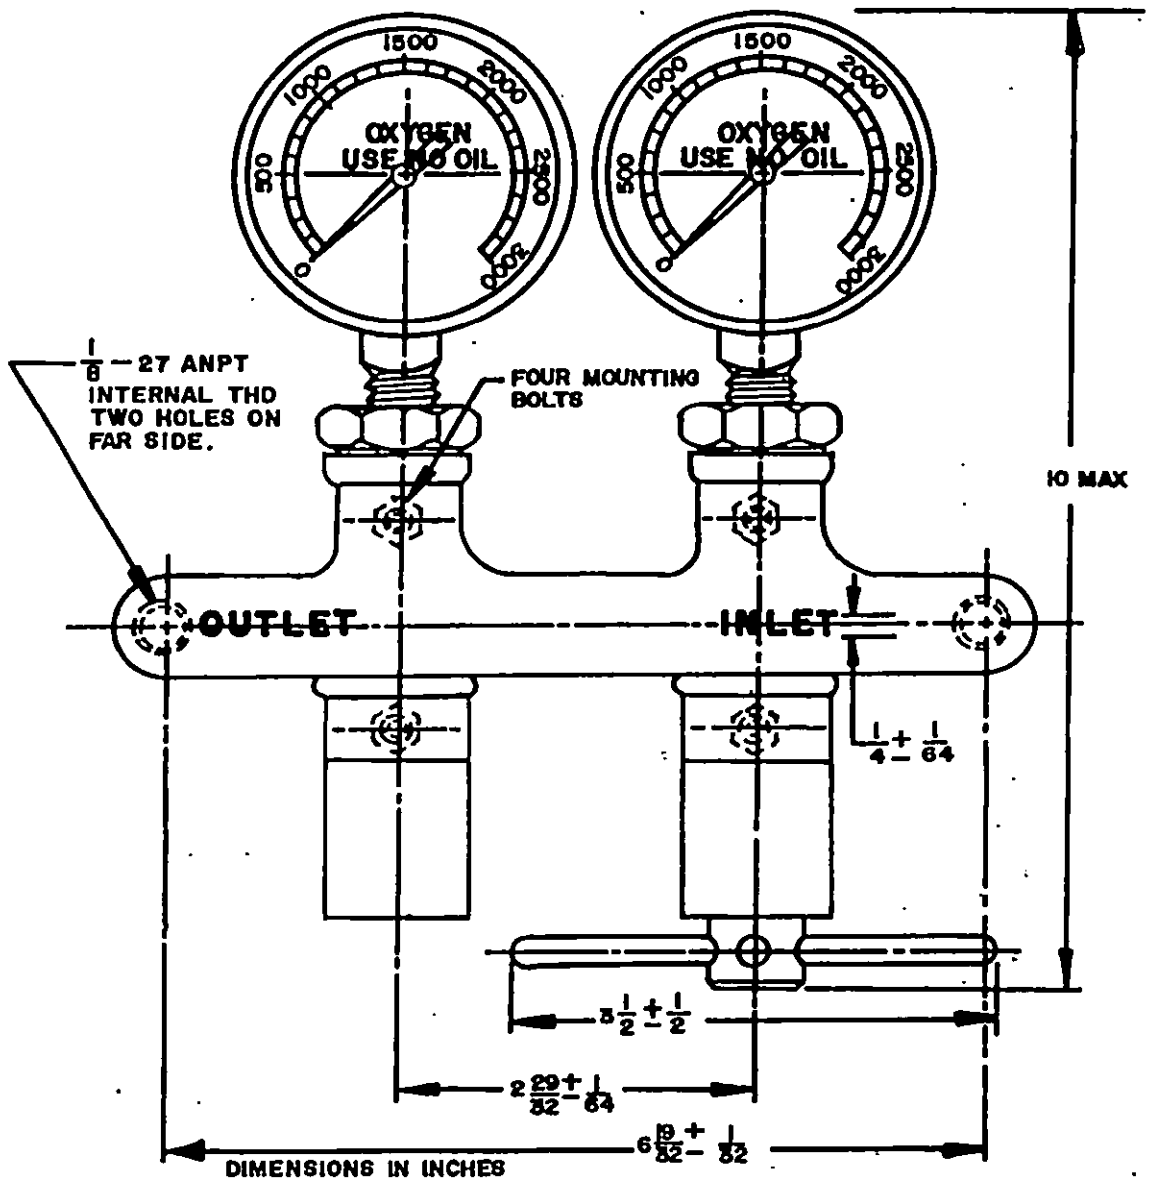


FIGURE I. Front view.

NOTE: Adjustment handle may optionally face in the same direction as gage faces.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:03Z
Check the source to verify that this is the current version before use.

* 3.4 Interchangeability. All parts having the same manufacturer's part number shall be directly and completely interchangeable with each other with respect to installation and performance. Changes in manufacturer's part numbers shall be governed by the drawing number requirements of DOD-D-1000.

3.5 Threads.

3.5.1 Screw. Unless otherwise specified, all machine screw threads shall conform to MIL-S-8879.

3.5.2 Pipe. Pipe threads shall conform to MIL-P-7105.

3.6 Dimension. The over-all dimensions shall conform to Figures 1 and 2. The relative positions of the inlet and outlet connections, and the mounting provisions, shall be as follows: The inlet and outlet connections shall be in a horizontal plane coincident with the centerline of the flow connection between the two units of the regulator. The openings shall be to the rear of the regulator.

3.6.1 Mounting bolt holes. Four mounting bolts and holes shall be furnished in accordance with Figures 1 and 2. The bolt lengths and tapped-hole depth shall be such that the regulator may be mounted on panels from 1/8 to 1/2 inch in thickness. There shall be a 3/8 inch minimum possible bolt thread engagement.

3.7 Weight. The weight of the regulator shall not exceed 10 pounds.

3.8 Finishes and protective coatings.

3.8.1 Aluminum-alloy parts. Aluminum-alloy parts shall be covered with an anodic film conforming to MIL-A-8625, except as follows:

* 3.8.1.1 Exceptions to anodization requirement. Dials, small holes, and case inserts need not be anodized.

* 3.8.1.2 Chemical film option. Aluminum alloys which do not anodize satisfactorily shall be coated with a chemical film in accordance with MIL-C-5541.


* 3.8.1.3 Paint base. Where the primary purpose of the treatment is to afford a suitable paint base, chemical treatment in accordance with MIL-C-5541 may be used in lieu of anodizing.

* 3.8.1.4 Nonaluminum parts. Castings containing nonaluminum-alloy integral inserts may be treated with a chemical film in accordance with MIL-C-5541 in lieu of anodizing.

* 3.8.1.5 Abrasion resistance. When abrasion resistance is a factor, chemical films in accordance with MIL-C-5541 shall not be used in lieu of anodizing.

3.8.2 Cadmium plating. Cadmium plating shall in accordance with QQ-P-416, type II or III, as applicable, and of a class that is adequate to achieve the degree of protection required.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:03Z
Check the source to verify that this is the current version before use.

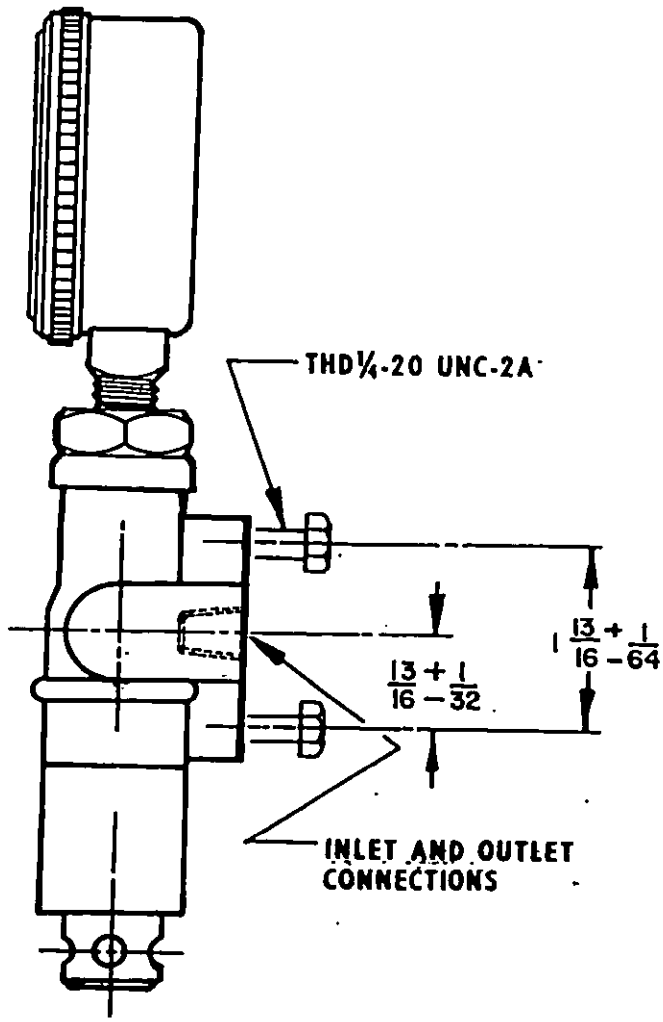

DIMENSIONS IN INCHES

FIGURE 2. Side view.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:03Z
Check the source to verify that this is the current version before use.

* 3.9 Performance. The regulator shall be capable of operating under the following conditions:

a. The regulator shall not sustain hum or vibration within its operating range of pressure and flow.

b. Temperature: The regulator shall be capable of operating as specified herein within the temperature range of -54° to +71° Centigrade (C).

c. Sand and dust. Exposure to airborne sand and dust particles encountered in normal and desert operation.

d. Freezing rain: Exposure to rain at freezing or below freezing temperatures.

e. Vibration. The regulator shall be capable of withstanding vibration having a double amplitude of 1.0 inch between the frequencies of 2 Hertz (Hz) and 5.5 Hz and an acceleration of 1.5g between the frequencies of 5.5 Hz and 200 Hz at a continously varying frequency between these limits (2 Hz to 200 Hz).

f. Reliability. The regulator shall be capable of being cycled a minimum of 500 times from 0- and 1,500 pounds per square inch gage to 0 on the outlet when the inlet of the regulator is connected to a pressure of 2,300 ±200 pounds per square inch gage.

3.10 Identification of product. Equipment, assemblies, and parts shall be marked for identification in accordance with MIL-STD-130.

3.10.1 Use of AN or MIL designations. AN or MIL designations shall not be applied to a product, except for qualification test samples, nor referred to in correspondence, until notice of approval has been received from the activity responsible for qualification.

3.11 Workmanship.

3.11.1 General. The regulator, including all parts and accessories, shall be fabricated and finished in a thoroughly workmanlike manner. Particular attention shall be given to freedom from blemishes, defects, sharp edges, and accuracy of dimensions. Workmanship shall be in accordance with high-grade commercial practice covering this type of equipment.

3.11.2 Cleaning. Prior to assembling the regulator, all internal surfaces shall be degreased by flushing with a cleaning compound, MIL-C-81302, or using a vapor degreaser in accordance with O-T-236 or O-T-634. Components shall be cleaned by immersing, scrubbing or pressure spray with MIL-C-81302 cleaning compound or ultrasonics may be used in conjunction with a vapor degreaser or MIL-C-81302 cleaning compound. After completion of the cleaning and when assembled, General Electric Type H Leak Detector or equivalent Halide testing apparatus shall be used to determine the absence of the cleaning solvents. The cleaning and cleanliness shall be in accordance with paragraphs 5.6, 6.1, 6.3 and 6.7 of MIL-STD-1359.

4. QUALITY ASSURANCE PROVISIONS

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:03Z
Check the source to verify that this is the current version before use.

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Classification of tests. The inspection of regulators shall be classified as follows:

a. Qualification tests.

b. Acceptance tests.

4.3 Test conditions. Whenever the pressure and temperature existing at the time of the test are not specified definitely, it is understood that the test is to be made at atmospheric pressure (approximately 29.92 inches Mercury and at room temperature (approximately 25°C). When tests are made with atmospheric pressure or room temperature differing materially from the above values, proper allowance shall be made for the difference from the specified condition. The gas to be used to conduct the qualification tests shall be oxygen in accordance with MIL-O-27210, Type I. The gas to be used for acceptance tests shall conform to one of the following:

Oxygen MIL-O-27210, Type I
Nitrogen BB-N-411, Type I, Class I, Grade B
Air BB-A-1034, Grade A or C

4.4 Qualification tests.

4.4.1 Qualification testing. Qualification testing shall be successfully accomplished on three regulators. The regulators shall be identified as required and forwarded to the activity responsible for qualification designated in the letter of authorization from that activity. (See 6.3)

4.4.2 Tests. The qualification tests of regulators shall consist of the acceptance tests and, in addition, the following tests.

4.4.2.1 Low temperature. The regulator shall be subjected to a temperature of -54°C for 3 hours. After the 3-hour period and while still at the specified temperature, the regulator shall be subjected to the tests specified in 4.5.1.3 and 4.5.1.4.

4.4.2.2 High temperature. The regulator shall be connected to an inlet pressure of at least 2,300 pounds per square inch gage, and shall be subjected to a temperature of +71°C for a period of 7 hours. After the 7-hour period, the regulator shall be brought to room temperature and subjected to the tests specified in 4.5.1.3 and 4.5.1.4.

4.4.2.3 Vibration. The regulator shall be subjected to the test prescribed by MIL-STD-810, Method 514.2, paragraph 4.6.9, referencing curve V of Figure 514.2-6 between the frequency limits of 2 to 200 Hz.

Source: https://assist.dla.mil -- Downloaded: 202610-17T12:03Z
Check the source to verify that this is the currentversion before use.

4.4.2.4 Reliability. With the regulator connected to an inlet pressure of 2,300 pounds per square inch gage, the regulator shall be cycled from 0 to 1,500 pounds per square inch gage and back to 0 (one cycle) on the outlet gage for a minimum 500 cycles. During this time no leakage or valve or gage malfunction shall be noted. The regulator shall then be subjected to the tests specified in 4.5.1.3 and 4.5.1.4.

* 4.4.2.5 Freezing rain. The regulator, with gages attached and inlet and outlet openings tightly closed, shall be subjected to a rain test at freezing temperatures (equivalent to an outdoor freezing rain), or a rain test followed by chilling to below freezing before the unit can dry appreciably. While still below freezing temperatures, the regulator shall be subjected to the tests specified in 4.5.1.3 and 4.5.1.4.

4.5 Acceptance tests. Acceptance tests shall consist of individual tests and sampling tests.

4.5.1 Individual tests. Each regulator shall be subjected to the following tests.

4.5.1.1 Examination of product. Each regulator shall be inspected to determine compliance with the requirements specified herein with respect to material, workmanship, marking and cleanliness. Cleaning and cleanliness shall meet the requirements of 5.6, 6.1, 6.3, and 6.7 of MIL-STD-1359.

* 4.5.1.2 Visual inspection. The regulator shall be inspected to determine its suitability for being mounted solidly on a panel such as is used on oxygen servicing carts, and shall be given a visual inspection for defects and incorporation of necessary fittings.

4.5.1.3 Leakage tests. Oxygen at a pressure of 2,300 - 200 pounds per square inch gage shall be applied to the inlet of the regulator, and the regulator outlet tested for leakage. The leakage shall not exceed 0.02 liter per minute. The pressure-adjusting screw shall be released in this test. With the same inlet pressure the regulator outlet connection shall be blocked off, and the pressure-adjusting screw adjusted to an indicated delivery pressure of 1000 pounds per square inch gage. All joints of the regulator shall be tested for leakage. There shall be no evidence of leakage during this test.

* 4.5.1.4 Flow test. With an inlet pressure of 1,500 pounds per square inch and a delivery pressure of 1,000 pounds per square inch gage, the flow rate shall be at least 75 cubic feet per minute for a period of 3 minutes. The delivery pressure shall not vary from 1,000 pounds per square inch gage by more than 30 pounds per square inch gage.

4.5.2 Sampling tests. Regulators shall be tested from each lot by random selection in accordance with MIL-STD-105, Inspection Level II and AQL of 1.0 percent.

* 4.5.2.1 Regulator safety relief valve vent test. With an oxygen inlet pressure of 2,300 ±100 pounds per square inch gage applied to the inlet and the outlet connection valved to permit a small bleed flow, the pressure adjustment handle shall be operated to slowly raise the delivery pressure until the

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:03Z
Check the source to verify that this is the current version before use.

safety relief valve starts to vent. The pressure adjustment handle shall be operated until the safety relief valve flow rate reaches 25 cubic feet per minute. The pressure adjustment handle shall then be operated to slowly reduce the delivery pressure until the relief valve completely reseals. This procedure shall be accomplished not less than two times. The relief valve shall start to vent at a pressure of not less than 1,900 pounds per square inch gage nor more than 2,000 pounds per square inch gage, the 25 cubic feet per minute flow rate shall be reached before the delivery pressure reaches 2,100 pounds per square inch gage and reseating shall occur when the gas supply to regulator inlet is shut off.

4.5.3 Rejection and retest.

* 4.5.3.1 Rework. Regulators which have been rejected may be reworked or have parts replaced to correct the defects, and resubmitted for acceptance. However, final acceptance of the items on hand and subsequent production is contingent upon the Inspector's decision regarding the over-all conformance of the product to specification requirements. When corrective action has been accomplished, all necessary tests shall be repeated. If investigation indicates that the defects may exist in items previously accepted, full particulars concerning the defects, including recommendations for correction, will be furnished to the contracting officer.

* 4.5.3.2 Sampling tests. When sampling tests are specified on a number of items that are selected from a production run and one or more of this number fails to meet the specified tests, acceptance of all items still on hand and subsequent production will be withheld until the extent and cause of failure is determined. For operational reasons, individual tests may be continued pending investigation of a sampling test failure.

* 4.6 Parts destroyed in testing. All parts, specimens, or assemblies destroyed in making tests required by this specification, to determine compliance with the specification, shall be in addition to the quantity specified in the contract or purchase order and shall be furnished without increasing the cost of the contract or order.

4.7 Inspection of the preservation, packaging, packing and marking for shipment and storage. Sample items or packs and the inspection of the preservation, packaging, packing and marking for shipment and storage shall be in accordance with the requirements of Section 5, or the documents specified therein.

5. Packaging.

5.1 Preservation and packaging. Preservation and packaging shall be Level A (see 6.2).

5.1.1 Level A.

5.1.1.2 Cleaning. Regulators shall be cleaned for oxygen service as specified in 3.3.2.

5.1.1.3 Unit Packaging. Each regulator shall be unit packaged in accordance with Method IC-2 of MIL-P-116 (use no preservatives, use MIL-B-121, Grade A,

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:03Z
Check the source to verify that this is the current version before use.

as the preliminary wrap and cushion the item with materials conforming to PPP-C-795, PPP-C-1842, PPP-C-1797 or PPP-C-1752 as required to protect from damage) then place item in a snug fitting container conforming to PPP-B-636, class weather-resistant, Grade W6C.

5.2 Packing. Packing shall be Level A, B, C or commercial, as specified (see 6.2).

5.2.1 Level A. The packaged regulators shall be packed in containers conforming to PPP-B-601 overseas type, Grade B, style optional. Closure and strapping shall be in accordance with applicable container specifications except the strapping shall conform to QQ-S-781, type I or IV, finish A.

5.2.2 Level B. The packaged regulators shall be packed in fiberboard containers conforming to PPP-B-636, class weather-resistant, Grade 3C, style optional. Gross weight of the fiberboard shipping container shall not exceed 70 pounds.

5.2.3 Level C. The Level C packing for regulators shall conform to the MIL-STD-794 requirements for this level.

5.2.4 Commercial. The preserved regulators shall be packed in accordance with the requirements of ASTM D 3951.

5.2.5 Palletization. When specified (See 6.2) unitized loads, commensurate with the level of packing specified in the contract or order, shall be palletized in accordance MIL-STD-147. Unitized loads shall be uniform in size and quantities to the greatest extent possible. If the container is of a size which does not conform to any of the pallet patterns specified in MIL-STD-147, the pallet pattern used shall first be approved by the contracting officer.

5.3 Marking. Interior and exterior packages shall be marked in accordance with MIL-STD-129. In addition to any other marking required by contract or order, unit packages shall be marked as follows:

CLEANED FOR OXYGEN SERVICE
DO NOT OPEN UNTIL READY FOR USE

6. NOTES

6.1 Intended use. The type MA-1 high-pressure oxygen regulator covered by this specification is for use on the type MB-2 oxygen recharging trailer to regulate the transfer of oxygen from supply cylinders to aircraft oxygen systems.

* 6.2 Ordering data. Procurement documents should specify the following:

a. Title, number, and date of this specification.

b. Selection of applicable levels of preservation, packaging, and packing (see Section 5).

c. When palletized loads are required (see 5.2.5).

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:03Z
Check the source to verify that this is the current version before use.

* 6.3 Provisions for qualification testing. With respect to product requiring qualification, awards will be made only for products which are at the time set for opening of bids qualified for inclusion in the applicable Qualified Products List whether or not such products have actually been so listed by that date. The attention of the suppliers is called to this requirement, and manufacturers are urged to arrange to have the products that they propose to offer to the Federal Government tested for qualification in order that they may be eligible to be awarded contracts or orders for the products covered by this specification. The activity responsible for the Qualified Products List is SA-ALC/MMEDO, Kelly AFB, TX 78241 and information pertaining to qualification of products may be obtained from that activity.

6.4 Reclaimed materiels. The use of reclaimed materiels shall be encouraged to the maximum extent possible.

* 6.5 Changed from previous issue. The margins of this specification are marked with asterisks to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodians:
Army - AV
Navy - AS
Air Force - 99

Review activities:
DLA - CS

Preparing activity:
Air Force - 82

(Project 4820-0483)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:03Z
Check the source to verify that this is the current version before use.