NOT MEASUREMENT SENSITIVE

MIL-L-11484/192
17 May 1993

MILITARY SPECIFICATION SHEET

LAPEL BUTTON, DISTINGUISHED SERVICE MEDAL, DEPARTMENT OF TRANSPORTATION

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-L-11484.

Chip 20

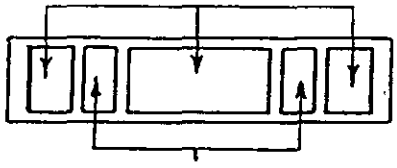

Chip 7

MATERIAL: Red Brass

FINISH: Hard Enameled, Gold Plated, Mirror-like Polished and shall match TIOH Metal Finish Chip Number 6.

DIMENSIONS:

WIDTH: 21/32 inch (1.67 cm) (REF)
HEIGHT: 9/64 inch (0.36 cm) (REF)
THICKNESS: 0.045 inch ± 0.010 inch (0.114 cm ± 0.025 cm)

NOTES:

1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. The attaching device shall be prong with pick and flat ball clutch type. The prong shall be centered on the reverse side and fused or soldered to the label button.

AMSC N/A FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 202610-17T17:17Z
Check the source to verify that this is the current version before use.

3. The enameled areas shall be as indicated. The color shall conform to the TIOH chip numbers listed below or the standard sample.

COLOR	CHIP NO.
Orange	7
Blue	20

4. Epoxy resin (stoning epoxy) may be used in lieu of hard enamel at the option of the manufacturer. The epoxy resin shall be a stoning epoxy, have a shore D hardness of no less than 85 and incorporate an ultraviolet inhibitor.

Custodian:
Army - IH

Review activities:
DLA - CT

User activities:
Other - DOT

Preparing activity:
Army - IH

(Project No. 8455-0715)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T17:17Z
Check the source to verify that this is the current version before use.