NOT MEASUREMENT SENSITIVE

MIL-L-11484/200
14 January 1994
SUPERSEDING
MIL-L-11484/29E (IN PART)
20 June 1989

MILITARY SPECIFICATION SHEET

LAPEL BUTTON, MERITORIOUS CIVILIAN SERVICE AWARD, DEFENSE LOGISTICS AGENCY

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-L-11484.

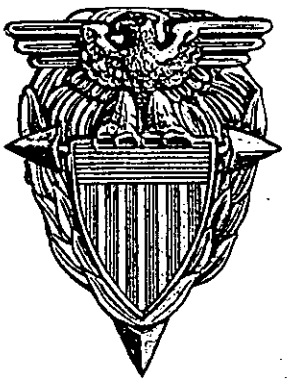

MATERIAL: Red Brass

FINISH:
BASE: Gold Plated, Rose Gold Plated, Matte Finish, Highlighted

DEVICE: Nickel Plated, Silver Plated, Oxidized, Relieved, Matte Finish and shall match TIOH Metal Finish Chip Number 14.

DIMENSIONS:
DIAMETER: 9/16 inch (1.43 cm) (REF)
THICKNESS:
BASE (Over Arrows): 0.050 inch ± 0.005 inch (0.127 cm ± 0.012 cm)
DEVICE (Wing Tips): 0.040 inch ± 0.005 inch (0.102 cm ± 0.012 cm)

ASSEMBLED THICKNESS (Eagle's Breast): 0.100 inch ± 0.005 inch (0.254 cm ± 0.012 cm)

AMSC N/A FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 202610-17T17:20Z
Check the source to verify that this is the current version before use.

NOTES:

1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. Lapel button shall be lacquered.

3. Attaching device shall be prong with pick and flat ball type clutch. The prong shall be centered on the reverse side and fused or soldered to the lapel button.

Custodians:
Army - IH

Review activities:
DLA - CT

Preparing activity:
Army - IH

(Project No. 8455-0744)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T17:20Z
Check the source to verify that this is the current version before use.