NOT MEASUREMENT SENSITIVE

MIL-DTL-11484/201A
27 September 1996
SUPERSEDING
MIL-L-11484/201
14 January 1994

DETAIL SPECIFICATION SHEET

LAPEL BUTTON, SUPERIOR CIVILIAN SERVICE AWARD, DEFENSE LOGISTICS AGENCY

This specification is *approved for use* by all *Departments* and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-11484 listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation.

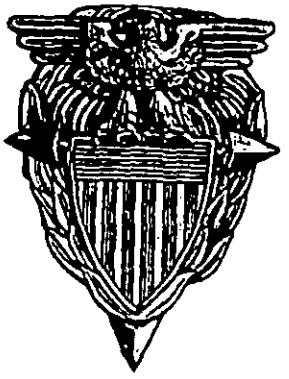

MATERIAL: Red Brass

FINISH:
BASE: Oxidized, Relieved, Matte Finish and shall match TIOH Metal Finish Chip Number 4.

DEVICE: Gold Plated, Rose Gold Plated, Relieved, Matte Finish

DIMENSIONS:
DIAMETER: 9/16 inch (1.43 cm) (REF)
THICKNESS:
BASE (Over Arrows): 0.050 inch ± 0.005 inch (0.127 cm ± 0.012 cm)
DEVICE (Wing Tips): 0.040 inch ± 0.005 inch (0.102 cm ± 0.012 cm)

ASSEMBLED THICKNESS (Eagle's Breast): 0.100 inch ± 0.005 inch (0.254 cm ± 0.012 cm)

AMSC N/A FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T17:21Z
Check the source to verify that this is the current version before use.

NOTES:

1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. Lapel button shall be lacquered.

3. Attaching device shall be prong with pick and flat ball clutch. The prong shall be centered on the reverse side and fused or soldered to the lapel button.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodian:
Army - IH

Review activities:
DLA - CT

Preparing activity:
Army - IH

(Project No. 8455-0858)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T17:21Z
Check the source to verify that this is the current version before use.