MIL-A-417G(AR)
27 FEBRUARY 1983
SUPERSEDING
MIL-A-417F(PA)
1 December 1974

MILITARY SPECIFICATION

ADAPTER, PRIMING: M1A4

This specification is approved for use by the US Army Armament Research and Development Command, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers quality assurance provisions and preparation for delivery for Adapter, Priming: M1A4, (see 6.1).

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications and standards. Unless otherwise specified (see 6.2), the following specifications and standards of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation, form a part of this specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

PPP-T-76	- Tape, Packaging, Paper (For Carton Sealing).
PPP-B-636	- Box, Shipping, Fiberboard.

MILITARY

MIL-P-116	- Preservation, Methods of.
MIL-B-117	- Bags, Interior Packaging.
MIL-B-2427	- Boxes, Ammunition Packing, Wood, Nailed.
MIL-B-22191	- Barrier Material, Transparent, Flexible, Heat Sealable.
MIL-A-48078	- Ammunition, Standard Quality Assurance Provisions, General Specification For.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commander, US Army Armament Research and Development Command, Attn. DRDAR-QA, Dover, New Jersey 07801 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T07:23Z
Check the source to verify that this is the current version before use.

STANDARDS

MILITARY

MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129	- Marking for Shipment and Storage.
MIL-STD-1188	- Commercial Packaging of Supplies and Equipment.

2.1.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this specification to the extent specified herein.

DRAWINGS (see 6.5)

US ARMY ARMAMENT RESEARCH AND DEVELOPMENT COMMAND

8800913 - Adapter, Priming, M1A4.

(Copies of specifications, standards, handbooks, drawings, and publications required by manufacturers in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting officer.

2.2 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein, the text of this specification shall take precedence.

3. REQUIREMENTS

3.1 Material. Materials shall be in accordance with the applicable drawings, specifications and standards.

3.2 Priming adapter. The priming adapter shall comply with all requirements specified on Drawing (Dwg.) 8800913, all associated drawings, and with all requirements specified in applicable specifications and standards.

3.3 Instruction sheet. One (1) instruction sheet shall be furnished with each 12 adapters as specified in 5.1.1. The instruction sheet shall be not less than 5 3/4 inches by 9 7/8 inches in size and shall be made by reproducing figure 1 on 40 pound offset, based on 1,000 sheets, 17 inches by 22 inches.

3.4 First article inspection. This specification contains technical provisions for first article inspection. Requirements for the submission of first article samples by the contractor shall be as specified in the contract.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T07:23Z
Check the source to verify that this is the current version before use.

3.5 Workmanship. All parts and assemblies shall be fabricated and finished in a thorough, workmanlike manner and all manufacturing, processing, and assembly operations shall be correctly performed. They shall be free of burrs, chips, sharp edges, cracks, crazes, unblended radii, porosity, warpage, burn marks, checks, chipped edges, blisters, excess flash, dirt, grease, rust, salt deposits, visible raised cement seams, corrosion products, projecting ridges at the dividing line of the mold, and other defects and foreign matter which would affect their serviceability. The cleaning method used shall not be injurious to any part or assembly nor shall the parts be contaminated by the cleaning agent. All required markings shall be neat, legible and sharply defined. External threads shall be full, complete and undamaged for their entire length.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection and standard quality assurance provisions. Unless otherwise specified herein or in the contract, the provisions of MIL-A-48078 shall apply and are hereby made a part of this detail specification.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.3).

b. Quality conformance inspection (see 4.4).

4.3 First article inspection.

4.3.1 Submission. The contractor shall submit a first article sample as designated by the Contracting Officer for evaluation in accordance with provisions of 4.3.2. The first article sample shall consist of the following items in sample quantities as indicated below and Table I.

TABLE I

Part Description	Drawings	Quantity
Adapter, Priming: M1A4	8800913	10 (Note 1)

NOTE 1: In addition to the ten adapters, the contractor shall submit at least five (5) items from each cavity used to produce molded parts and be so identified as to permit tracing each item to the cavity in which it was molded.

4.3.2 Inspections to be performed. See MIL-A-48078 and Table I as specified herein.

4.3.3 Rejection. See MIL-A-48078.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T07:23Z
Check the source to verify that this is the current version before use.

TABLE I. First article inspection.

CLASSIFICATION OF DEFECTS & TESTS

MIL-A-417G(AR)

PARAGRAPH	TITLE: Adapter, Priming: M1A4		SHEET 1 OF 1		DRAWING NUMBER: 8800913
					NEXT HIGHER ASSEMBLY: -
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
	Examination for Defects	10(a)	-	3.2	4.4.2.1

NOTES: (a) This quantity is in addition to the adapters required by 4.3.1, Note 1.

DRDAR-QA Form 160 Jul 77

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T07:23Z
Check the source to verify that this is the current version before use.

4.4 Quality conformance inspection.

4.4.1 Inspection lot formation. Inspection lots shall comply with the lot formation provisions of MIL-A-48078.

4.4.1.1 Cavity identification. The contractor shall maintain an approved cavity identification system. Components shall be grouped and identified until all inspections have been completed.

4.4.2 Examination. See MIL-A-48078.

a. Sampling plans. Unless otherwise specified in the classification of Defects and Tests Tables, sampling plans and procedures for major and minor defects shall be in accordance with MIL-STD-105, Inspection Level II.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T07:23Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.1	Adapter, Priming: M1A4	1 OF 1	8800913
			NEXT HIGHER ASSEMBLY: --

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Pitch diameter of thread, minimum (min)		0.40%(a)	3.2	Gage
102	Major diameter of thread, (min)		0.40%(a)	3.2	Gage
103	Major diameter of thread, maximum (max)		0.40%(a)	3.2	Gage
104	Depth of counterbore, max.		0.40%(a)	3.2	Gage
105	Diameter of fuse hole, min.		0.40%(a)	3.2	Gage
Minor					
201	Distance between shoulder behind thread to major diameter of perfect thread		0.65%(a)	3.2	Gage
202	Width across flats		0.65%(a)	3.2	Gage
203	Total length		0.65%(a)	3.2	Gage
204	Diameter of counterbore (.32)		0.65%(a)	3.2	Gage
205	Length of flats		0.65%(a)	3.2	Gage
206	Width of slot, max.		0.65%	3.2	Gage
207	Instruction sheet missing (level A packing only)		0.65%	3.3	Visual
208	Slot obstructed or missing		0.65%	3.2	Visual
209	Plastic workmanship unsatisfactory		0.65%	3.4	Visual
210	Threads damaged		0.65%	3.4	Visual
211	Poor workmanship		1.0%	3.5	Visual

NOTES: a. See 4.4.4 for alternate method of inspection.

DRDAR-QA Form 160 Jul 77

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T07:23Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-A-417G(AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.2	Carton, Prior to Sealing				See 5.1
					NEXT HIGHER ASSEMBLY
					See 5.1
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Adapter missing		0.40%	5.1	Visual
102	Carton or filler damp or wet		0.40%	5.1	Visual/Manual
Minor					
201	Label missing		0.65%	5.1	Visual
202	Marking misleading or unidentifiable		0.65%	5.1	Visual
203	Poor workmanship		1.0%	3.5	Visual

NOTES:

DRDAR-QA Form 160 Jul 77

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T07:23Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.3	Sealed Barrier Bag				See 5.1
					NEXT HIGHER ASSEMBLY
					See 5.2
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Heat seal test	(a)	(a)	(a)	4.5.1
102	Waterproofness of barrier bag destroyed by rupture, puncture, or separation of heat seal		0.40%	5.1.1	Visual
103	Bag punctured, torn or cut		0.40%	3.2	Visual
Minor					
201	Marking missing, misleading or undentifiable		0.65%	3.2	Visual
202	Heat seal of barrier bag located so that one or more subsequent seals cannot be applied		0.65%	3.4	Visual
203	Poor workmanship		1.0%	3.5	Visual

NOTES: (a) Sampling and rejection shall be in accordance with MIL-P-116.

DRDAR-QA Form 160 Jul 77

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T07:23Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-A-417G(AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.4	Box, Packing	1 OF 1	See 5.2
			NEXT HIGHER ASSEMBLY: —

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Contents loose		0.40%	5.2	Manual
102	Strapping broken or loose		0.40%	5.2	Visual/Manual
103	Box damaged to extent that contents are exposed or liable to become exposed		0.40%	5.2	Visual
Minor					
201	Strapping mislocated		0.65%	5.2	Visual
202	Marking misleading or unidentifiable		0.65%	5.2	Visual
203	Metallic seal missing, unsealed		0.65%	5.2	Visual
204	Hardware improperly assembled		0.65%	5.2	Visual
205	Poor workmanship		1.0%	5.2	Visual

NOTES:

DRDAR-QA Form 160 Jul 77

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T07:23Z
Check the source to verify that this is the current version before use.

4.4.3 Testing. Testing is described in the First article and Quality Conformance Inspection tables.

4.4.4 Dimensional control of moled parts (see 4.4.1.1). The requirements of this paragraph apply to those dimensions which are considered "as molded", and which do not undergo subsequent operations. In place of normal sampling and inspections associated with the Classification of Defects, and with the approval of the Contracting Officer, and after a curing time for the parts has been approved (see Note 1), a sample of five (5) parts (as molded) from each cavity shall be inspected dimensionally to qualify a new or reworked cavity for use in production. The molded parts shall carry the individual cavity identification when more than one cavity is used in production. As a control of each cavity during production, the above quantity of parts from each cavity shall be inspected for the dimensional defects listed in paragraph 4.4.2.1 after continuous production of each 5,000 parts or at the end of each week, whichever occurs first. Of the five (5) samples, one (1) sample shall be the last part produced. If any defective parts are found during qualification of the cavity, the cavity producing the defective parts shall not be used in production. If any defective parts are found when inspection is performed for the control of the cavity, the cavity producing the defective part shall be removed from production. Further, that portion of production since the last control check shall be returned to the contractor for inspection for each separate type of defect according to MIL-STD-105, using an AQL of 0.40 percent for each major defect and an AQL of 0.65 percent for each minor defect. All cavities removed from production because of some fault, may, after reworking, be returned to production providing they pass the qualification test above. The Contractor may request a change of inspection frequency providing he presents objective evidence to the contracting officer to substantiate the request.

NOTE 1. The curing time shall be established by checking ten (10) parts from each cavity at periodic intervals (e.g., every 30 min, 60 min, etc.), until dimensional stability is attained. The curing time will be from the time the part comes out of the mold until dimensional stability is attained. The inspection data used in determining the curing time shall be sent to U.S. Army Armament Research and Development Command (ARRADCOM), Dover, NJ 07801, ATTN: DRDAR-QAT-M. If there is a change in material, cycle time, or if a cavity is reworked, or a new cavity is used, a new curing time shall be established and approved.

4.4.5 Inspection equipment. The inspection equipment required to perform the inspections and tests prescribed in this specification is identified in the "Paragraph Reference/Inspection Method" column in the tables starting with paragraph 4.4.2.1, and the test method paragraph (See 4.5). The contractor shall submit for approval inspection equipment designs in accordance with the terms of the contract. See Section 6 of MIL-A-48078 and 6.3 herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T07:23Z
Check the source to verify that this is the current version before use.

4.5 Methods of inspection.

4.5.1 Heat seal test of barrier bag. This test shall be performed as specified in MIL-P-116.

5. PACKAGING

5.1 Preservation - packaging.

5.1.1 Level A (Unit packaging). Twelve (12) adapters and one (1) folded instruction sheet (See 3.3) shall be packaged in a barrier bag conforming to Type II, Class C of MIL-B-117. Transparent polyethylene material of minimum 3 mil thickness, conforming to MIL-B-22191, Type II or III, may be substituted as bag material. Bag size shall be approximately 3-1/4 by 5 inches inside dimensions. Bags shall be closed by heat-sealing. Seals shall meet the heat seal requirements of MIL-P-116.

5.1.2 Level A (intermediate packaging). Two hundred (200) unit packages shall be bulk packaged in a fiber box conforming to PPP-B-636, Type CF, Class Domestic, Style RSC, Variety SW, Grade 200. A filler pad constructed of the same fiberboard as the box shall be placed on the bottom of the box and on the top of the contents. The filler pad shall be equal to the inside length and width of the box less 1/8 inches. Additional filler pads shall be added on top of the contents when required to provide a tight pack. Boxes shall be closed by applying a length of pressure-sensitive tape, PPP-T-76, 2 inches in width over the entire length of the top and bottom center seams of the box with approximately 3 inches extension onto the end panels. Each box shall be inserted into a barrier bag conforming to MIL-B-117, Type I, Class E requirements. All excess air shall be exhausted from the bag and the bag closed by means of heat-sealing. Seals shall meet the heat seal requirements of MIL-P-116.

5.1.3 Level B (unit packaging). Packaging shall be as specified in Level A.

5.1.4 Level B (intermediate packaging). Packaging shall be as specified in Level A.

5.1.5 Level C (unit packaging). Packaging shall be as specified in Level A.

5.1.6 Commercial (intermediate packaging). Packaging shall be in accordance with MIL-STD-1188.

5.2 Packing.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T07:23Z
Check the source to verify that this is the current version before use.

5.2.1 Level A. Two (2) Level A, intermediate packages shall be packed in a nailed wood box complying with Grade A, Type II, Class 2 requirements of MIL-B-2427. The box shall be closed and strapped in accordance with the appendix of the specification.

5.2.2 Level B (When applicable). Packing shall be as specified in Level A.

5.2.3 Commercial. Packing shall be in accordance with MIL-STD-1188.

5.3 Marking. Each Level A unit, intermediate and exterior container, shall be marked in accordance with MIL-STD-129. Commercial intermediate and exterior containers shall be marked in accordance with MIL-STD-1188.

5.4 Shipping. When adapters from more than one lot are shipped as a carload, each lot shall be kept separate and the division between lots clearly indicated to prevent mixing of the lots in transit.

6. NOTES

6.1 Intended Use. The M1A4 priming adapter is used to simplify the priming of military demolition explosives having threaded cap wells, and using Army special blasting caps, both electric and non-electric.

6.2 Ordering data. See MIL-A-48078.

6.3 Submission of inspection equipment designs for approval. (See MIL-A-48078). Equipment designs shall be submitted as required to: Commander, U.S. Army Armament Research and Development Command, ATTN: DRDAR-QAT-I, Dover, New Jersey, 07801. Request letter of submittal should state contractor, contract number, specification number, item nomenclature, and classification of defects and tests paragraph number.

6.4 Data cards. (See MIL-A-48078). Distribution of data cards shall include the following: Commander, U. S. Army Armament Research and Development Command, ATTN: DRDAR-QAT-M, Dover, New Jersey 07801.

6.5 Drawings. Drawings listed in Section 2 of this specification under the heading US Army Armament Research and Development Command (ARRADCOM) may also include drawings prepared by, and identified as, Edgewood Arsenal, Frankford Arsenal, Rock Island Arsenal or Picatinny Arsenal drawings. Technical data originally prepared by these activities are now under the cognizance of ARRADCOM.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T07:23Z
Check the source to verify that this is the current version before use.

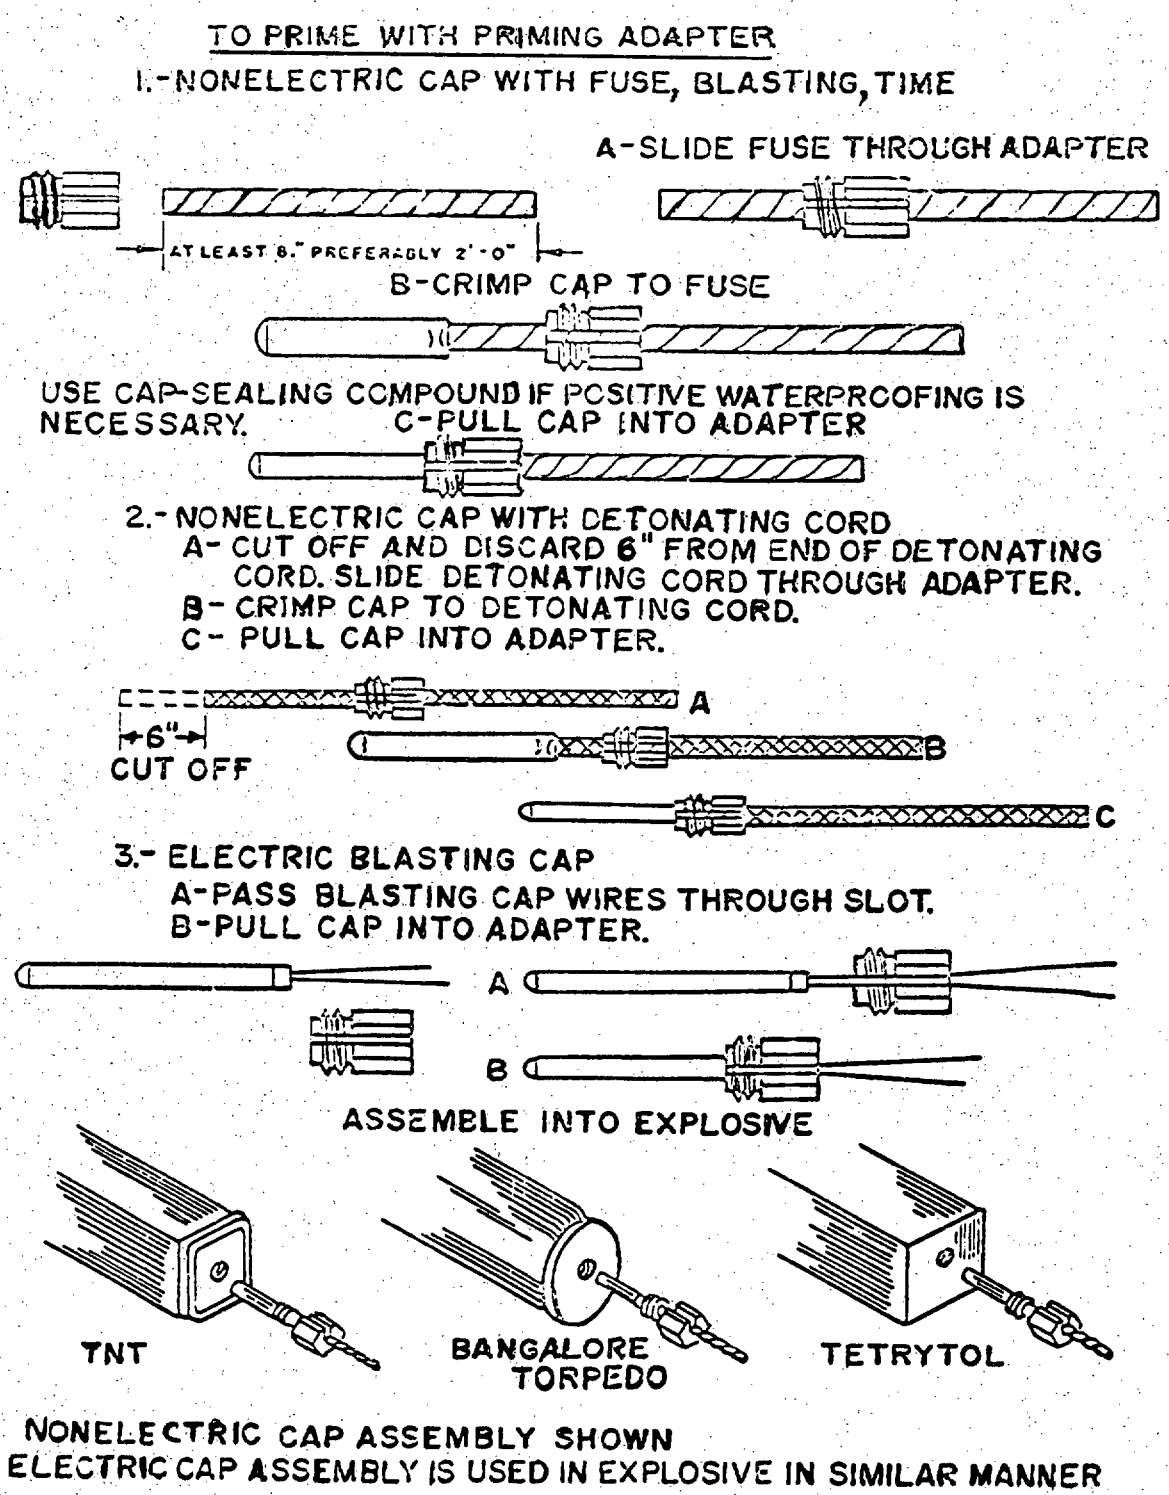


FIGURE 1. INSTRUCTION SHEET.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T07:23Z
Check the source to verify that this is the current version before use.

6.6 Changes from previous issue. Asterisks are not used in this revision to identify changes with respect to the previous issue, due to the extensiveness of the changes.

Custodian:
Army-AR

Preparing activity:
Army-AR

(Project 1375-A249)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T07:23Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE ARMY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12062 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commander
US Army Mobility Equipment Research & Development Command
ATTN: DRDME-DS
Fort Belvoir, VA 22060

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T07:23Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T07:23Z
Check the source to verify that this is the current version before use.