MIL-P-457C

30 July 1968
SUPERSEDING
MIL-P-457B
18 March 1965

MILITARY SPECIFICATION

POTS, COOKING, CORROSION-RESISTING STEEL, WITH COVER

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope.- This specification covers corrosion-resisting steel cooking pots with cover (see 6.1).

* 1.2 Classification.- Cooking pots shall be of the following types and sizes as specified (see 6.2).

Type I - With faucet and strainer.
Type II - Without faucet and strainer.

Size 1 - 16-quart capacity.
Size 2 - 24-quart capacity.

2. APPLICABLE DOCUMENTS

* 2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

SPECIFICATIONS

FEDERAL

QQ-S-682 - Steel, Corrosion-Resisting-Clad Plates, Sheets, and Strips.
QQ-S-763 - Steel Bars, Shapes, and Forgings, Corrosion-Resisting.
UU-P-268 - Paper, Kraft, Untreated, Wrapping.
PPP-B-636 - Box, Fiberboard.
PPP-F-320 - Fiberboard; Corrugated and Solid, Sheet Stock (Container Grade), and Cut Shapes.

FSC 7330

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T07:29Z
Check the source to verify that this is the current version before use.

STANDARDS

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129 - Marking for Shipment and Storage.
MIL-STD-147 - Palletized and Containerized Unit Loads 40" x 48" 4-Way (Partial) Pallet Skids, Runners, or Pallet-Type Base.

(Copies of specifications and standards required by suppliers in connection with specific procurement functions should be obtained from the procuring agency or as directed by the contracting officer.)

DRAWING

ARMY NATICK LABORATORIES

2-9-55 - Pot, Cooking, Corrosion-Resisting Steel, With Cover.

(Note: Miniature copy of drawing 2-9-55, identified as figure 1, is attached for information purposes only.)

* 2.2 Other publications.- The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

NATIONAL SANITATION FOUNDATION (NSF)

Standard No. 2 - Food Service Equipment

Seal of Approval Listing of Food Service Equipment

(Application for copies should be addressed to the National Sanitation Foundation, P.O. Box 1468, Ann Arbor, Michigan 48106.)

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

Specification A 167-63 - Corrosion-Resisting Chromium-Nickel Steel Plate, Sheet, and Strip.

Specification A 511-64 - Seamless Stainless Steel Mechanical Tubing

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, Pa. 19106.)

Source: https://assist.dla.mil -- Downloaded: 202610-16T07:29Z
Check the source to verify that this is the currentversion before use.

(Technical society and technical association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

3. REQUIREMENTS.-

* 3.1 First article.- When specified (see 6.2), before production is commenced, a sample pot shall be submitted or made available to the contracting officer or his authorized representative for approval in accordance with 4.2. Approval of the preproduction sample authorizes the commencement of production, but does not relieve the supplier of responsibility for compliance with all applicable provisions of this specification. The preproduction sample shall be manufactured in the same facilities to be used for the manufacture of the production items.

3.2 Standard product.- The corrosion-resisting steel cooking pots delivered under this specification shall be the manufacturer's commercially current standard product, except for any changes necessary to comply with specification requirements.

* 3.3 NSF standard.- The pots covered by this specification shall conform to the applicable requirements of NSF Standard No. 2.

* 3.3.1 NSF certification.- The supplier shall submit satisfactory evidence to the contracting officer or his authorized representative that the pots he proposes to furnish under this specification meet the applicable requirements of NSF Standard No. 2 as follows:

(1) Listing in the current edition of the NSF "Listing of Food Service Equipment" or display of the NSF seal on the finished pot shall be submitted prior to approval of the preproduction sample, if one is submitted, or prior to approval of the first shipment or

(2) A certified test report from a recognized independent testing laboratory acceptable to the medical department of the service for which the pots are being procured, indicating that the pots have been tested and conform to NSF Standard No. 2, shall be submitted prior to the approval of the preproduction sample, if one is submitted, or prior to commencing production.

3.4 Materials.- The materials specified shall conform to the applicable specifications and requirements specified hereinafter. Materials not definitely specified shall be of the quality normally used in the manufacture of items of this type. Commercial tolerances shall apply to metal thickness for the strainer.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T07:29Z
Check the source to verify that this is the current version before use.

3.4.1 Steel, corrosion-resisting.-

* 3.4.1.1 Sheet.- Corrosion-resisting steel sheet shall conform to type 302 or 304 of ASTM Specification A 167-63.

3.4.1.2 Bar, shapes, and forgings.- Corrosion-resisting steel bar, shapes, and forgings shall conform to condition A, class 302 or 304 of QQ-S-763.

* 3.4.1.3 Clad Sheet.- Corrosion-resisting-Clad sheet shall conform to class 302 or 304, finish 2B, grade A of QQ-S-682.

* 3.4.1.4 Tube seamless.- Corrosion-resisting steel tube shall conform to any grade listed in ASTM Specification A 511-64.

* 3.5 Construction.- The pots and covers shall be similar to the illustration shown on Drawing 2-9-55. The illustration is not intended to prelude the purchase of pots otherwise meeting the requirements of this specification. The pots shall not show any deformation after the load test specified in 4.5.1, and shall not leak when tested as specified in 4.5.2.

* 3.5.1 Cover.- The covers for the size 1 and size 2 pots shall be fabricated from normal .0375 (20 gauge) steel specified in 3.4.1.1. The handle opening shall be a minimum of 21/32 of an inch high and 2-1/2 inches in width. The handle shall be attached to the cover by spot welding on each side.

* 3.5.2 Body.- The body of the size 1 and size 2 pots shall be fabricated from normal .050 (18 gauge) steel specified in 3.4.1.3 and shall be of one piece construction. The pots shall not vary more than plus or minus five percent of the volume of the indicated capacity when tested (see 4.5.2).

* 3.5.3 Handles, pot.- The pot handles shall be fabricated from corrosion-resisting steel tube specified in 3.4.1.4. The opening on the handles shall be a minimum of 3 inches in depth and 3 inches in width. The ends of the handle shall be formed to fit flush against the pot body. After forming, the handles shall be attached to the body by one of the following methods:

a. Fillet welded all around.
b. Spot welded, minimum of 5 places on each side.
c. Rivets brazier type, fabricated from material specified in 3.4.1.2. When rivets are used they shall be driven from the inside.

Source: https://assist.dla.mil -- Downloaded: 202610-16T07:29Z
Check the source to verify that this is the current version before use.

* 3.5.4 Strainer and faucet.- The type I pots shall have a strainer and faucet as shown on Drawing 2-9-55. The strainer shall be fabricated from corrosion-resisting steel specified in 3.4.1.1. The faucet shall be fabricated from corrosion-resisting steel specified in 3.4.1.2. The strainer and faucet shall be located equidistant from the handles in the location shown on Drawing 2-9-55. The faucet shall be removable for cleaning without the use of tools.

3.6 Finish.- The fabricated pot and cover shall be finished to meet the requirements of NSF Standard No. 2.

3.7 Marking for identification.- Marking for identification shall include manufacturer's name or trademark and otherwise shall conform to manufacturer's standard identification marking.

3.8 Workmanship.- The pots shall not contain any sharp edges, slivers, or burrs. The rivet heads, when used, shall be in full contact with both surfaces.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection.- Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

* 4.2 First article inspection.- When a preproduction sample is required, it shall be examined for defects listed in table I, dimensions specified, and tested as specified in 4.5.1 and 4.5.2.

4.3 Inspection.- Sampling for inspection shall be performed in accordance with MIL-STD-105, except where otherwise indicated hereinafter.

4.3.1 Component and material inspection.- In accordance with 4.1, the supplier is responsible for insuring that components and materials used are manufactured and inspected in accordance with the requirements of referenced subsidiary specifications and standards to the extent specified or, if none, in accordance with this specification.

4.3.2 Process examination.-

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T07:29Z
Check the source to verify that this is the current version before use.

4.3.2.1 In process examination.- Examination shall be made during the manufacturing process that the required number of holes, shown on Drawing 2-9-55, are drilled or punched in the strainer. Whenever nonconformance is noted, correction or replacement shall be made to the affected items in process.

4.3.3 End item inspection.- A lot shall consist of pots and covers of one type and size offered for inspection at one time. The sample unit for this examination shall be one pot and cover.

* 4.3.3.1 Visual examination.- The end item shall be examined for the defects set forth in table I. The inspection level shall be II with an acceptable quality level (AQL) of 2.5 for major defects and 6.5 for total defects, expressed in terms of defects per hundred units.

TABLE I.- Classification of defects

Examine	Defect	Classification Major	Minor
Finish			
Body and cover	Not as specified.	X	
Design, construction and workmanship	Sharp edges, burrs, or slivers.	X	
Body	Not one piece construction.	X	
Faucet and strainer (when applicable)	Not as shown on Drawing 2-9-55.	X	
	Strainer missing.	X	
	Strainer holes more or less than specified on Drawing 2-9-55.		X
Cover	Missing.	X	
Handles and body	Missing.	X	
	Not size specified.	X	
	Not as shown on Drawing 2-9-55.	X	
	Not attached as specified.	X	
Rivets (when used)	Less than specified per handle.	X	
	Not type specified.	X	
	Heads not on inside.		X
Marking for identification	Missing, illegible.		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T07:29Z
Check the source to verify that this is the current version before use.

4.3.3.2 Dimensional examination.- Inspection shall be made of the pots and covers for compliance with the dimensions specified herein. Any deviation from the specified requirements shall constitute a defect. The inspection level shall be S-2 with an AQL of 4.0, expressed in terms of defects per hundred units.

4.3.3.3 Testing of the end product.- The end product shall be tested as specified in 4.5.1 and 4.5.2. The inspection level shall be S-2 and the AQL shall be 4.0, expressed in terms of defects per hundred units.

4.3.4 Examination of preparation for delivery.- An examination will be made to determine that packaging, packing, and marking as required by section 5 of this specification are complied with. Defects shall be scored as set forth in table II. The lot shall be the number of containers offered for delivery at one time. The sample unit shall be one container fully prepared for delivery. The inspection level shall be S-2 and the AQL shall be 4.0, expressed in terms of defects per hundred units.

4.3.4.1 Examination of shipping containers.- When shipping containers are required to be in accordance with PPP-B-636, examination for defects in closure, waterproofing, and strapping shall be in accordance with PPP-B-636.

TABLE II.- Examination of preparation for delivery

Examine	Defect
Marking, exterior and interior	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application.
Material	Component missing, damaged, or otherwise defective.
Contents	Number per container is more or less than required.

* 4.4 Code and standards compliance.- Proof of compliance with the requirements of NSF (see 3.2) shall be available to the Government representative.

4.5 Test.-

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T07:29Z
Check the source to verify that this is the current version before use.

* 4.5.1 Load test.- After fabrication, and prior to the capacity and leakage test, each size pot shall be uniformally loaded (50 pounds in the 16 quart and 75 pounds in the 24 quart as applicable) and lifted three times by the handles from the floor to a table height of 36 inches, plus or minus 3 inches. The pots shall be examined to determine compliance with 3.5.

* 4.5.2 Capacity and leakage test.- The size 1 and 2 pots, as applicable, using a known measure, shall be filled to capacity. The results shall be examined to determine compliance with 3.5.2. Water shall be used for this test. After the capacity test, the pots shall be filled with water and stand for 30 minutes to determine compliance with 3.5.

5. PREPARATION FOR DELIVERY

5.1 Packaging.- Packaging shall be level A or C as specified (see 6.2).

* 5.1.1 Level A.- Each pot, when provided with faucet and strainer, shall have the shoulder of the strainer wrapped in minimum 30 pound kraft paper conforming to UU-P-268. The wrapped strainer shall be tightly fitted to the interior of the faucet so that it cannot work loose in shipment. The faucet handle shall be turned until it contacts the body of the pot. The pot, with or without the faucet and strainer, shall be packed in a snug-fitting fiberboard box conforming to style RSC, type CF, variety SW, or type SF, class domestic, grade 275 of PPP-B-636. The pot shall be placed in the container with the handles projecting into diagonally opposite corners. Triangular shaped filler pieces, fabricated from the same fiberboard material as the box, having a length equal to at least two-thirds of the depth of the box shall be fitted perpendicular in each of the four corners contacting the sides of the pot and adjacent walls of the box. These filler pieces shall be located below the handles in two corners of the box, and when pots are furnished with faucets, one piece shall be located above the faucet. The cover of each pot shall be inverted so that the handle projects down into the body of the pot. A sheet made from the same material and having length and width dimensions identical to those of the fiberboard box shall be placed between the body of the pot and the cover and shall be slotted to permit the handle of the inverted cover to pass through it. Closure shall be in accordance with the appendix of the box specification.

* 5.1.2 Level C.- The pots shall be packaged to afford adequate protection against damage during shipment from the supply source to the first receiving activity. The supplier may use his standard practice when it meets this requirement.

5.2 Packing.- Packing shall be level A, B, or C as specified (see 6.2).

Source: https://assist.dla.mil -- Downloaded: 202640-16T07:29Z
Check the source to verify that this is the currenversion before use.

* 5.2.1 Level A.- Four pots, packaged as specified in 5.1, shall be packed in a snug-fitting fiberboard shipping container conforming to style RSC, V2s of PPP-B-636. Closure, waterproofing by means of tape, and reinforcing with flat strapping or tape banding shall be in accordance with the appendix of PPP-B-636.

* 5.2.2 Level B.- Four pots, packaged as specified in 5.1, shall be packed in a snug-fitting fiberboard shipping container conforming to style RSC, type CF, variety SW, or type SF, class domestic of PPP-B-636. Closure shall be in accordance with method II of the appendix of PPP-B-636.

* 5.2.2.1 When specified (see 6.2), the shipping container shall be V3c or V3s, fabricated and closed in accordance with PPP-B-636. The shipping container material may also be grade V4s of PPP-B-320.

5.2.3 Level C.- Pots, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. Containers shall be in accordance with rules or regulations of carriers applicable to the mode of transportation.

* 5.3 Palletization.- Unless otherwise specified (see 6.2), pots packed as specified shall be palletized in accordance with Load Type I of MIL-STD-147 except that for overseas shipment the over-all height of the load shall not exceed 43-inches. Each prepared load shall be bonded with primary and secondary straps in accordance with bonding means K and L. Container patterns shall be in accordance with the appendix of MIL-STD-147. Interlocking of loads shall be effected by reversing the pattern of each course. If the container is of a size which does not conform to any of the container patterns specified in MIL-STD-147, the container pattern used shall be approved by the contracting officer.

5.4 Marking.- In addition to any special marking required by the contract or order, interior packages and shipping container shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use.- The cooking pots are intended for use on range tops for the preparation of soup, boiling of vegetables, and other foods requiring liquid medium for cooking, preparation of coffee by the pot method, and for the heating of other liquids as may be required.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T07:29Z
Check the source to verify that this is the current version before use.

6.2 Ordering data.- Procurement documents should specify the following:

(a) Title, number, and date of this specification.
(b) The type and size of pot required (see 1.2).
(c) First article.- When preproduction sample is required (see 3.1).
(d) Selection of the applicable levels of packaging and packing (see 5.1 and 5.2).
(e) When weather-resistant class fiberboard shipping containers are required for level B packing (see 5.2.2.1).
(f) When palletization is not required (see 5.3).

6.3 The margins of this specification have been marked with an asterisk (*) to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and suppliers are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodians:

Army - GL
Navy - SA

Review activities:

Army -
Navy - SA

User activities:


Navy - MC, CG, MS

Preparing activity:

Army - GL

Project No. 7330-0256

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T07:29Z
Check the source to verify that this is the current version before use.

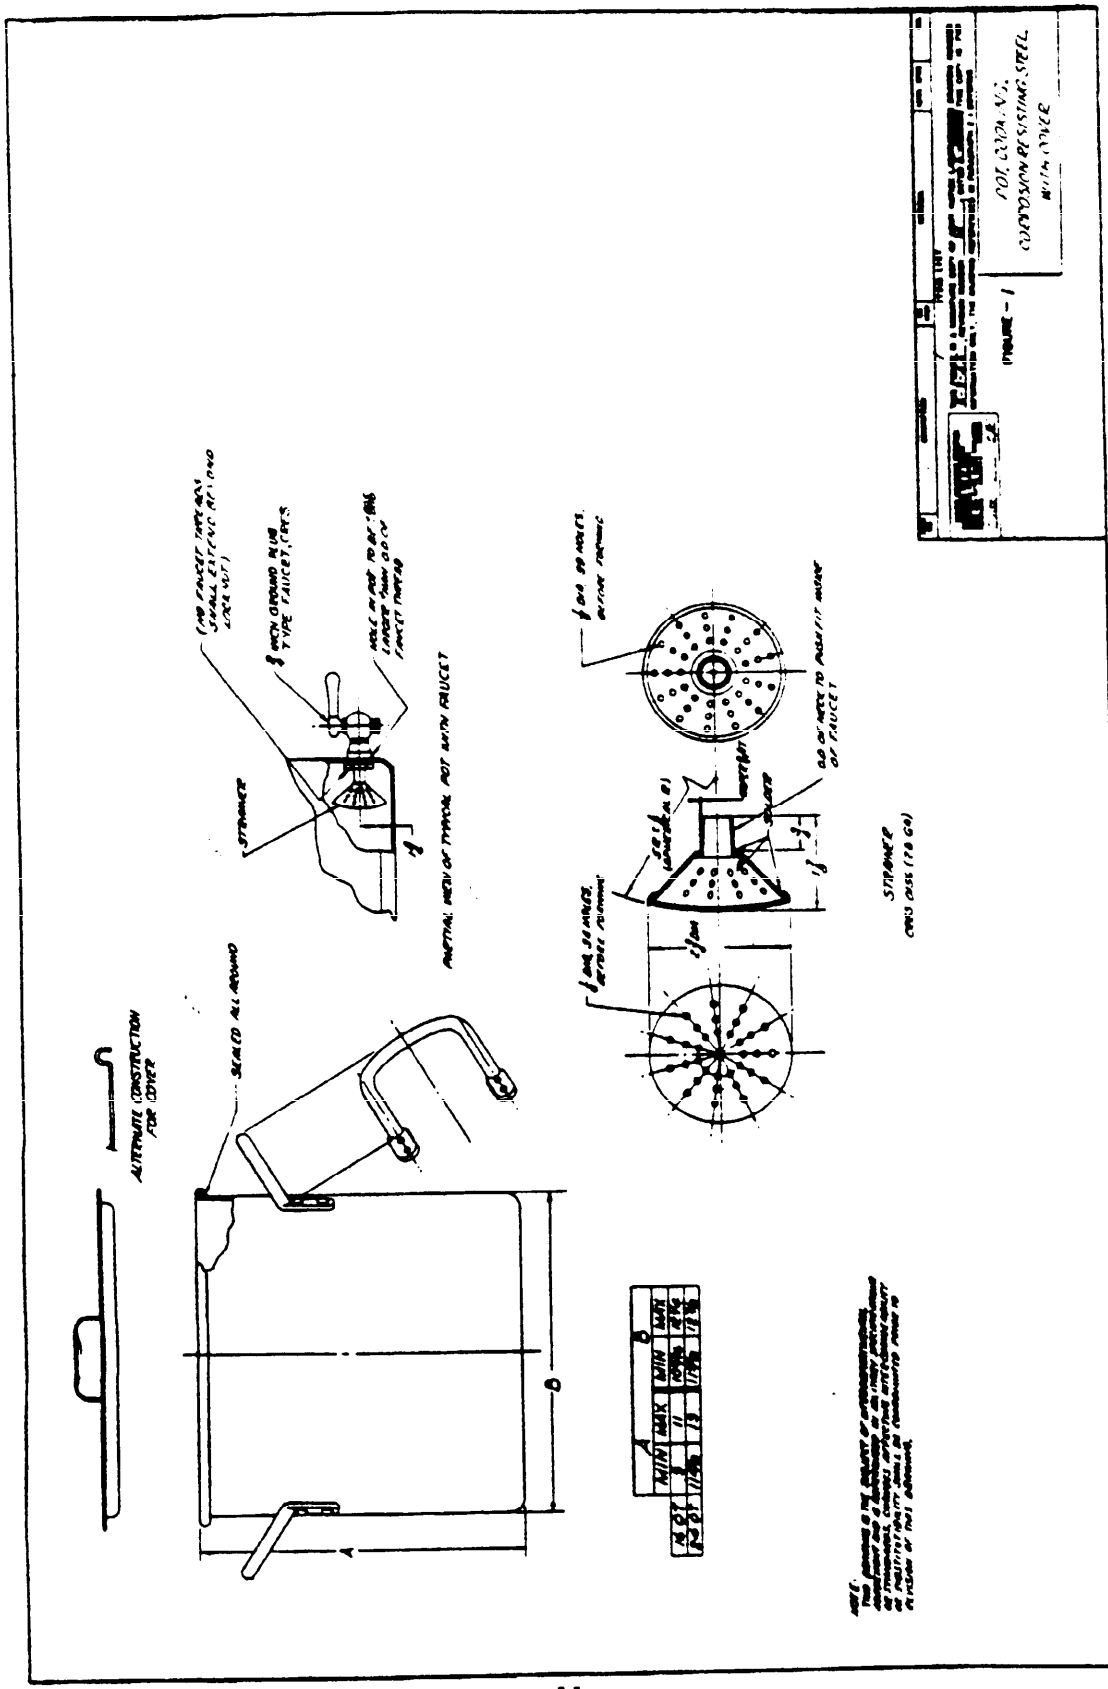

Source: https://assist.dla.mil -- Downloaded: 202610-16T07:29Z
Check the source to verify that this is the currentversion before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T07:29Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION

Pots, Cooking, Corrosion-Resisting Steel, With Cover MIL-P-457C

ORGANIZATION

CITY AND STATE

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO *(If "yes", in what way?)*

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)*

DATE

DD FORM 1 JAN 68 1426

REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED.

Source: https://assist.dla.mil -- Downloaded: 202610-16T07:29Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE ARMY
U. S. Army Natick Laboratories
Natick, Massachusetts 01760

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY

OFFICIAL BUSINESS

Commanding General
U. S. Army Natick Laboratories
ATTN: AMXRES-EQS
Natick, Massachusetts 01760

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T07:29Z
Check the source to verify that this is the current version before use.