MIL-S-422B

16 February 1966
SUPERSEDING
MIL-S-422A (GL)
20 December 1963

MILITARY SPECIFICATION

SCARFS, CHAPLAINS'

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope.- This specification covers the requirements for chaplains' scarfs (Christian and Jewish).

1.2 Classification.- The scarfs shall be of the following types as specified (see 6.2):

Type I - Scarf, Chaplain's, Christian Faith (Army).

Type II - Scarf, Chaplain's, Jewish Faith (Army).

Type III - Scarf, Chaplain's, Christian Faith (Air Force).

Type IV - Scarf, Chaplain's, Jewish Faith (Air Force).

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

V-T-276 - Thread, Cotton
UU-P-553 - Paper, Wrapping, Tissue
CCC-T-191 - Textile Test Methods
PPP-B-636 - Box, Fiberboard
PPP-B-676 - Boxes, Setup
PPP-T-60 - Tape; Pressure-Sensitive Adhesive, Waterproof, for Packaging and Sealing

/FSC 9925/

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T07:24Z
Check the source to verify that this is the current version before use.

MILITARY

MIL-B-43291 - Boxes: Fiberboard, Corrugated, Double-Wall, Weather Resistant

STANDARDS

FEDERAL

Fed. Std. No. 751 - Stitches, Seams and Stitchings

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129 - Marking for Shipment and Storage.

(Copies of specifications and standards required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications.- The following document forms a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

COLOR ASSOCIATION OF THE UNITED STATES, INC.
U. S. Army Standard Color Card for the Official Colors for Arms and Services.

(Application for copies of the color card should be addressed to the Color Association of the United States, Inc., 200 Madison Avenue, New York, N. Y.)

3. REQUIREMENTS

3.1 Samples.-

3.1.1 Guide samples.- Guide samples, when furnished, are solely for guidance and information to the supplier (see 6.3). Variations from this specification may appear in the sample, in which case this specification shall govern.

3.1.2 Standard sample.- The scarfs shall match the standard sample for shade and shall be equal to or better than the standard sample with respect to all characteristics for which the standard sample is referenced (see 6.3).

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T07:24Z
Check the source to verify that this is the current version before use.

3.1.3 Preproduction sample.- When specified (see 6.2), before production is commenced, a sample of the finished item shall be submitted or made ready for the contracting officer or his authorized representative for inspection as specified in 4.2.1. The approval of the preproduction sample authorizes the commencement of production, but does not relieve the supplier of responsibility for compliance with all applicable provisions of this specification. The preproduction sample shall be manufactured in the same facilities to be used for the manufacture of the production items.

3.2 Material.-

3.2.1 Bengaline.- The fabric shall be a bengaline made of a rayon warp and a cotton filling conforming to the minimum physical requirements specified in table I, when tested as specified in 4.3.1.

TABLE I - Physical requirements

Weight/Sq. Yard (ounces)	Yarns per inch		Breaking strength (pounds)		Weave
	Warp	Filling	Warp	Filling	
7.0	140	25	100	100	Plain

3.2.1.1 Yarns.- The warp shall be multifilament, regenerated cellulose type, of the viscose or cuprammonium process, bright luster rayon yarn. The filling shall be a two-ply cotton yarn.

3.2.2 Color.- The color of the bengaline for type I scarf shall be Black (Cable No. 65018) and for type II scarf shall be bleached white. The color of the bengaline for types III and IV scarfs shall be Silver Gray (Cable No. 65008). The use of sulfur dyes and dyes containing elementary sulfur or compounds capable of oxidation to sulfuric acid is prohibited. The dyed yarn shall show no more free or sulfide sulfur than the standard sample (see 6.3) when tested as specified in 4.3.1.

3.2.2.1 Matching.- The color of bengaline shall match the standard sample under natural (North sky) daylight or artificial daylight having a color temperature of 7500° Kelvin and shall be a good approximation to the standard sample under incandescent lamplight at 2800° Kelvin.

3.2.2.2 Colorfastness.- The bengaline fabric shall show fastness to wet-dry-cleaning, perspiration, crocking and light equal to or better than the standard sample when tested as specified in 4.3.1. When no standard sample is established, the dyed fabric shall show "good" fastness to wet-dry-cleaning, perspiration, and light, and show a Munsell value for crocking not lower than 6.5, when tested as specified in 4.3.1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T07:24Z
Check the source to verify that this is the current version before use.

3.2.3 Fringe.- The fringe shall be chainette (knit) with 14 to 18 stitches per inch, having a 3-row firm heading of 3 ends, 3/8 ± 1/16 inch deep. The rayon yarn for the fringe shall be one end of 600 (± 25) denier. The fringe for types I, III and IV scarfs shall weigh 1-1/8 oz. (min.) per linear yard and for type II scarf shall weigh 1-3/4 oz. (min.) per linear yard. The rayon yarn shall be multifilament, regenerated cellulose type, viscose or cuprammonium process, bright luster. The dyed fringe shall show "good" fastness to wet-dry-cleaning, and light when tested as specified. The color of the fringe for type I scarf shall be Black, shade AA, Cable No. 66043 and for type II scarf shall be bleached white. The color of the fringe for types III and IV scarfs shall be alternate two strands of Blue (Cable No. 65010) and two strands of Silver Gray (Cable No. 65008).

3.2.4 Thread.- The cotton thread for stitching and seaming shall conform to type IC2 (for types I, III and IV scarfs) and type IC1 (for type II scarf), ticket No. A/3 cord of V-T-276. The color of the thread for type I scarf shall be Black, shade AA, Cable No. 66043, and for type II scarf shall be bleached white. The color of the thread for types III and IV scarfs shall be Silver Gray (Cable No. 65008). The dyed thread shall show "good" fastness to wet-dry-cleaning and light when tested as specified in V-T-276.

3.2.5 Embroidery yarn (Schiffli).- The embroidery yarn shall be 100/2 ± 15 denier, multifilament, regenerated cellulose type, bright luster rayon viscose or cuprammonium process. The color of the embroidery yarn for types I and II scarfs shall match Old Gold (Cable No. 65021). The color of the embroidery yarn for types III and IV scarfs shall match Blue (Cable No.65010) and Silver Gray (Cable No. 65008). The dyed embroidery yarn shall show "good" fastness to wet-dry-cleaning and light when tested as specified in 4.3.1.

3.2.6 Bobbin thread (for Schiffli embroidery).- The bobbin thread used in Schiffli embroidering shall be undyed and shall be a continuous filament nylon yarn or two ply cotton yarn.

3.2.7 Buckram.- The backing for the Schiffli embroidered insignia shall be a light, open weave, undyed buckram conforming to the following minimum requirements:

Weight (ounces per square yard)	2.5
Warp yarns per inch	40
Filling yarns per inch	20
Warp breaking strength (lbs.)	30
Filling breaking strength (lbs.)	20

3.2.8 Label.- Each scarf shall have a label showing the manufacturer's name or readily identifiable trade-mark.

3.2.9 Stitches, seams and stitchings.- Unless otherwise specified herein, the stitches, seams and stitching shall conform to Fed. Std. No. 751. When

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T07:24Z
Check the source to verify that this is the current version before use.

two or more methods, seams, or stitch types are given for the same part of an operation, any one of them may be used. The number of stitches per inch shall be 10 to 12.

3.2.10 Tacking and backstitching.- Ends of all seams and stitching produced with 301 stitch type, when not caught in other seams or stitching, shall be back-tacked not less than 1/4 inch. Thread breaks (all stitch types) shall be secured by stitching back of the break not less than 1/2 inch. Skipped stitches or thread breaks (401 stitch type) may be repaired by using 301 stitch type.

3.3 Design.- The design of the scarfs shall be in accordance with figure 1 for types I and II, and figure 2 for types III and IV.

3.4 Dimensions.- The dimensions of the scarfs shall be as shown in table II (see figures 1 and 2).

TABLE II - Finished measurements

	Measurement (inches)	Tolerance (± inches)
Types I and III (Christian):		
Overall length (including fringe)	98	2
Length of fringe	3-1/2	1/8
Width at end	7-1/2	1/4
Width at middle of scarf	3-3/4	1/4
Length of pleated section (at middle of scarf)	12	1/2
Types II and IV (Jewish):		
Overall length (including fringe)	86	2
Length of fringe:		
For type II	6	1/4
For type IV	3-1/2	1/8
Width at end	9	1/4
Length of patch	2-1/4	1/8
Width of patch	2-1/4	1/8

3.5 Construction.-

3.5.1 Types I and III, Christian.- The fabric for each scarf shall be cut in the warp direction (length). Each scarf shall be made in two sections, each section consisting of two pieces of the specified material. The pieces for each side shall be seamed at the center of the scarf and the seams opened flat. The top side of the scarf shall be pleated for approximately 12 inches on each side of center joining seam, with four folds, hand or machine stitched,

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T07:24Z
Check the source to verify that this is the current version before use.

so that the width shall be in accordance with figure 1. The bottom side of the scarf shall be so patterned that when finished, the dimensions shall be in accordance with figures 1 and 2. The two lengthwise side edges of the sections shall be seamed and the scarf turned. Stitch type 301 or 401, and seam type SSa-1 shall be used. The ends of the scarfs shall be turned in and stitched with stitch type 301, seam type SSc-1. The identification label shall be caught in the closing seam. The fringe shall be attached across the face of each end of the scarf with stitch type 301, seam type LSa-2.

3.5.2 Types II and IV, Jewish.- The fabric for each scarf shall be cut in the warp direction (length). Each scarf shall be made in two sections, each section consisting of a folded piece of the specified material. The sections shall be joined at the center of the scarf and the seam opened flat. The lengthwise edge of the scarf shall be seamed, seam opened flat, and the scarf turned with the seam on the underside at center. Stitch types shall be 301 or 401 and seam type SSa-1. A patch 2-3/4 ± 1/8 inches square, of the same material as the scarf, shall be stitched at each end of the four corners of the scarf, on the underside, with the edges of the patch turned under and stitched with stitch type 301, seam type LSd-1. In the center of the patch, there shall be a 1/8-inch well-worked eyelet through the patch and scarf and made with not less than 20 stitches. The ends of the scarfs shall be turned in and stitched with stitch type 301, seam type SSc-1. The identification label shall be caught in closing seam. The fringe shall be attached across face of each end of scarf with stitch type 301, seam type LSa-2.

3.6 Schiffli embroidery.-

3.6.1 Type I, Christian.- Each scarf shall be machine embroidered on Schiffli type embroidery machines with gold color rayon yarn as follows: The coat of arms of the United States shall be embroidered 3 ± 1/8 inches high by 3 ± 1/8 inches wide and spaced 1/2 ± 1/16 inch above the Christian Chaplain's insignia, which shall be embroidered 4 ± 1/8 inches high by 2-1/2 ± 1/8 inches wide. The width of the cross arms shall be 7/16 ±1/16 inch. The bottom of the insignia shall be 6-1/2 ± 1/4 inches from the end of the scarf, exclusive of fringe.

3.6.2 Type II, Jewish.- Each scarf shall be machine embroidered on Schiffli type embroidery machines with gold color rayon yarn for all details except black for numerals as follows: The coat of arms of the United States shall be embroidered 3 ± 1/8 inches high by 3 ± 1/8 inches wide and spaced 1/2 ± 1/16 inch above the Jewish Chaplain's insignia, which shall be embroidered 4 ± 1/8 inches high by 3 ± 1/8 inches wide. The bottom of the insignia shall be 6-1/2 ± 1/4 inches from the end of the scarf, exclusive of fringe.

3.6.3 Type III, Christian.- Each scarf shall be machine embroidered on Schiffli type embroidery machines with Blue (Cable No. 65010) and Silver Gray (Cable No. 65008) rayon yarn. The U. S. Air Force seal shall be embroidered 4 ± 1/8 inches in diameter and spaced 1/2 ± 1/16 inch below the Christian

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T07:24Z
Check the source to verify that this is the current version before use.

Chaplain's insignia, which shall be embroidered 4 ± 1/8 inches high by 2-1/2 ± 1/8 inches wide. The width of the cross arms shall be 7/16 ± 1/16 inch. The bottom of the Air Force seal shall be 6-1/2 ± 1/2 inches from the end of the scarf, exclusive of fringe. The eagle, wreath, stars, cloud outline, winged thunderbolt, lightning darts and shield outline of the seal shall be Silver Gray (Cable No. 65008). The cross insignia shall be Silver Gray. The background of the cross and seal shall be Blue (Cable No. 65010).

3.6.4 Type IV, Jewish.- Each scarf shall be machine embroidered on Schiffli type embroidery machines with Blue (Cable No. 65010) and Silver Gray (Cable No. 65008) rayon yarn. The U. S. Air Force seal shall be embroidered 4 ± 1/8 inches in diameter and spaced 1/2 ± 1/16 inch below the Jewish Chaplain's insignia, which shall be embroidered 4 ± 1/8 inches high by 3 ± 1/8 inches wide. The bottom of the Air Force shield shall be 6-1/2 ± 1/2 inches from the end of the scarf, exclusive of fringe. The eagle, wreath, stars, cloud outline, winged thunderbolt, lightning darts and shield outline of the seal shall be Silver Gray (Cable No. 65008). The tablet outline, Star of David and numerals shall be Silver Gray (Cable No. 65008). The background of the tablet and seal shall be Blue (Cable No. 65010).

3.7 Pressing and cleaning.- The scarfs shall be well pressed smooth and flat with heated pressing iron or machine. Remove all spots or stains and trim thread ends.

3.8 Workmanship.- The finished scarf shall conform to the quality and grade of product established by this specification.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection.- Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Preproduction sample.- The preproduction sample submitted in accordance with 3.1.3 shall be inspected for defects specified in 4.3.2.1 and 4.3.2.2 for compliance with design, construction, workmanship and dimensional requirements.

4.3 Sampling for inspection.- Sampling for inspection shall be in accordance with the provisions of MIL-STD-105, except where otherwise indicated.

4.3.1 Component and material inspection.- In accordance with 4.1 above, components and materials shall be tested in accordance with all the requirements of referenced specifications, drawings and standards unless otherwise

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T07:24Z
Check the source to verify that this is the current version before use.

excluded, amended, modified or qualified in this specification or applicable purchase documents. In addition to the quality assurance testing provisions of the subsidiary specifications, testing of components shall be conducted on components listed in table III for the characteristics shown therein. Where applicable, test methods in the table shall be in accordance with CCC-T-191. When the data in the "Number of determinations per sample unit" column and "Results reported as" column are not specified in the following table, they shall be as required by the applicable test method. For each component, the sample size shall be in accordance with inspection level S-1 of MIL-STD-105 and the acceptable quality level (AQL) shall be 6.5 test failures per hundred units. Requirements for each component are applicable to the sample unit. The lot size and sample unit shall be expressed as follows:

Component	Lot size	Sample unit
Bengaline	Linear yards	1 linear yard
Buckram	Linear yards	1 linear yard
Embroidery yarn	Pounds	1 holder
Bobbin thread	Pounds	1 bobbin
Fringe	Linear yards	1 linear yard

TABLE III - Testing of components

Component	Characteristic	Requirement paragraph	Test method	No. determinations per sample unit	Results reported as
Bengaline	Mat'l Ident. of rayon	3.2.1.1	1500 or 1520 1/	-	-
	Mat'l Ident. of cotton	3.2.1.1	1200 1/	-	-
	Weight, oz/sq.yd.	3.2.1	5041	-	-
	Yarns per inch:				
	Warp	3.2.1	5050	-	-
	Filling	3.2.1	5050	-	-
	Breaking strength:				
	Warp	3.2.1	5100	-	-
	Filling	3.2.1	5100	-	-
	Weave	3.2.1	Visual	1	Pass or fail
	Ply filling yarn	3.2.1.1	Visual	1	Pass or fail
Buckram	Weight, oz/sq.yd.	3.2.7	5041	-	-
	Yarns per inch:				
	Warp and filling	3.2.7	5050	-	-
	Breaking strength:				
	Warp and filling	3.2.7	5100	-	-

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T07:24Z
Check the source to verify that this is the current version before use.

TABLE III - Testing of components Cont'd.

Component	Characteristic	Requirement paragraph	Test method	No. determinations per sample unit	Results reported as
Fringe	Mat'l identification	3.2.3	1500 or 1520 1/	-	-
	Weight/linear yard	3.2.3	4.3.1.2	2	-
	Yarn size (denier)	3.2.3	4021	-	-
Embroidery yarn	Mat'l identification	3.2.5	1500 or 1520 1/	-	-
	Yarn size (denier)	3.2.5	4021	-	-
	Ply	3.2.5	Visual	1	Pass or fail
	Colorfastness to:				
	Wet-dry cleaning	3.2.5	4622	-	-
	Light	3.2.5	4660	-	-
Bobbin	Mat'l ident. of cotton	3.2.6	1200 1/	-	-
	Mat'l ident. of nylon	3.2.6	1530 1/	-	-
	Ply (when cotton yarn used)	3.2.6	Visual	1	Pass or fail
Dyed fabric and fringe	Colorfastness to:				
	Wet-dry cleaning	3.2.3 and 3.2.2.2	4622 and 5622	-	-
	Perspiration	3.2.2.2	5680	-	-
	Crocking	3.2.2.2	5651	-	-
	Light	3.2.3 and 3.2.2.2	4660 and 5660	-	-
	Sulfur content	3.2.2	4.3.1.1 1/	-	Pass or fail

1/ A supplier's certification of compliance will be acceptable for this characteristic.

4.3.1.1 Test for sulfur content.-

4.3.1.1.1 Solution (acid stannous chloride).- Dissolve 100 grams of stannous chloride crystals in 100 ml. of hydrochloric acid (35 percent concentration) and add 50 ml. of distilled water.

4.3.1.1.2 Procedure.- One to 1.5 grams of the finished fabric or fringe, cut into small lengths, shall be used for the test. Place the sample in a test tube of suitable size and cover with stannous chloride solution. Place a filter paper which has been moistened with one drop of 5.0 percent lead acetate solution (made by dissolving 5 grams of reagent grade lead acetate to 100 ml. of distilled water; add a drop of glacial acetic acid to clear up

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T07:24Z
Check the source to verify that this is the current version before use.

if cloudy) over the mouth of the tube (punch needle hole in paper). Heat the test tube slowly over a low flame until the solution is boiling. Solution shall not be boiled for more than 10 to 15 seconds as prolonged boiling will reduce the sensitivity of the test. A brown to black stain appearing on the paper indicates the presence of sulfur.

4.3.1.1.3 Evaluation.- The stained filter paper shall then be compared with that obtained from the standard. If the stained area is equal to or lighter than the standard in the degree of staining, the sample shall be considered satisfactory. If the degree of staining by the sample is in excess of the standard, the sample shall be considered unsatisfactory.

4.3.1.2 Weight.- Two specimens in excess of one yard each shall be selected from each sample unit. The specimens of fringe in the relaxed state shall then be measured and cut to exactly one yard each. While in a standard condition as defined in CCC-T-191, each yard shall be weighed on a balance or scale accurate to 0.01 ounce (a scale or balance graduated in grams may be used and the results converted to ounces). The weight of all specimens shall be averaged to determine the ounces per linear yard to the nearest 0.5 ounces.

4.3.2 Examination of end item.- The classification of defects found during examination shall be in accordance with 4.3.2.1 and 4.3.2.2.

4.3.2.1 Visual examination of end item.- Defects found during this examination shall be classified in accordance with list shown in table IV. The sample unit for this examination shall be one scarf. The inspection levels and acceptable quality levels shall be as shown in 4.3.2.3. The lot size shall be expressed in units of one scarf.

TABLE IV - Classification of defects

Defect	Classification Major	Minor
Fabric:		
Hole, cut or tear; smash, multiple floats or unsightly slubs	X	
Wrong color	X	
Shade bar or streaky 1/	X	
Cutting:		
Bengaline not cut in direction of warp	X	
Shaded parts seriously affecting appearance	X	
Shaded parts not seriously affecting appearance		X
Cleanness:		
Spots or stain 1/	X	
Thread ends not trimmed	X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T07:24Z
Check the source to verify that this is the current version before use.

TABLE IV - Classification of defects (Cont'd)

Defect	Classification Major	Minor
Pressing:		
Burned or scorched	X	
Needle chew:		
Any needle chews	X	
Open seams and raw edges 1/4 inch or more	X	
Open seams and raw edges less than 1/4 inch		X
Seam and stitch type:		
Wrong seam type		X
Wrong stitch type		X
Stitch tension:		
Loose tension, resulting in a loose seam	X	
Tight tension (stitches break when normal strain is applied to seam or stitching)	X	
End of seam or stitching (stitch type 301) when not caught in other seam or stitching, backtacked less than 1/4 inch		X
Thread break stitched back of break less than 1/2 inch		X

NOTE: A thread break not backstitched shall be classified as an open seam. Puckering is evidence of tight tension; when puckering is evident, the inspector shall test the seam by exerting pull in the lengthwise direction of the seam.

Stitches per inch:		
Less than minimum or more than maximum specified:		
- three stitches		X
- four or more	X	

NOTE: To be scored only if the condition exists on major portion of seam.

Buckram:		
Omitted		X
Fringe		
Missing on one or both ends	X	
Wrong color	X	
Cut or tear	X	
Spot or stain 1/	X	
Length of bullion uneven 1/		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T07:24Z
Check the source to verify that this is the current version before use.

TABLE IV - Classification of defects (Cont'd)

Defect	Classification Major	Minor
Embroidery: (Schiffli):		
Omitted or positioned incorrectly	X	
Wrong color or wrong color arrangement	X	
Shift, affecting appearance	X	
Incorrect design	X	
Identification label:		
Missing, incorrect, incomplete, illegible or misplaced		X

1/ Clearly visible at normal inspection distance (three feet).

4.3.2.2 Examination of scarf for defects in dimensions.- Any dimension that is not within the specified tolerance shall be classified as a defect.

4.3.2.3 Inspection levels and acceptable quality levels (AQL's).- The inspection levels and AQL's, expressed in defects per hundred units, shall be as follows:

	Inspection level	AQL Major	AQL Total
For defects applicable to 4.3.2.1	II	2.5	6.5
For defects applicable to 4.3.2.2	S-3	-	4.0

4.3.3 Examination of preparation for delivery requirements.- An examination shall be made to determine that packaging, packing and marking requirements of section 5 of this specification are complied with. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping container fully prepared for delivery with the exception that it need not be sealed. Defects of closure listed below shall be examined on shipping containers fully prepared for delivery. The lot size shall be the number of shipping containers in the end item inspection lot. The inspection level shall be S-2 and the AQL shall be 2.5 defects per hundred units.

Examine	Defect
Marking (exterior and interior)	Omitted, incorrect, illegible, or improper size, location, sequence or method of application
Materials	Any component missing Any component damaged

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T07:24Z
Check the source to verify that this is the current version before use.

Examine	Defect
Workmanship	Inadequate application of components, such as incomplete closure of container flaps, improper taping, loose strapping or inadequate stapling Bulging or distortion of containers
Content	Number of interior packages per container is more or less than required

5. PREPARATION FOR DELIVERY

5.1 **Packaging.-** Packaging shall be level A or C as specified (see 6.2).

5.1.1 Level A.- Each scarf, with insignia visible, shall be neatly folded to approximately 15 inches in length. Each folded scarf shall be completely wrapped in tissue paper conforming to type I, class 1 of UU-P-553. One wrapped scarf shall be placed in a set-up paperboard box conforming to type I, variety 1, class A, style 4 of PPP-B-676. Each box shall be provided with thumb notches. Inside dimensions of each interior box shall be as specified in table V. Closure shall be in accordance with the appendix of the box specification (see 6.4).

5.1.2 Level C.- Each scarf shall be packaged to afford adequate protection against damage during shipment from the supply source to the first receiving activity. The supplier may use his standard practice when it meets this requirement.

5.2 Packing.- Packing shall be level A, B, or C as specified (see 6.2).

5.2.1 Level A.- Forty-five scarfs of one type only, packaged as specified in 5.1, shall be packed in a fiberboard shipping container conforming to style RSC, V3c or V3s of PPP-B-636. Alternatively, shipping containers shall conform to style RSC, V15c of MIL-B-43291. Level A packages shall be packed flat, three in length, one in width, and fifteen in depth within a shipping container. Inside dimensions of each shipping container shall be approximately as specified in table V. Each container shall be waterproofed in accordance with the appendix of PPP-B-636. Each shipping container shall be closed and reinforced with flat steel strapping or tape banding in accordance with the appendix of the applicable container specification.

TABLE V - Inside dimensions of interior box and shipping container

Type	Interior box (inches)	Shipping container (inches) 1/
I and III	15 x 7-1/2 x 3/4	23-3/4 x 15-1/2 x 13-1/2
II and IV	15 x 9 x 3/4	28-1/4 x 15-1/2 x 13-1/2

1/ Approximate dimensions are furnished as a guide only.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T07:24Z
Check the source to verify that this is the current version before use.

5.2.2 Level B.- Forty-five scarfs of one type only, packaged as specified in 5.1, shall be packed in a fiberboard shipping container conforming to style RSC, type CF or SF, class domestic, variety SW, grade 200 of PPP-B-636. Level A packages shall be packed flat, three in length, one in width, and fifteen in depth within a shipping container. Inside dimensions of each shipping container shall be approximately as specified in table V. Each shipping container shall be closed in accordance with method II of the appendix of the container specification.

5.2.2.1 When specified, shipping containers shall be fabricated from W5c or W5s fiberboard (see 6.2).

5.2.3 Level C.- Scarfs, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. Containers shall be in accordance with rules or regulations of carriers applicable to the mode of transportation.

5.3 Marking.- In addition to any special marking required by the contract or order, interior packages and shipping containers shall be marked in accordance with MIL-STD-129.

6. NOTES:

6.1 Intended use.- These scarfs are for use by Chaplains of the Department of Defense.

6.2 Ordering data.- Procurement documents should specify the following:

a. Title, number and date of this specification.
b. Type required (see 1.2).
c. Whether preproduction sample is required (see 3.1.3).
d. Selection of applicable levels of packaging and packing (see 5.1 & 5.2).
e. Whether W-board shipping containers are required for level B shipments (see 5.2.2.1).

6.3 Samples.- For access to samples, address the procuring office issuing the invitation for bids.

6.4 The method of packaging referred to in 5.1.1 is similar to method III of MIL-P-116.

6.5 Asterisks are not used in this revision to identify changes with respect to the previous issue, due to the extensiveness of the changes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T07:24Z
Check the source to verify that this is the current version before use.

Custodians:

Army - GL
Navy - PE
Air Force - 28

Preparing activity:

Army - GL


Project No. 9925 - 0101

Review activities:

Navy - PE
Air Force - 28
Armed Forces Chaplains Board

Review information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current Federal Supply Classification Listing of DOD Documents.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T07:24Z
Check the source to verify that this is the current version before use.

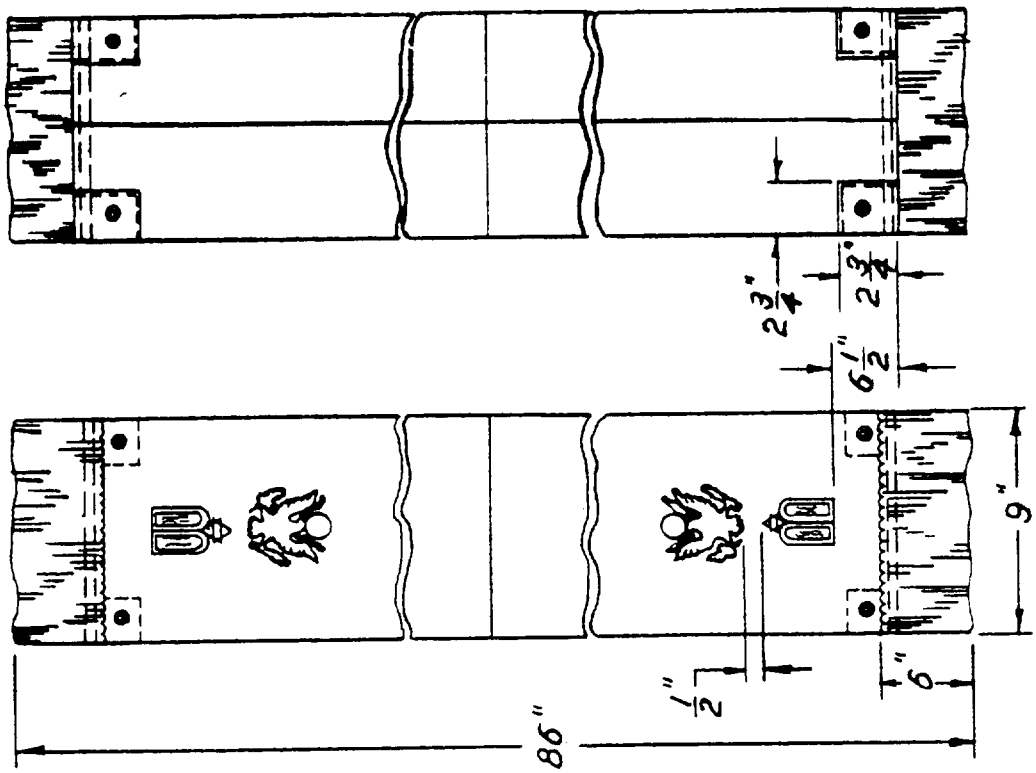

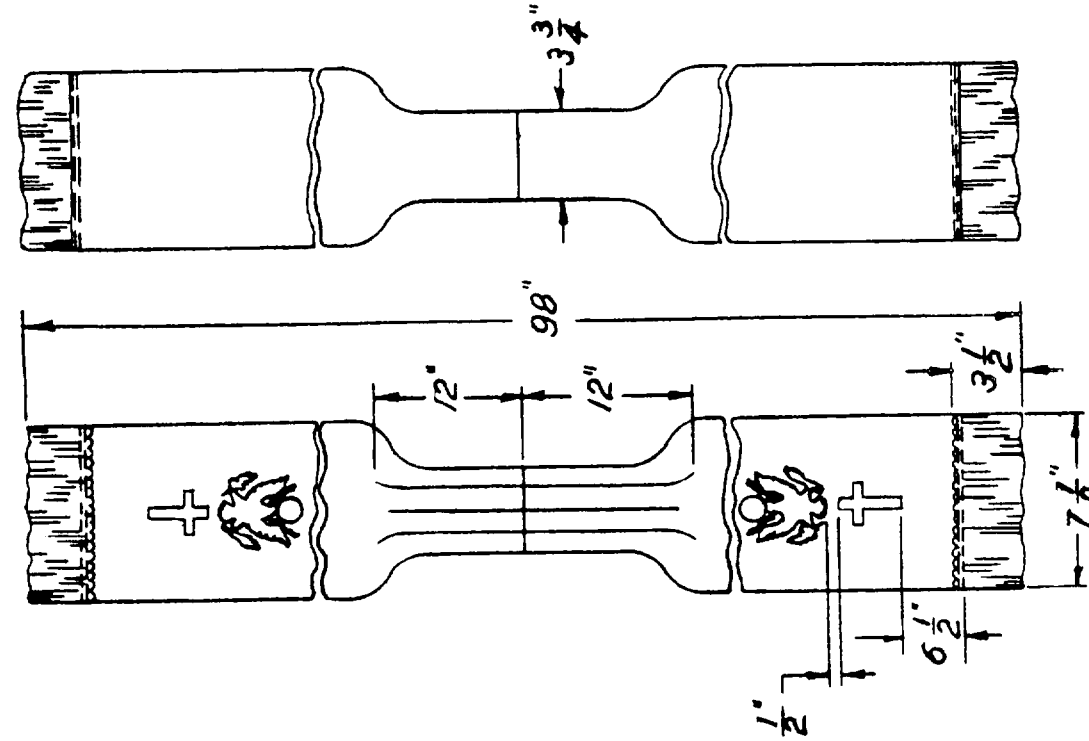


FIGURE 1. SCARFS CHAPLAINS' (ARMY)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T07:24Z
Check the source to verify that this is the current version before use.

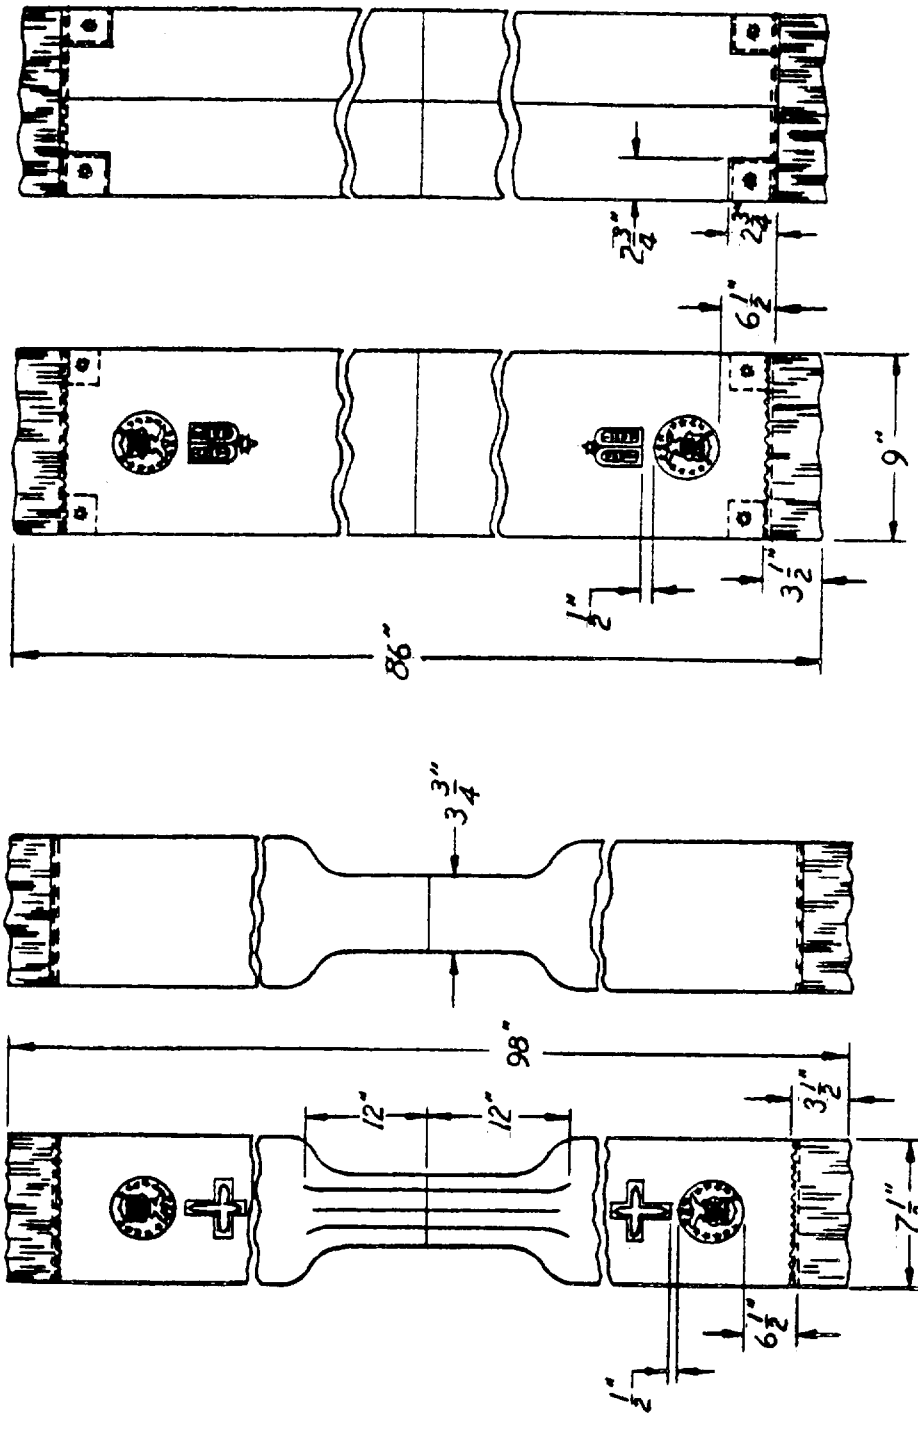


FIGURE 2. SCARFS, CHAPLAINS' (AIR FORCE)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T07:24Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 119-R004

INSTRUCTIONS

This sheet is to be filled out by personnel either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity.

SPECIFICATION

Scarfs, Chaplains' MIL-S-422B

ORGANIZATION	CITY AND STATE

CONTRACT NO.	QUANTITY OF ITEMS PROCURED	DOLLAR AMOUNT
		$

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO IF "YES", IN WHAT WAY?

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity)*	DATE

DD FORM 1 OCT 64 1426

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T07:24Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE ARMY
U. S. Army Natick Laboratories
Natick, Massachusetts 01762

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY

OFFICIAL BUSINESS

Commanding General
U. S. Army Natick Laboratories
ATTN: AMXRE-SS
Natick, Massachusetts 01762

FOLD

"to detach this form, cut along this line"

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T07:24Z
Check the source to verify that this is the current version before use.