
MILITARY SPECIFICATION SHEET

CRYSTAL UNIT, QUARTZ, CR-134/U

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the crystal unit described herein shall consist of this specification and the latest issue of MIL-C-3098.

Pertinent characteristics: 18 to 21 MHz; fundamental; noncontrolled; antiresonance.

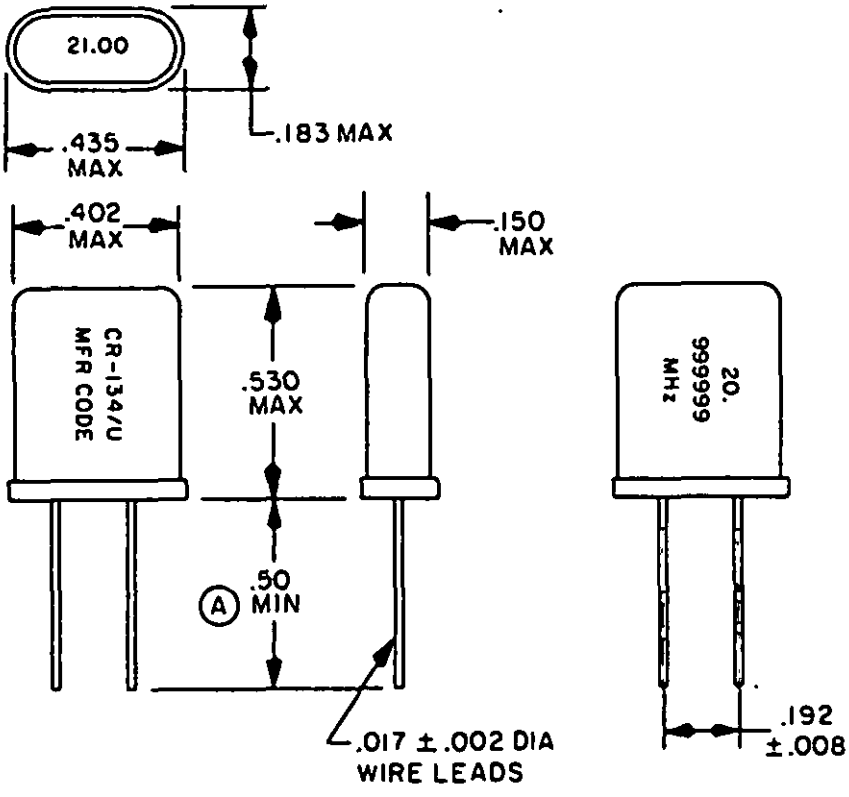

INCHES	MM
.002	.05
.008	.20
.017	.43
.150	3.81
.183	4.65
.192	4.88
.402	10.21
.435	11.05
.50	12.7
.530	13.46

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1 inch = 25.4 mm.
3. The type designator, frequency, and manufacturer's code shall be not less than .038 (.97 mm) in height and not less than .027 (.69 mm) in width.

FIGURE 1. Crystal unit - CR-134/U.

Ⓐ denotes changes

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T16:54Z
Check the source to verify that this is the current version before use.

FSC 5955

Ⓐ TABLE I. Requirements.

Requirement	Specified value or condition
Holder	HC-18/U or HC-43/U (MIL-H-10056/9)
Dimensions, marking, and configuration	See figure 1.
Frequency range	18.0 to 21.0 MHz, inclusive
Capacitance, shunt	6.0 +0.5, -1.0 pF
Mode of oscillation	Fundamental
Frequency tolerances:	
Primary operating temperature range	±25 ppm
Secondary operating temperature range	±50 ppm
Equivalent resistance	20 ohms, maximum
Government reference standard test set	TS-683/TSM
Rated drive level	5.0 ±1.0 mW
Calibration values:	
Equivalent resistance	10 ohms
Resistor voltage drop	0.22 volt
Antiresonance, load capacitance	32.0 ±0.5 pF
Operating temperature ranges	85°C ±1°C
Primary	+10°C to +80°C, inclusive
Secondary	-40°C to +10°C and 80°C to 90°C, inclusive
Shock:	
Frequency change permitted	±5 ppm
Equivalent resistance	±10%
Vibration: 1/	
Frequency change permitted	±5 ppm
Equivalent resistance change permitted	±10%
Thermal shock:	
Frequency change permitted	±5 ppm
Equivalent resistance change permitted	±10%
Aging:	
Frequency change permitted	±5 ppm

1/ Method 204 of MIL-STD-202; test condition A.

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Air Force - 11, 19, 85
DLA - ES

User activities:
Air Force - 17, 84

Agent:
DLA - ES

Preparing activity:
Army - ER

(Project 5955-0623-27)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T16:54Z
Check the source to verify that this is the current version before use.