NOT MEASUREMENT SENSITIVE

MIL-L-11484/183A
10 February 1992
SUPERSEDING
MIL-L-11484/183
1 October 1991

MILITARY SPECIFICATION SHEET

LAPEL BUTTON, JOINT MERITORIOUS UNIT AWARD, DOD

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-L-11484

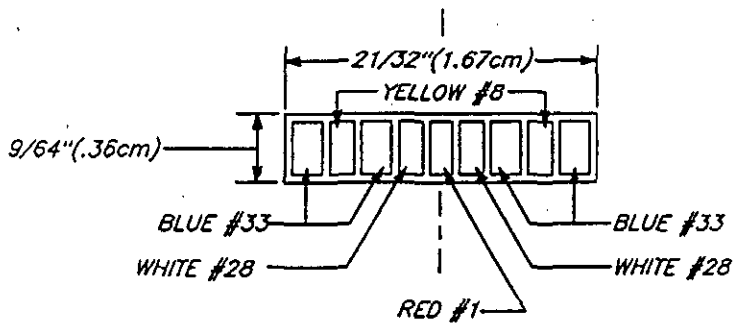

MATERIAL: Gliding Metal

DIMENSIONS:
HEIGHT (Overall): 9/64 inch (0.36 cm) (REF)
WIDTH (Overall): 21/32 inch (1.67 cm) (REF)
THICKNESS: .065 inch ± .005 inch (0.165 cm ± 0.012 cm)

FINISH: Hard Enameled, Gold Plated, Mirror-like Polished

NOTES:
1. The attaching device shall be prong with pick and flat ball clutch type. The prong shall be centered on the reverse side and fused or soldered to the lapel button.

AMSC N/A FSC 8455
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T17:14Z
Check the source to verify that this is the current version before use.

2. Enamel colors shall be as indicated. The color shall conform to the TIOH chip numbers listed below or the standard sample.

COLOR	CHIP NO.
Blue	33
Red	1
White	28
Yellow	8

3. Epoxy resin (stoning epoxy) may be used in lieu of hard enamel at the option of the manufacturer. The epoxy resin shall be a stoning epoxy, have a shore D hardness of 85 and incorporate an ultraviolet inhibitor.

Custodians:
Army - IH
Air Force - 11
Navy - NU

Review activities:
Air Force - 82,99
Navy - MC
DLA - CT

User activities:
Air Force - 45

Preparing activity:
Army - IH

(Project No. 8455-0642)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T17:14Z
Check the source to verify that this is the current version before use.