NOT MEASUREMENT SENSITIVE

MIL-L-11484/185
9 December 1991

MILITARY SPECIFICATION SHEET

LAPEL BUTTON, National Defense Service Medal

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-L-11484.

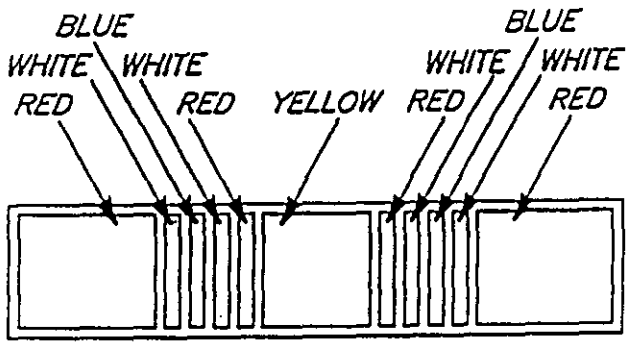

MATERIAL: Gilding metal

DIMENSIONS:
HEIGHT: 9/64 inch (0.36 cm) (REF)
WIDTH: 21/32 inch (1.67 cm) (REF)
THICKNESS: .065 inch ± .005 inch (0.165 cm ± 0.012 cm)

FINISH: Hard enameled, gold plated, mirror-like polished

NOTES:
1. The enameled areas shall be as indicated. The color shall conform to the TIOH chip numbers listed below or the standard sample.

COLOR	CHIP NUMBER
Blue	18
Red	1
White	28
Yellow	31

AMSC N/A FSC 8455
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T17:15Z
Check the source to verify that this is the current version before use.

2. The attaching device shall be prong and pick with wing clutch. The prong shall be centered on the reverse side of the lapel button.
3. Epoxy resin (stoning epoxy) may be used in lieu of hard enamel at the option of the manufacturer. The epoxy resin shall be a stoning epoxy, have a shore D hardness of no less than 85 and incorporate an ultraviolet inhibitor.

Custodian:
Army - IH
Air Force - 11
Navy - NU

Preparing activity:
Army - IH

Review activities:
Air Force - 82,99
Navy - MC
DLA - CT

(Project No. 8455-0636)

User activities:
Air Force - 45

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T17:15Z
Check the source to verify that this is the current version before use.