MILITARY SPECIFICATION SHEET

CONNECTORS, PRINTED CIRCUIT SUBASSEMBLY AND ACCESSORIES
RECEPTACLE, SOCKET CONTACTS, STRAIGHT-THRU, FOR PRINTED WIRING BOARDS (.150 SPACING)

(D)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the connectors described herein shall consist of this document and the latest issue of Specification MIL-C-55302.

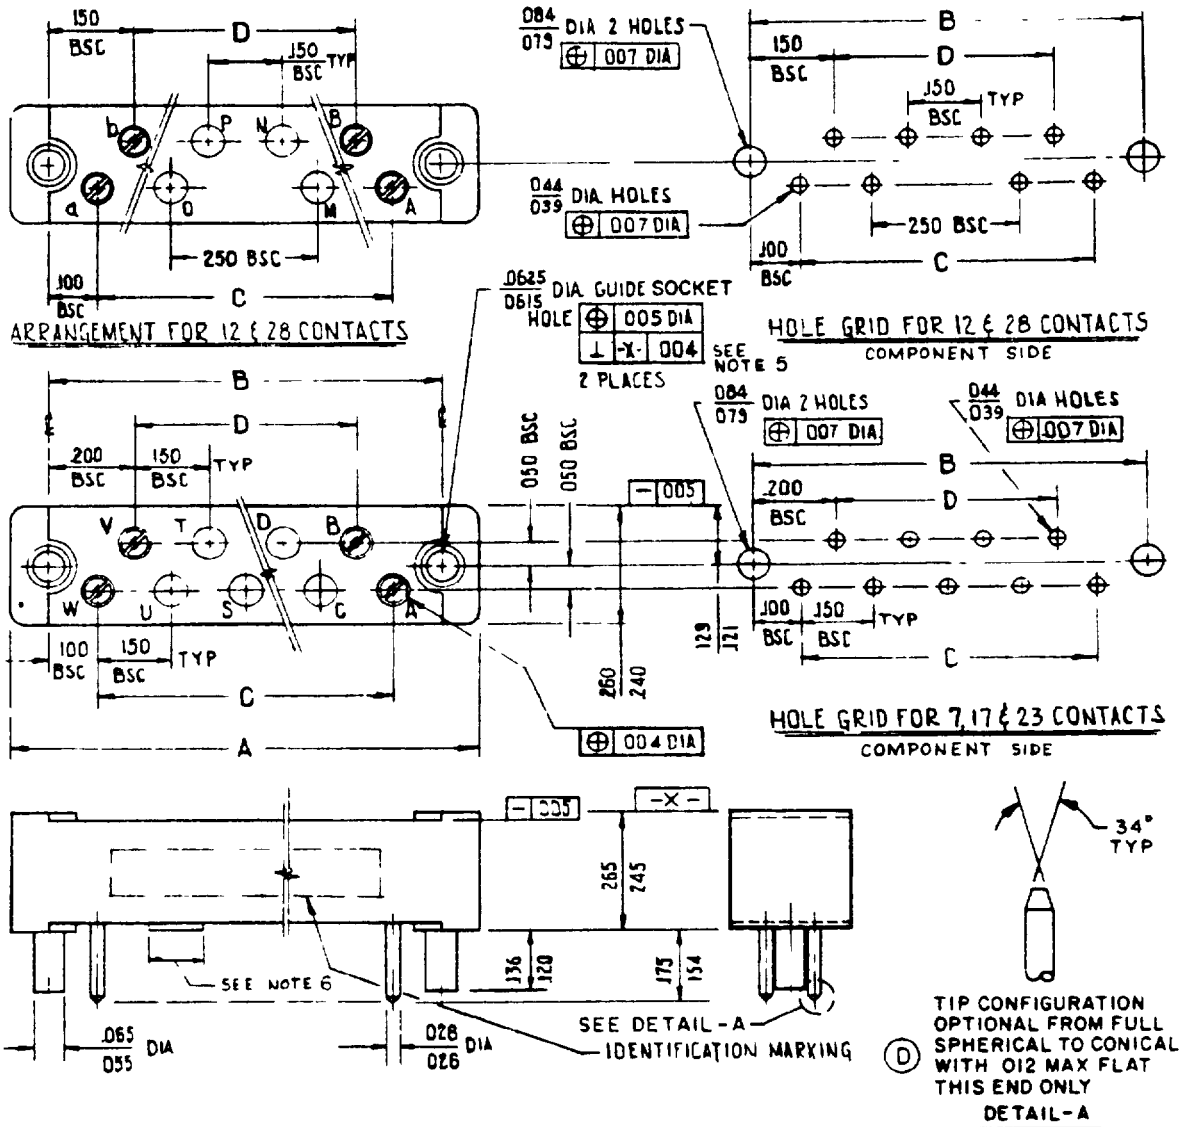



FIGURE 1 Connectors, receptacle (.100 spacing)

FSC 5935

(D) denotes change



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:43Z
Check the source to verify that this is the current version before use.

TABLE I. Dimensions and dash number.

| Dash No. | No. of contacts | A ±.005 | B Basic | C Ref | D Ref |
|---|---|---|---|---|---|
| 01 | 7 | 800 | .650 | .450 | .300 |
| 02 | 12 | 1 200 | 1 050 | .850 | 750 |
| 03 | 17 | 1 550 | 1 400 | 1.200 | 1.050 |
| 04 | 23 | 2 000 | 1 850 | 1 650 | 1 500 |
| 05 | 28 | 2.400 | 2.250 | 2.050 | 1.950 |
| 06 | 77 | 4.150 | 4.000 | 3.800 | 3.700 |

| INCHES | MM | INCHES | MM | INCHES | MM | INCHES | MM | INCHES | MM |
|---|---|---|---|---|---|---|---|---|---|
| .004 | 10 | 0625 | 1.588 | 154 | 3 91 | 650 | 16 51 | 1 850 | 46 99 |
| .005 | 13 | 065 | 1 65 | 175 | 4 45 | 750 | 19.05 | 1 950 | 49 53 |
| .007 | 15 | 079 | 2 01 | 200 | 5 08 | 800 | 20 32 | 2 000 | 50 80 |
| 012 | 30 | 084 | 2.13 | 240 | 6.10 | 850 | 21.59 | 2 050 | 52.07 |
| 026 | 66 | 100 | 2.54 | 245 | 6.22 | 1 050 | 26 67 | 2.250 | 57 15 |
| 028 | 71 | 120 | 3 05 | 250 | 6 35 | 1 200 | 30 48 | 2 400 | 60 96 |
| .039 | .99 | .121 | 3 07 | 260 | 6 60 | 1.400 | 35 56 | 3 700 | 93 98 |
| 044 | 1 12 | 129 | 3 28 | 265 | 6 73 | 1 500 | 38.10 | 3 800 | 96 52 |
| 050 | 1.27 | 136 | 3 45 | 300 | 7 62 | 1 550 | 39 37 | 4 000 | 101 60 |
| .055 | 1 40 | 150 | 3.81 | 450 | 11 43 | 1.650 | 41.91 | 4 150 | 105 41 |
| 0615 | 1.562 | | | | | | | | |

NOTES
1. Dimensions are in inches
2. Metric equivalents are given for general information only and are based upon 1 00 inch = 25.4 mm
3. Unless otherwise specified, tolerances are ± 005 ( 13 mm) on three place decimals and ±2° on angles
4. These connectors mate with connectors specified in MIL-C-55302/1 and MIL-C-55302/3, and are primarily for use with single-sided, double-sided, or multilayered printed wiring boards
5. Positional tolerances of guide pins shall apply at datum plane X
6. Pad(s) suitable for printed circuit board support are required Dimensions and location(s) are optional

FIGURE 1 Connectors, receptacle ( 100 spacing) - Continued



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:43Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

Design and construction
Dimensions and configuration. See figure 1.
Material
Guide sockets and guide bushing Brass composition B, 60,000 to 70,000 PSI tensile, as specified in QQ-W-321, or FC brass as specified in QQ-B-626.
(D) Plating
Guide sockets and guide bushings Gold over copper, type II, class 1, grade C, as specified in MIL-G-45204.
Contact Gold per MIL-G-45204, type II, grade C, Class 1, over nickel plating per QQ-N-290, Class 2, 50 to 150 microinches.
Socket size 23
Wire size 22
Current rating 5 amperes, maximum.
Contact identification Shall be alphabetical and sequential in the pattern indicated, using upper case characters followed by lower case characters.

Mating and unmating The maximum insertion force, in pounds shall not exceed a value equal to .5 times the number of contacts.

Contact engagement and separation force The individual contact withdrawal force shall be .5 ounce minimum when tested with a minimum diameter test pin per MS3197-23X1.

Contact resistance The average resistance of all contact pairs measured shall not exceed .010 ohm, and no individual contact pair shall have a resistance exceeding .020 ohm.

Dielectric withstanding voltage
Sea level 1,000 volts rms, 60 Hz, ac.
High altitude 500 volts rms, 60 Hz, ac.

Part number M55302/2- (dash number from figure 1).

Replacement data The connectors covered by this specification were formerly identified with printed circuits as UPC-150-FS-( ).

Custodians
Army - CR
Navy - EC
Air Force - 17

Review Activities
Army - MI,
Navy - AS
Air Force - 11, 85, 99
DLA - ES

User activities
Army - AT, AV,
Navy - MC, OS, SH
Air Force - 19

Preparing activity
Army - CR

Agent
DLA - ES

(Project 5935-3095-2)



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:43Z
Check the source to verify that this is the current version before use.

# STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS This form is provided to solicit beneficial comments which may improve this document and enhance its use DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government Fold on lines on reverse side staple in corner and send to preparing activity Attach any pertinent data which may be of use in improving this document If there are additional papers attach to form and place both in an envelope addressed to preparing activity A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed

NOTE This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements

DOCUMENT IDENTIFIER (Number) AND TITLE

MIL-C-55302/2D

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

HQ, USA CORADCOM
ATTN DRDCO-CM-DM
Fort Monmouth, NJ 07703

☐ VENDOR ☐ USER ☐ MANUFACTURER

1 ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID RESTRICTIVE LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW

A GIVE PARAGRAPH NUMBER AND WORDING

B RECOMMENDED WORDING CHANGE

C REASON FOR RECOMMENDED CHANGE(S)

2 REMARKS

SUBMITTED BY (Printed or typed name and address — Optional)

TELEPHONE NO

DATE

DD FORM 1 OCT 76 1426

EDITION OF 1 JAN 72 WILL BE USED UNTIL EXHAUSTED

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:43Z
Check the source to verify that this is the current version before use.

FOLD

HQ. USA CORADCOM
ATTN DRDCO-CM-DM
Fort Monmouth NJ 07703

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

POSTAGE AND FEES PAID




HQ USA CORADCOM
ATTN DRDCO CM-DM
Fort Monmouth, NJ 07703

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:43Z
Check the source to verify that this is the current version before use.