INCH-POUND

MIL-T-50340A (AR)
3 November 1992
SUPERSEDING
MIL-T-50340 (MU)
10 November 1969

MILITARY SPECIFICATION

TEST SET SUBASSEMBLY: 11726333 (LINE DRIVER A)

This specification is approved for use by the U.S. Army Armament, Munitions and Chemical Command, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the requirements, examinations and tests for a test set subassembly, hereinafter called line driver A, used in Test Set Subassembly MX-8050/TPM-22, part of Radar Test Set AN/TPM-22 (see 6.1) .

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document, should be addressed to: Commander, U.S. Army ARDEC, ATTN: SMCAR-BAC-S, Picatinny Arsenal, New Jersey 07806-5000 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 4931

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:22Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS

MILITARY

MIL-F-13926	Fire Control Materiel, Manufacture and Inspection, General Specification for
MIL-T-28800	Test Equipment for use with Electrical and Electronic Equipment, General Specification for
MIL-I-45607	Inspection Equipment, Acquisition, Maintenance and Disposition of

STANDARDS

MILITARY

MIL-STD-109	Quality Assurance Terms and Definitions
MIL-STD-810	Environmental Test Methods and Engineering Guidelines

(Unless otherwise indicated, copies of federal and military specifications, standards, and handbooks are available from the Standardization Documents Order Desk, Bldg. 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

2.1.2 Other Government documents, drawings, and publications . The following other Government documents, drawings, and publications form a part of this document to the extent specified herein. Unless otherwise specified, the issues are those cited in the solicitation.

DRAWINGS (see 6.4)

U.S. ARMY ARMAMENT RESEARCH, DEVELOPMENT AND ENGINEERING CENTER (ARDEC)

11726333	-	Line Driver A
12950877	-	Requirements for Soldering Electrical and Electronic Assemblies

SPECIAL PACKAGING INSTRUCTION

PS 11726333	-	Packaging of Line Driver A

(Copies of other Government documents, drawings, and publications required by contractors in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting activity.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:22Z
Check the source to verify that this is the current version before use.

2.2 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Materials. Materials shall be in accordance with the applicable drawings and specifications.

3.2 Components and assemblies. The components and assemblies shall comply with all requirements specified on Drawing 11726333, all associated drawings, and with all requirements specified in applicable specifications and standards . Where applicable, the line driver A shall meet the requirements of MIL-F-13926 as follows:

a. Dimensions and tolerances.

b. Inorganic protective surface finishings.

c. Part identification and marking.

d. Workmanship

3.3 Environmental service conditions.

3.3.1 Vibration. The line driver A shall not suffer damage and shall meet the requirements of 3.4 and 3.5 after exposure to sinusoidal vibrations, in each of three mutually perpendicular axes, as specified in MIL-T-28800 for Type I, Class 3, Style F test equipment.

3.3.2 Shock. The line driver A shall not suffer damage and shall meet the requirements of 3.4 and 3.5 after exposure to a total of 18 impulse shocks consisting of three shock impulses of 15 g’s ± 10%, 11 milliseconds ± 10%, half-sine wave applied in each direction of three mutually perpendicular axes.

3.3.3 Altitude operation. The line driver A shall meet the requirements of 3.4 and 3.5 during and after exposure to barometric pressure encountered at 10,000 feet above sea level (20.6 inches of Hg).

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:22Z
Check the source to verify that this is the current version before use.

3.3.4 Temperature.

3.3.4.1 Operating. The line driver A shall meet the requirements of 3.4 and 3.5 when stabilized thermally at any temperature between +32°F and +131°F.

3.3.4.2 Non-operating (storage). The line driver A shall not suffer permanent damage when subjected to the constant temperature extremes of -60°F for a period of 24 hours and +160°F for a period of 4 hours (after temperature stabilization), and shall meet the requirements of 3.4 and 3.5 when returned to room ambient .

3.3.5 Humidity (non-operating) . The line driver A shall meet the requirements of 3.4 and 3.5 after exposure to an atmosphere with a relative humidity in excess of 95 percent for a period of 10 days.

3.4 Electrical . Each conductor shall be electrically continuous as specified on the schematic diagram.

3.5 Performance. When supplied with the inputs specified in Table I, line driver A shall yield the outputs specified in Table I.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:22Z
Check the source to verify that this is the current version before use.

TABLE I. Input and output characteristics.

REQUIREMENT	CHARACTERISTIC	TERMINALS
Input Voltages		
+5 v	+5.0 ± 0.5 Vdc	P1-14, 15, 16 (+); P1-22, 23, 24 (RET)
-15 v	-15 ± 0.1 Vdc	P1-38, 39, 40 (-); P1-22, 23, 24 (RET)
Input Signals		
PRF or $\overline{\text{PRF}}$	PRF : 20 KHz positive pulse, amplitude 3.9 ± 1.1 V, pulse width approximately 0.5 usec. $\overline{\text{PRF}}$: 20 KHz negative pulse, amplitude from 3.9 ±l.l V level to 0 V and return, pulse width approximately 0.5 usec.	P1-3, 5, 7, 9
Cp	7.5 MHz square wave or sine wave, amplitude 2.4 - 5.2 V peak-to-peak.	P1–1
Output signals Response to PRF	20 KHz positive pulse, amplitude from -0.6 ± 0.2 Vdc level to +1.7 ± 0.4 V and return; pulse width approx 0.5 usec; rise time to 50% point less than 90 ns; into 690-ohm load.	P1-47, 49, 51, 53

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:22Z
Check the source to verify that this is the current version before use.

TABLE I. Input and output characteristics. (continued)

REQUIREMENT	CHARACTERISTIC	TERMINALS
Output signals Response to PRF	20 KHz negative pulse, amplitude from +1.7 ± 0.4 Vdc level to +0.6 ± 0.2 V and return; pulse width approx O .5 usec; fall time to 50% point less than 90 ns; into 690-ohm load.	P1-47, 49, 51, 53
Response to Cp	7.5 Mhz sine wave, amplitude from –0.6 ± 0.2 V to +1.4 ± 0.3V; rise time to 50% point less than 90 ns; into 690-ohm load.	P1-55

NOTE : Outputs at P1-47, 49, 51 and 53 are in response to inputs at P1-9, 7, 5 and 3, respectively.

3.6 First article. When specified in the contract or purchase order (see 6.2), a sample shall be subjected to first article inspection in accordance with the technical provisions herein (see-4.3) .

3.7 Soldering. All soldering shall be in accordance with the requirements of Note 2 of Drawing 12950877.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibilitv for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements (examinations and tests) as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in this specification where such inspections are deemed necessary to ensure supplies and services conform to prescribed requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-04-22T20:22Z
Check the source to verify that this is the current version before use.

4.1.1 Responsibility for compliance. All items shall meet all requirements of Sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling inspection, as part of manufacturing operations, is an acceptable practice to ascertain conformance to requirements, however, this does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to accept defective material.

4.1.2 General Provisions . Unless otherwise specified herein, the provisions of MIL-F-13926 apply and form a part of this specification. Reference shall be made to MIL-STD-109 to define quality assurance terms used herein.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (See 4.3) .

b. Quality conformance inspection (see 4.4) .

c. Special sampling inspection (see 4.5) .

4.2.1 Inspection conditions. Unless otherwise specified, all examinations and tests shall be conducted at the following standard ambient conditions:

a.	Temperature	+50°F to +90°F
b.	Relative humidity	90% RH Max.
c.	Pressure	28 to 32 inches Hg

4.3 First article inspection.

4.3.1 Submission. The contractor shall submit a first article sample as designated by the Contracting Officer for evaluation in accordance with provisions of 4.3.2. The first article sample shall consist of the assemblies, components and test specimens listed below in the quantities indicated.

Name	Drawing	Quantity
Line Driver A	11726333	1

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:22Z
Check the source to verify that this is the current version before use.

4.3.2 Inspections to be performed. As determined by the Government, the first article assemblies, components and test specimens may be subjected to any or all of the examinations and tests specified in this detail specification and be inspected for compliance with any or all requirements of the applicable drawings.

4.3.3 Rejection. If any assembly, component or test specimen fails to comply with any of the applicable requirements, the first article sample shall be rejected. The Government reserves the right to terminate inspection upon any failure of an assembly, component or test specimen to comply with any of the requirements .

4.4 Quality conformance inspection.

4.4.1 Inspection lot formation. The term “inspection lot” is defined as a homogeneous collection of units of product from which a representative sample is drawn or which is inspected 100 percent to determine conformance with applicable requirements. Units of product selected for inspection shall represent only the inspection lot from which they are drawn and shall not be construed to represent any prior or subsequent quantities presented for inspection. Homogeneity shall be considered to exist provided the inspection lot has been produced by one manufacturer, in one unchanged process, using the same materials and methods, in accordance with the same drawings, same drawing revisions, same specifications and same specification revisions. All material submitted for inspection in accordance with this specification shall comply with the homogeneity criteria specified herein, regardless of the type of inspection procedure which is being applied to determine conformance with requirements.

4.4.2 Examinations and tests.

4.4.2.1 Components, ‘assemblies and subassemblies.

a. The contractor’s quality program or detailed inspection plan shall provide assurance of compliance of all characteristics with the applicable drawings and specifications utilizing as a minimum the conformance criteria specified in this document and the Quality Assurance Provisions (QAP) listed in the Technical Data Package (TDP). In the absence of QAPs, the applicable quality assurance provisions of MIL-F-13926 shall apply .

b. Unless otherwise specified herein or provided for in the contract, alternative quality conformance procedures, methods or equipment, such as statistical process control, tool

Source: https://assist.dla.mil -- Downloaded: 202640-22T20:22Z
Check the source to verify that this is the current version before use.

control, other types of sampling plans, etc., may be used by the contractor when they provide, as a minimum, the level of quality assurance required by the provisions herein. Prior to applying such alternative procedures, methods or equipment, the contractor shall describe them in a written proposal submitted to the Government for evaluation (see 6.3). When required, the contractor shall demonstrate that the effectiveness of each proposed alternative is equal to or better than the specified quality conformance provisions(s) herein. In case of dispute as to whether the contractor's proposed alternative(s) provides equivalent assurance, the provisions of this specification shall apply. All approved alternative provisions shall be specifically incorporated into the contractor's quality program or inspection system, as applicable.

4.4.2.2 Final acceptance inspection. Subsequent to first article approval, examinations and tests related to Section 3 herein shall be performed on a single defect (individual characteristic) basis in accordance with the sampling plans specified in 4.4.2.3 and 4.5 herein. Examination and test for packaging and marking shall be in accordance with Section 5 herein. The tabulated classification of defects in 4.4.2.3 shall constitute the minimum inspection to be performed by the contractor after first article approval and prior to Government acceptance or rejection by item or lot.

4.4.2.3 Functional tests. The tests in Table II shall be performed on a 100% basis.

TABLE II. Functional tests (100 percent inspection).

Characteristic	Requirement	Test Procedures
Critical	None	N/A
Major 101. Electrical 102. Performance	 3.4 3.5	 4.7.2 4.7.3
Minor	None	N/A

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:22Z
Check the source to verify that this is the current version before use.

4.5 Special sampling. One line drive A out of the first 50 produced and one out of each 100 produced thereafter shall be selected at random. The sample shall have met the requirements and tests in Table II and shall then meet the requirements and tests in Table III. Unless otherwise specified in the contract, the items shall be returned to the lot upon successful completion of testing.

TABLE III. Special sampling.

Characteristic	Requirement	Test Procedures
Critical	None	N/A
Major 103. Vibration 104. Shock 105. Altitude 106. Temperature 107. Humidity (nonoperating)	 3.3.1 3.3.2 3.3.3 3.3.4 3.3.5	 4.7.1.1 4.7.1.2 4.7.1.3 4.7.1.4 4.7.1.5
Minor	None	N/A

4.5.1 Failure of sample. Should any one item of a special sampling fail to meet any of the specified test requirements, acceptance of the product shall be suspended by the Government until necessary corrections to all production since the last test, as well as to current production has been accomplished in accordance with the provisions of the contract.

4.6 Inspection equipment.

4.6.1 Government-furnished inspection equipment. Where the contract provides for Government-furnished test equipment, supply and maintenante of test equipment shall be in accordance with the applicable requirements of MIL-I-45607.

4.6.2 Contractor-furnished inspection equipment.

4.6.2.1 Government design. Unless otherwise specified in the contract, all inspection equipment identified by drawing number in specifications or QAPs forming a part of the contract shall be supplied by the contractor in accordance with design specified. The contractor may, however, propose alternatives to Government designs for approval in accordance with 6.3.

Source: https://assist.dla.mil -- Downloaded: 202610-22T20:22Z
Check the source to verify that this is the current version before use.

4.6.2.2 Contractor design. The contractor shall design and supply inspection equipment compatible with the "Methods of Inspection" specified in 4.7 of this specification and with the component inspection procedures specified in "Examination" and "Test Facilities" requirements of MIL-F-13926 wherever Government designs are not specified (see 4.6.2.1). Since tolerance of test equipment is normally considered to be within 10 percent of the product tolerance for which it is intended, this inherent error in the test equipment design must be considered as part of the prescribed product tolerance limit. Thus, concept, construction? materials, dimensions, and tolerances used in the design of test equipment shall be so selected and controlled as to ensure that the test equipment will reliably indicate acceptability of a product which does not exceed 90 percent of the prescribed limit and permit positive rejection when nonconforming. Construction shall be such as to facilitate routine calibration of test equipment . Contractor inspection equipment designs shall be submitted for approval in accordance with 6.3.

4.6.2.3 Test equipment. In conjunction with 4.6.2.1 and 4.6.2.2, the standard test equipment listed in Table IV (Test equipment list) shall be utilized in the performance of the applicable test methods of inspection as specified in 4.7.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:22Z
Check the source to verify that this is the current version before use.

TABLE IV. Test equivalent list.

Item Number	Description
1. Power supply	5.0 ± 0.3 Vdc, regulated; ac ripple less than 50 mV peak–to–peak; capacity 300 mA.
2. Power supply	-15 ± O.1 Vdc, regulated; ac ripple less than 50 mV peak-to-peak; capacity 100 mA.
3. Signal generator	7.5 MHz square wave or sine wave, amplitude 5.0 ± 0.2 V peak-to-peak, into 50-ohm load.
4. Pulse generator	20 KHz pulse train; negative-going pulses from +3 Vdc level to O V and return, approximately 0.5 usec pulse width, into 150 ohms; also positive pulses (negations of the above) .
5. Oscilloscope	Dual channel, vertical passband DC to 15 MHz. Rise time of scope plus measuring probe 10 ns or less. Sweep period 50 ns per cm or less. Input resistance greater than 8 megohms. Input capacitance less than 25 picofarads.
6. Test harness	Per Figure 1 and Table V.

TABLE V. Parts list for test harness, (Table IV, Item 6).

DESIGNATION	PART	DESCRIPTION
J1	Connector	Malco 5893232-1, Elco 07-5422-0198–01, or equivalent
R1	Resistor	690 ohms, 1 W, 10%
S1	Switch	SPDT

NOTE : Terminal strip, wire, per Figure 1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:22Z
Check the source to verify that this is the current version before use.

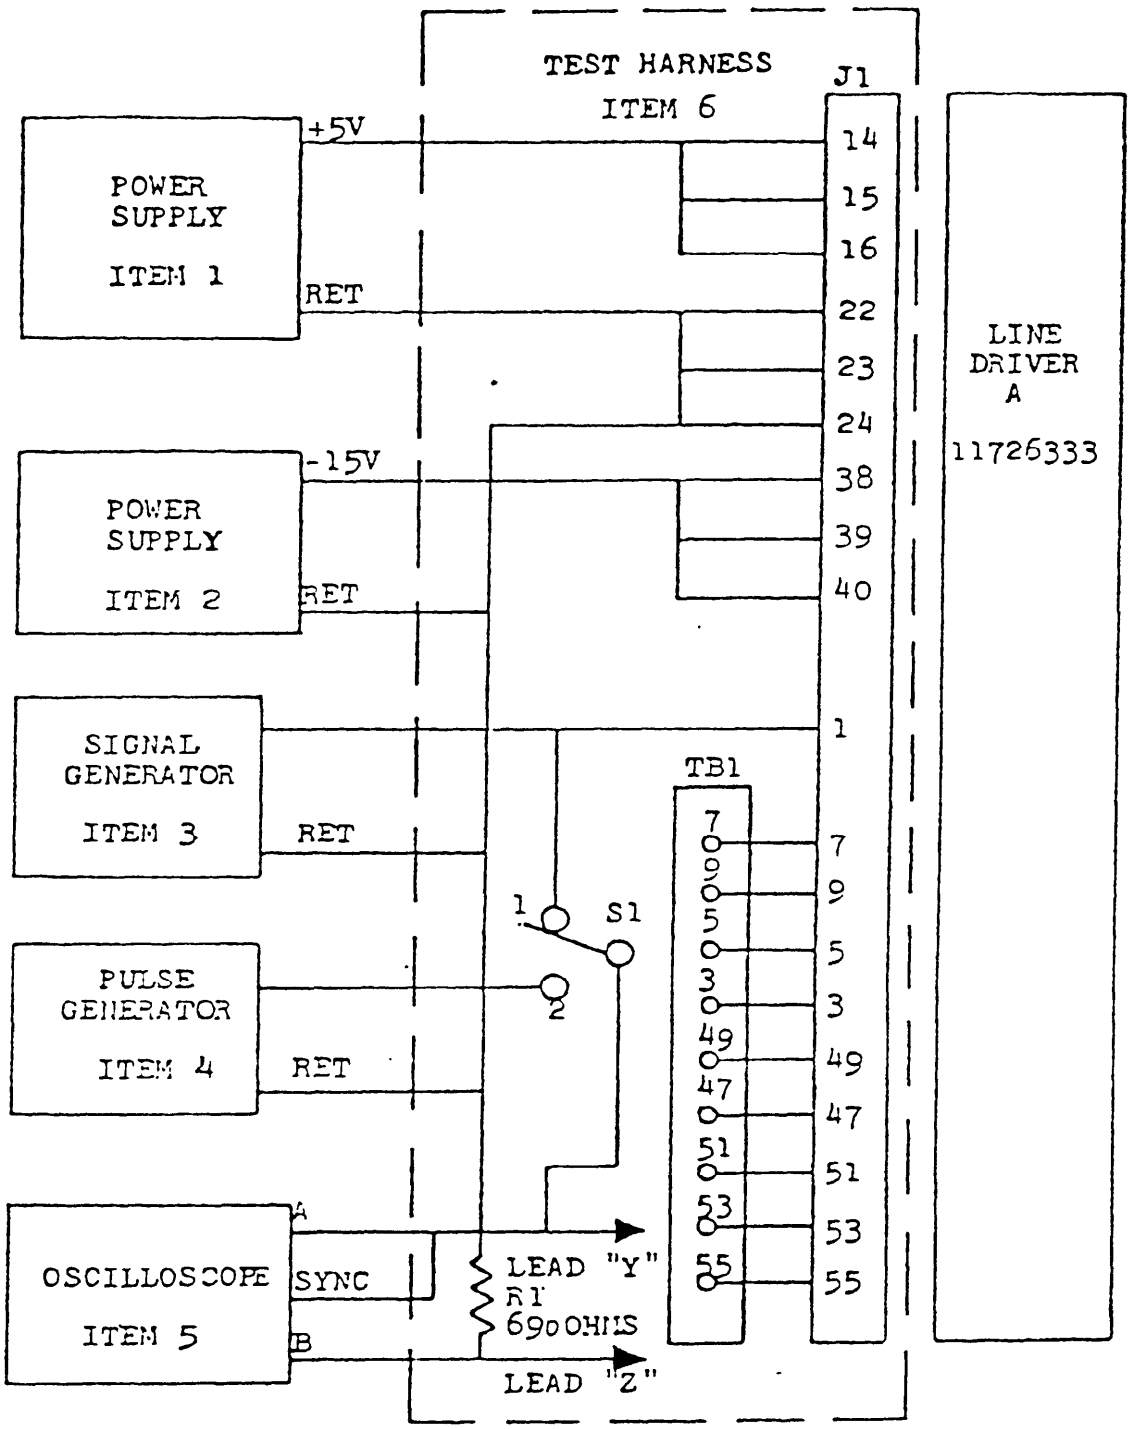


FIGURE 1. Test setup for line driver A.

Source: https://assist.dla.mil -- Downloaded: 202640-22T20:22Z
Check the source to verify that this is the current version before use.

4.7 Methods of inspection.

4.7.1 Environmental. Environmental tests shall be conducted in accordance with the test conditions, general test performance guidance, and individual test methods of MIL-STD-810, except as specified herein. Test facilities, chambers and apparatus used in conducting the tests contained in this specification shall be capable of meeting the conditions required.

4.7.1.1 Vibration. This test shall be performed as specified in MIL-T-28800 for Type I, Class 3, Style F test equipment with the exception that Step 4.c Resonance Dwell does not apply. The line driver A shall be attached to the vibration generator directly or with a fixture, and securely held by its normal means of attachment. After vibration, the line driver A shall be tested as specified in 4.7.2 and 4.7.3 herein to determine compliance with 3.3.1.

4.7.1.2 Shock. This test shall be performed as specified in Procedure I, Section II of Method 516 of MIL-STD-810 except that :

a. The post test functional check (Step 5 of Procedure I) need not be conducted until completion of all shock impulses.

b. The shock pulses shall be 15 g's ± 10% amplitude and 11 ms ± 10% duration.

c. The maximum g shall occur at 5.5 milliseconds ± 10%.

d. The shock measuring system shall have a flat frequency response within ± 10% from 20 to 2,000 hertz .

After the application of all the shock impulses, the line driver A shall be tested as specified in 4.7.2 and 4.7.3 to determine compliance with 3.3.2.

4.7.1.3 Altitude (operating). This test shall be performed as specified in Procedure II, Method 500 of MIL-STD-810. The operational checkout shall be as specified in 4.7.2 and 4.7.3 for compliance with 3.3.3.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:22Z
Check the source to verify that this is the current version before use.

4 .7.1.4 Temperature.

4.7.1.4.1 High (operating and non-operating) This test shall be performed as specified in Procedures I and II, Method 501 of MIL-STD-810 with constant temperature extremes as specified in 3.3.4. The operational checkout shall be as specified in 4.7.2, 4.7.3, for compliance with 3.3.4.

4.7.1.4.2 Low (Operating and non-operating) . This test shall be performed as specified in Procedures I and II, Method 502 of MIL-STD-810 with constant temperature extremes as specified in 3.3.4. The operational checkout shall be as specified in 4.7.2 and 4.7.3 for compliance with 3.3.4.

4.7.1.5 Humidity (non-operating) This test shall be performed in accordance with Procedure III, Method 507 of MIL-STD-810 except that in Step 7, checkout shall be performed at the conclusion of the test only, with the item at standard ambient conditions. The operational checkout shall be as specified in 4.7.2 and 4.7.3 for compliance with 3.3.5.

4.7.2 Electrical. Continuity shall be inspected by standard measuring equipment (see Table II) and visual examination for compliance with 3,4.

4.7.3 Performance. Adjust power supplies (Table IV, Items 1 and 2), signal generator (Table IV, Item 3), and pulse generator (Table IV, Item 4), to deliver the input voltages and input signals specified in Table I, and connect to test harness (Table IV, Item 6) . Turn off test equipment and attach line driver A to test harness connector J1. Turn on test equipment and proceed as follows:

a. Connect A channel of oscilloscope (Table IV, Item 5) as shown in Figure 1.

b. With test harness switch S1 in position 1, monitor input signal Cp on A channel.

c. Connect lead Z (Figure 1) to test harness terminal TB1-55, and verify presence of output called “Response to Cp" in Table 1.

d. Turn test harness switch S1 to position 2.

e. Set pulse generator (Table IV, Item 4) to deliver PRF signal of Table I.

f. Use A channel of oscilloscope to monitor PRF signal .

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:22Z
Check the source to verify that this is the current version before use.

g. Use B channel to verify presence of appropriate output signal of Table I, by making the following connections to test harness terminals:

Lead Y on	Lead Z on
TB1-7	TB1-49
TB1-9	TB1-47
TB1-5	TB1-51
TB1-3	TB1-53

h. Set pulse generator (Table IV, Item 4) to deliver PRF signal of Table I, and repeat steps a through g above.

4.8 Soldering. Soldering processes shall be inspected by certified inspectors to the requirements and acceptance criteria of Note 2 of Drawing 12950877 as specified in paragraph 3.7.

5. PACKAGING

5.1 General. Preservation, packing and marking shall be in accordance with Special Packaging Instruction PS 11726333. The level of protection shall be as specified in the procurement document.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. Line driver A consists of five emitter followers which provide sufficient drive for test signals used in Test Set Subassembly MX-8050/TPM-22. The latter subassembly is used to test printed circuit cards.

6.2 Acquisition requirements. Acquisition documents must specify the following:

a. Title, number and date of this specification

b. Issue of DODISS to be cited in the solicitation, and, if required, the specific issue of individual documents referenced (see 2.1.2) .

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:22Z
Check the source to verify that this is the current version before use.

c. Requirements for submission of first article sample.

d. Applicable stock number.

e. Packaging requirements, if other than specified in Section 5.

f. Serialization requirements, if applicable.

g. Certificate of conformance for each lot or shipment of product.

6.3 Submission of contractor inspection equipment designs for approval. Submit copies of designs as required to: Commander, U.S. Army ARDEC, ATTN: SMCAR-QAF-I, Picatinny Arsenal, NJ 07806–5000. This address will be specified on the Contract Data Requirements List, DD Form 1423 in the contract.

6.4 Drawings. Drawings listed in Section 2 of this specification under the heading U.S. Army Armament, Research, Development and Engineering Center (ARDEC) may also include drawings prepared by, and identified as U.S. Army Armament, Research and Development Command (ARRADCOM), Frankford Arsenal, Rock Island Arsenal or Picatinny Arsenal drawings. Technical data originally prepared by these activities is now under cognizance of ARDEC.

6.5 Subject term (key word) listing.

Emitter Follower
Fire Control System
VADs

6.6 Changes from previous issue. Asterisks (or vertical lines) are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

Custodian:
Army–AR

Preparing activity:
Army-AR

(Project 4931-A269)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:22Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:22Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER	2. DOCUMENT DATE (YYMMDD)
3 DOCUMENT TITLE		

4. NATURE OF CHANGE (Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets if needed.)

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a. NAME	b. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON
c. ADDRESS (Include Zip Code)	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340

Source: https://assist.dla.mil -- Downloaded: 202610-22T20:22Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:22Z
Check the source to verify that this is the current version before use.