INCH-POUND

MS28755C
2 November 1999
SUPERSEDING
MS28755 Rev B
8 August 1985

DETAIL SPECIFICATION SHEET

FITTING END, SELF-SEALING FUEL HOSE, SWIVEL, DETACHABLE, FLANGED, 90°

This specification is approved for use by all Departments and Agencies of the Department of Defense.

TABLE I. Dimensions.

Fitting End Part No.	Tubing/ Hose Size NOM (REF)	Flange Part No.	A Max	B Max	C Min	D Max	E +.000 -.005
MS28755D16	1	MS20756D16	3.891	2.000	.813	1.953	.156
MS28755D20	1 1/4	MS20756D20	4.016	2.000	1.047	2.313	.156
MS28755D24	1 1/2	MS20756D24	4.578	2.000	1.281	2.563	.188
MS28755D32	2	MS20756D32	5.391	2.250	1.750	3.125	.188
MS28755D40	2 1/2	MS20756D40	6.016	2.500	2.219	3.625	.188
MS28755D48	3	MS20756D48	7.281	2.500	2.828	4.438	.188

TABLE I. Dimensions -continued.

Fitting End Part No.	F +.000 -.005	G Max	H Min	J Min	K Max	Weight Lb (Approx)
MS28755D16	1.500	1.188	.375	1.343	1.813	.371
MS28755D20	1.844	1.500	.500	1.656	1.813	.514
MS28755D24	2.125	1.750	.500	1.906	2.313	.848
MS28755D32	2.750	2.375	.625	2.531	2.813	.947
MS28755D40	3.281	2.875	1.000	3.031	3.063	1.466
MS28755D48	3.781	3.375	1.250	3.250	4.313	2.000

AMSC N/A FSC 4730

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:58Z
Check the source to verify that this is the current version before use.

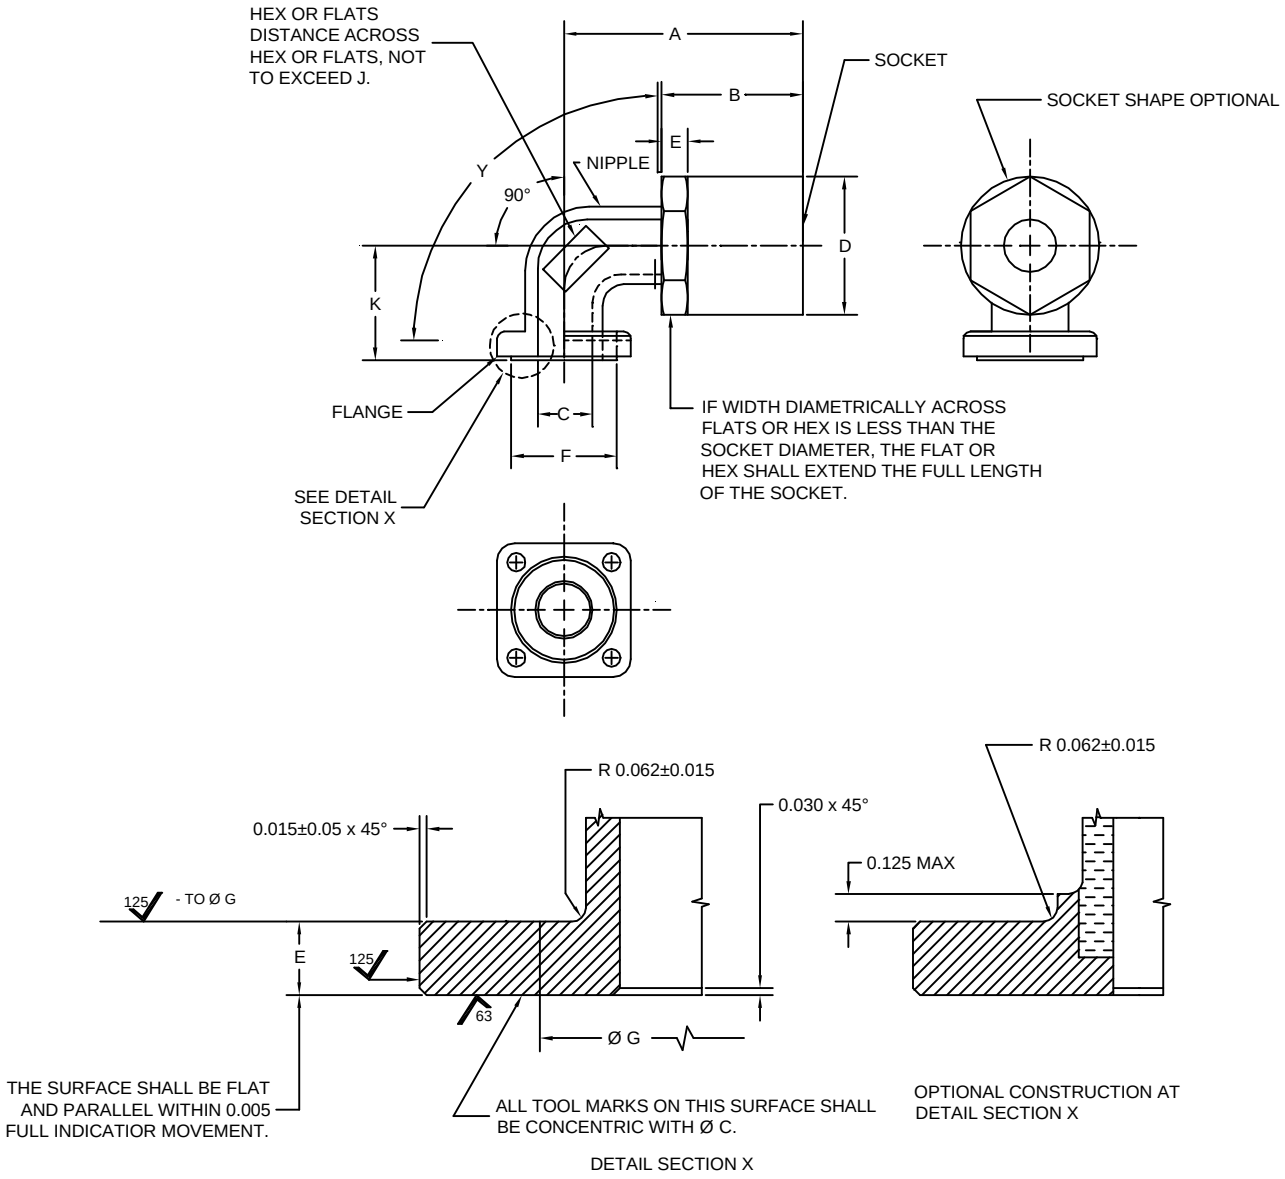

FIGURE 1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:58Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1. Material: Aluminum alloy.

2. Fittings must swivel through 360° with sufficient clearance to allow use of standard wrenches on the nut when the axis of the hose is aligned over the stud or capscrew.

3. Hex or flats shall fit standard wrench openings.

4. The true circular cross section is not required within angle Y, however, a ball .031 smaller in diameter than C must pass through. Nipple ID within angle Y shall not exceed C.

5. Diameters C, F and G shall be concentric within .010 full indicator movement.

6. Surface roughness shall be in accordance with ASME B46.1.

7. Fittings shall be permanently marked with the applicable MS part number on an unfinished surface of the nipple.

8. Remove all burrs and sharp edges. The interior surface of the fitting shall be smooth and free from projections.

NOTES:

1. Dimensions are in inches. Unless otherwise specified, tolerances: decimals ± .010; angles ± 1°.

2. Hex flange MS20756 not shown.

3. Part number: Example of military part number: MS28755D16

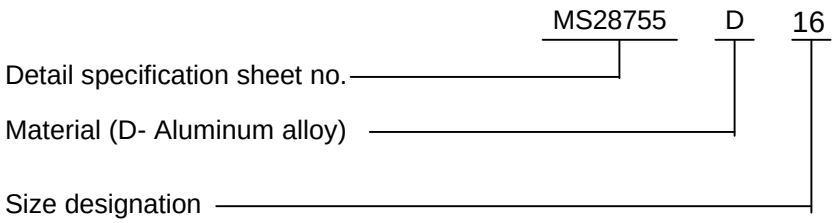

Custodian:
Air Force - 99

Preparing activity:
DLA - CC

(Project 4730-0910)

Review activity:
Air Force - 82

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:58Z
Check the source to verify that this is the current version before use.