[INCH-POUND]
A-A-59309
21 July 1999
SUPERSEDING
MIL-T-26639C
14 March 1969

COMMERCIAL ITEM DESCRIPTION

TESTER, TORQUE WRENCH

The General Services Administration has authorized the use of this commercial item description for all federal agencies.

1. SCOPE. This commercial item description (CID) covers torque wrench testers with mechanical indicating dials for use in test and verification of hand-held torque wrenches of all types.

2. CLASSIFICATION. The torque wrench tester shall be of the following types and sizes. The type and size to be furnished shall be as specified (see 7.2(b)).

Type I - Single station, single range
Type II - Dual station, single range, dual scale
Type III - Single station, dual range or dual station, dual range

Size - See table I

3. SALIENT CHARACTERISTICS

3.1 General requirements. The tester shall be so designed that a 30-degree side-load will not cause any deviation in the torque reading.

3.1.1 Type I torque wrench tester. The type I torque wrench tester shall be a single station tester meeting the torque capacity of the applicable size shown in table I and the requirements specified herein.

3.1.2 Type II torque wrench tester. The type II torque wrench tester shall be a dual station tester meeting the torque capacity of the applicable size shown in table I and the requirements specified herein.

Beneficial comments, recommendations, additions, deletions, clarifications, etc. and any other data which may improve this document should be sent to: Defense Supply Center Richmond (DSCR), ATTN: DSCR-VBD, 8000 Jefferson Davis Highway, Richmond, VA 23297-5610.

AMSC N/A FSC 6635

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:09Z
Check the source to verify that this is the current version before use.

TABLE I. Product classifications.

Size	Type	Torque Range	Dial Increment (maximum)	Drive Size (male)
1	I Single station, single range	0 - 250 inch-pounds	0.25 inch-pound	1/2-inch square
2		0 - 2000 inch-pounds	2 inch-pounds	1/2-inch square
3		0 - 1000 foot-pounds	1 foot-pound	1-inch square
4		0 - 2000 foot-pounds	2 foot-pounds	1-inch square
5	II Single station, single range, dual scale	0 - 50 inch-pounds 0 - 800 inch-ounces	0.1 inch-pound 1 inch-ounce	1/4-inch hexagon
6		0 - 200 foot-pounds 0 - 2400 inch-pounds	0.2 foot-pound 2.5 inch-pounds	1/2-inch square
7		0 - 500 foot-pounds 0 - 6000 inch-pounds	1 foot-pound 6 inch-pounds	3/4-inch square
8	III Single station, dual range or dual station, dual range	0 - 100 inch-ounces 0 - 500 inch-ounces	0.5 inch-ounce 2.0 inch-ounces	1/4-inch hexagon
9		0 - 250 inch-pounds 0 - 2000 inch-pounds	0.25 inch-pound 2 inch-pounds	1/2-inch square

3.1.3 Type III torque wrench tester. The type III torque wrench tester shall be a single station, dual range or dual station, dual range tester meeting the torque capacity of the applicable size shown in table I and the requirements specified herein.

3.2 Components. The torque wrench tester shall include, as a minimum, the following components:

3.2.1 Housing. The mechanism of the tester shall be enclosed in a housing. The housing shall provide a means for bolting the tester to a horizontal or vertical surface. If required (see 7.2(c)), a conversion table shall be provided and attached to single scale testers to convert the dial readings to other units of interest, such as foot-pounds to inch-pounds with the basic units and coverage compatible with the tester as specified. Conversion tables shall be marked in a permanent manner on metal plates.

3.2.2 Drive. Torque wrench tester shall be provided with a drive in accordance with the applicable size listed in table I.

3.2.3 Adapters. The torque wrench tester shall be provided with adapter(s) having female openings on either end in accordance with the applicable size shown in table II.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:09Z
Check the source to verify that this is the current version before use.

TABLE II. Adapter characteristics.

Type	Size	Adapter
I	1	1/2-inch female square to 1/4-inch female square
		1/2-inch female square to 3/8-inch female square
	2	1/2-inch female square to 3/8-inch female double square
		1/2-inch female square to 1/2-inch female double square
	3	1-inch female square to 1-inch female square
		1-inch female square to 3/4-inch female square
	4	1-inch female square to 1-inch female square
II	5	1/4-inch female hex to 1/4-inch female square
		1/4-inch female hex to 3/8-inch female square
	6	1/2-inch female square to 1/2-inch female square
		1/2-inch female square to 3/8-inch female square
	7	3/4-inch female square to 3/4-inch female square
		3/4-inch female square to 1/2-inch female square
III	8	1/4-inch female hex to 1/4-inch female double square
		1/4-inch female hex to 3/8-inch female double square
	9	1/4-inch female square to 1/4-inch female double square
		1/2-inch female square to 3/8-inch female double square
		1/2-inch female square to 1/2-inch female double square

3.2.4 Torque indicator. The torque wrench testers shall be provided with a dial indicator capable of displaying the torque applied to the drive. The dial indicator shall have a dial face, indicating pointer, and protective cover. A means shall be provided for retaining the peak torque applied until manually returned to zero. A zero adjustment shall be provided for the indicator and all scales. The dial increments shall not exceed those shown in table I for the applicable size.

3.2.5 Calibration unit. When specified (see 7.2(d)), the torque wrench tester shall be furnished with equipment for calibration by the dead weight method.

3.3 Performance. Using an independently verified route traceable to National Institute of Standards and Technology (NIST), the tester shall be accurate to within 1 percent of applied load over the range from 20 percent of full scale to 100 percent of full scale. The torque wrench tester sensitivity shall be sufficient to indicate any change in torque equal to 1/2 of a dial graduation. The torque wrench tester shall be capable of withstanding an overload condition of 20 percent beyond maximum capacity without any degradation of accuracy.

3.4 Systems of units. The torque wrench tester shall be marked in U.S. Customary System (USCS) of units with a minimum space of not less than 0.020 inch between scale increments.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:09Z
Check the source to verify that this is the current version before use.

4. REGULATORY REQUIREMENTS

4.1 Recovered materials. The offerer/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR).

4.2 Environmental protection. The item shall meet all applicable Environmental Protection Agency restrictions in effect on the date of the contract. These regulations apply to the emission of materials hazardous to the environment or the user's health and shall be adhered to during the manufacturing, service, transportation, storage, and operation/use of the item.

5. QUALITY ASSURANCE PROVISIONS

5.1 Product conformance. The products provided shall meet the salient characteristics of this commercial item description; conform to the producer's own drawings, specifications, standards, and quality assurance practices; and be the same product as that which the supplier offers for sale on the commercial market. The government reserves the right to require proof of such conformance.

5.1.1 Verification of conformance. The tester shall be calibrated by a method traceable to the NIST and shall be delivered with a calibration certificate or report.

6. PACKAGING

6.1 Preservation, packing and marking. For acquisition purposes, the torque wrench tester supplied shall be preserved, packed, and marked as specified in the contract or order (see 7.2(e)).

7. NOTES

7.1 Sources of documents

7.1.1 FAR. The FAR may be obtained from the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20402-0001.

7.2 Ordering data. Acquisition documents must specify the following information:

a. Title, number, and date of this document
b. Type and size of tester required (see 2)
c. Conversion table, as specified (see 3.2.1)
d. Calibration equipment, if required (see 3.2.5)
e. Packaging requirements (see 6.1)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:09Z
Check the source to verify that this is the current version before use.

7.1 Part identification number (PIN). The following part identification numbering system is for government purposes and does not constitute a requirement for the contractor.

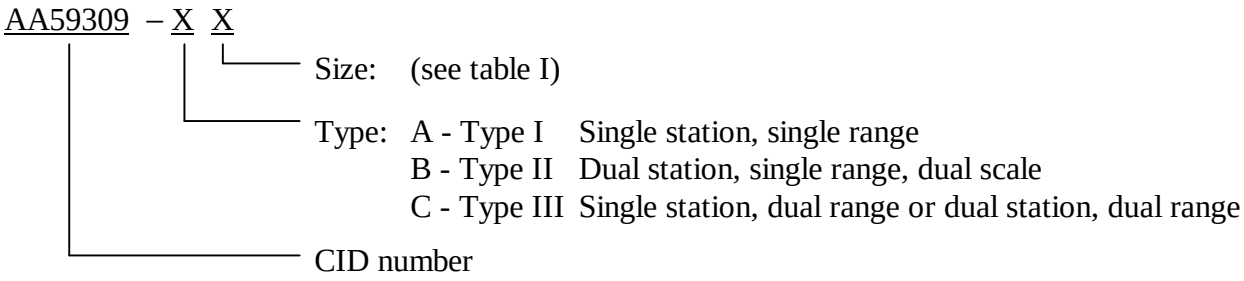

MILITARY INTERESTS:

Custodians:
Air Force - 99
Army - GL
Navy - AS

Reviewers:
Air Force - 82
Army - AV, CE
Navy - MC, OS

CIVIL AGENCY COORDINATING ACTIVITY:

GSA - FCGC

Preparing activity:
DLA - GS

(Project 6635-0177)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:09Z
Check the source to verify that this is the current version before use.