Fed. Std. No. 308B
August 1, 1977
SUPERSEDING
Fed. Std. No. 308A
Nay 9, 1972

FEDERAL STANDARD

INNER TUBE , PNEUMATIC TIRE

This standard was approved by the Commissioner Federal Suppl y Service, General Services Administration for the use of all Federal agencies.

S1 . PURPOSE AND SCOPE. This standard establishes the inner tube and valve combinations and adopts them as standard items for use in pneumatic tires used on ground vehicles in applications, as specified. Its purpose is to achieve greater economy through the reduction of the variety of tube and valve combinations and the identification of applications in which these combinations are used.

S1.1 Tables of standard tube and valve combinations:

Table I. Tubes for passenger car and motorcycle trees.

Table II. Tubes for tires used on trucks, trailers, earth-moving, agricultural and industrial vehicles and on motor scooters.

S2 . APPLICATION . Purchases of inner tubes from commercial sources under Federal Specification ZZ-I-550, Inner Tube, Pneumatic Tire, of the issue in effect on date of invitation for bids shall be limited to items which conform to the characteristics specified in tables I and II for the application shown .

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications and Standards at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U. S. Government Printing Off ice, Washington, DC 20402.

(Single copies of this standard and other Federal Standards required by activities outside the Federal Government for bidding purposes are available without charge from Business Service Centers at the General Services Administration Regional Off Ices in Boston, New York, Washington, DC, Atlanta, Chicago, Kansas City, MC, Fort Worth, Denver, San Francisco, Los Angeles, Seattle, WA, Philadelphia, PA, end Houston, TX.

(Federal Government activities may obtain copies of Federal Specifications, Standards, end Handbooks and the Index of Federal Specifications and Stahdards from established distribution points in their agencies.)

S3. OTHER PUBLICATION. The following documents form a part of this standard to the extent specified herein. Unless a specific issue is identified, the issue in effect on date of invitation for bids or request for proposal shall apply.

The Tire and Rim Association, Inc. Yearbook

(Copies may be obtained from the Tire and Rim Association, Inc. , 3200 W. Market Street, Akron, Ohio 44313.)

S4 . STANDARD CHARACTERISTICS AND ITEM IDENTIFICATION. The standard items with their applicable Federal Stock Numbers shall conform to the characteristics as listed in tables I and II.

S5 . CHANGES . When a Federal agency considers that this standard does not provide for its essential needs, written request for changing or adding to the standard justification shall be submitted in duplicate to the National Automotive Center, Federal Supply Service, General Services Administration, Washington, DC 20406. This justification shall explain wherein the standard does not provide for essential needs. The General Services Administration will determine the appropriate action to be taken and will notify the agency.

S6 . CONFLICT WITH REFERENCED SPECIFICATION. Where the requirements stated in this standard conflict with any requirement in the referenced specification, the requirements of the standard shall apply.

FSC 2610

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:55Z
Check the source to verify that this is the current version before use.

S7 . notes

S7.1 Code to applications column. The tube and valve combination listed in tables I and II are coded to show the application in which they are normally used. The application codes are identified below:

Code	Identification
AA	Agricultural implements
AB	Agricultural and light industrial tractor, steering wheels
AD	Recreational, boat, baggage and special type trailers
AF	Earthmover
AG	Garden tractor
AH	Agricultural and light industrial tractor, drive wheels
AJ	Industrial utility Industrial fork Lift truck slow speed industrial
AL	Light truck, trailer and multipurpose passenger vehicle
AP	Motorcycl e
AQ	Motor scooter
AR	Passenger car
AT	Road grader (DC rim)
AU	Road grader (FB rim)
AW	Heavy Industrial equipment Fork lift truck Mobil crane Loader Dozer Mining car
Ax	Truck-Bus, Trailer Truck-Bus Low platform trailer Straddle truck Mining and logging

S7.2 Valve practice.

S7.2.1 Valve identification. The effective dimensions of valves and valve spuds in finished tubes, as identified to Tire and Rim Association standard designations, are shown in figures 1 to 12.

S7.2.1.1 Other valves. Rim valves used with tubeless tires; valve stems for use with SP-100 and SP-4000 valve spuds; and repair valves; are covered in Federal Specification 22-V-25.

S7.2.1.2 Special valve characteristics. A comparison of special characteristics for valves used on passenger car, light truck, agricultural and industrial tubes is shown below.

Tr. No.	Valve stem material	Type	Max. inflation pressure
13 l *	Rubber	Air	60 p.S. i.
13CW** l	Rubber	Air-water	100 p.s. i.
15	Rubber	Air	60 p.S. i.
15CW	Rubber	Air-water	100 p.s. i.
87 l *	Metal	Air	100 p.s. i.
l 87A**	Rubber	Air	60 p.s. i.
87 S""	Metal	Air	100 p.s. i.
l 135	Rubber	Air	100 p.s.i.
l 150	Rubber	Air	60 p.s. i.
l 150CW	Rubber	Air-water	100 p.s.i.
218A	Metal	Air-water	
2 20A	Metal	Air-water	

l Hand bendable.
** Use TR B-6 Bushing (figure No. 6) in rims with .625 diameter valve hole.

S7.2.2 Industry standard

S7.2.2.1 Tractor and implement tubes. The industry has adopted standard valves for tractor and implement tubes. These are the TR 218A valves for rear tractor and large implement tubes; the TR 15CW

Source: https://assist.dla.mil -- Downloaded: 2026l0-26T12:55Z
Check the source to verify that this is the current version before use.

valves for front tractor and inplement tubes; the TR 13CW for sizes where the valve hole in the rim is small; the TR 135, TR 150, and TR 150CW valves where a bent valve is required in small rim diameters; and the TR 87 (bent), TR 87S (straight) , and TR 87A (hand bendable) , where a valve stem is desired to f it through a small valve hole in small diameter rims. The TR 220A is longer than the TR 218A and is used on selected tube sizes.

All of the above valves except TR 87, TR 87A, TR 87S, TR 135, and TR 150 are of the air-water type design for use with calcium chloride solution or water at the option of the user.

S7.2.2.2 Industrial tire tubes. The CW valve is also fitted to tubes used in industrial applications where added weight (liquid in tube) or higher inflation pressures (60-100 p.s .1.) are required

S7. 3 Valve designation. Valves with air-water and higher inflation pressure capabilities have been specified in this standard where appropriate in order to reduce inventory complexities, as these valves are also appropriate for any use application where less than 60 p.s. i. is required.

S7.4 Tube size designation. Because manuf acturing practices vary and individual manuf acturers vary their marking pattern as dictated by their market, tubes in tables I and II may not be size marked exactly as shown in column 1 of the table or they may be marked to fit more than one tire size Where a tube size is listed and column 3 shows that this same tube can also fit another size tire, the size designation as shown in column I is the designation used by most manufacturers.

Example No. 1. PASSENGER TIRE TUBES , TABLE 1. Tubes for passenger car tires are size marked by tube group size (see note (1) page 6). Tube group size is designated alphanumerically by most manufacturers as shown in Table I. A numerical designation has recently been developed using four numerals. When tune group size is designated numerically, the first two numerals represent the nominal rim diameter followed by two numerals representing sectional diameter as follows: The tube group size shown as F-13 would be size marked 1305, the G-13 would be size marked 1307, etc. The tube supplied with a numerical designation is designed to f it, as a minimum, each of the tire sizes shown in the column titled "Fits tire sizes" on the appropriate line.

Example No. 2. O n Line 1, page 11, the tube size is shown as 6. 90/6. 00-9. In column 3, the table shows that this tube will fit tire sizes 6.00-9 and 6.90-9. The industry trend is to size mark the tire 6.90.9 dropping the old 6.00 size designation; however, tires with the 6. 90/6 .00-9 designation are still in service. The tube marked as shown in column 1 will fit a 6.00-9, 6.90-9, or a 6.90/6 .00-9 size marked tire.

Example No. 3. O n line 13, page 11, the tube size is shown as 7/8-17.5. In column 3, the table shows that this tube will fit a 7-17.5 or an 8-17.5 size tire. This is industry practice. The 7-17.5 and 8-17.5 tires are separate sizes but the tube marked as shown in column 1 will fit either size tire.

Example No. 4. On line 14, page 19, the tube size is shown as 12.4-38. In column 3, the table shows that this tube will also fit an 11-38 size tire. In actual practice the tube may be marked 12.4-38 (11-38) , 12.4/11-38, or 12.4-38. The industry trend is to size mark the tire 12.4-38 and a tube marked as shown in column 1 will f it a 12.4-38 or an 11-38 size tire.

Example No. 5. On line 19, page 25, the tube size is shown as 29.5-35. In column 3, the table shows that this tube will also fit a 33.25-35 size tire. This is industry practice. The 29.5-35 and 33.25-35 tires are separate sizes but the tube marked as shown in column 1 will fit either size tire.

S7. 5 Numerical index of National stock numbers. A numerical listing of National stock numbers identified to tube size and valve combinations listed in this standard is shown in Appendix A (see page 29).

Orders for this publication are to be placed with General Administration, acting as an agent for the Superintendent of Documents. Single copies of this standard are available without charge at the GSA Business Service Centers in Boston, New York, Atlanta, Chicago, Kansas City, MO, Fort Worth, Denver, San Francisco, Los Angeles, Seattle, WA, Philadelphia, PA, and Houston, TX. Additional copies may be purchased for 25 cents each from the General Services Administration, Specif ications Activity, Printed Materials Supply Division Building 197, Naval Weapons Plant, Washington, DC 20407.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:55Z
Check the source to verify that this is the current version before use.

Table I. Tubes for passenger car and motorcycle tires
(passenger car tires) AR

(1) Tube group size	(3) TR valve	Fits tire sizes	NSN 2610-00-	Other applications (see S7.1)	Replaces NSN's-2610-00-
F-13	13	5.20-13, 5.60-13, 6.00-13	729-4583		
G-13	13	5.90-13, 6.40-13, 6.50-13	729-4589	AD	
K-13	13	6.70-13, 7.00-13	088-9292	AL	
F-14	13	5.00-14, 5.20-14, 5.60-14 5.90-14, 6.00-14, 6.45-14	177-6891		
G-14	13	6.40-14, 6.50-14, 6.95-14	177-6892		
K-14	13	7.00-14, 7.34-14, 7.50-14 7.75-14	061-0501	AD, AL	729-4590, 889-9110
M-14	13	8.00-14, 8.25-14, 8.50-14, 8.55-14	729-4575		729-4574
P-14	13	8.85-14, 9.00-14, 9.50-14	729-4572		
G-15	13	5.50-15, 5.90-15, 6.00-15, 6.40-15, 6.50-15, 6.85-15, 7.35-15	051-9182		051-9196, 051-9198
K-15	13	6.70-15, 7.10-15, 7.75-15, 8.15-15, 8.25-15	294-4325	AD	051-9184, 051-9190, 555-6617
M-15	13	7.00-15, 7.50-15, 7.60-15 8.00-15, 8.20-15, 8.45-15, 8.55-15, 8.85-15, 9.00-15, 9.15-15	591-2865		051-9202, 275-7912, 275-7915, 826-2920

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:55Z
Check the source to verify that this is the current version before use.

Table I. Tubes for passenger car and motorcycle tires (passenger car tires) (continued) AR

(1) Tube group size	(3) TR valve	Fits tire sizes	NSN 2610-00-	Other applications (see S7.1)	Replaces NSN's-2610-00-
8.90-15	13	8.90-15	266-6650		204-4903
G-16	15	5.50-16, 6.00-16	555-6615		275-7913, 528-7778, 528-7779, 554-1259
K-16	15	6.50-16, 6.70-16, 7.00-16, 7.60-16	555-6614		172-9832, 889-9111, 554-1265, 275-7911, 294-4316
M-16	15	7.50-16, 8.20-16, 8.25-16	555-6611		051-9258

(2) (Motorcycle tires) AP

(1) Tube group size	(3) TR valve	Fits tire sizes	(4) Valve location Off	(4) Valve location On	NSN 2610-00-	Replaces NSN's-2610-00
V18-19	4	3.25-18, 3.50-18, 3.25-19, 3.50-19, 3.75-19, MM90-19		X	294-4321	540-5871
	13			X	051-9330	
W18-19	13	4.00-18, 4.25-18, 4.50-18, 4.00-19		X	051-9334	294-4300, 275-7917
5.10-16	13	5.00-16, 5.10-16	X		051-9234	
	15		X		424-9920	

(1) Tube group size designation is the designation of an individual tube. The tube is designed to properly fit each of the tire sizes shown in the column titled "Fits tire sizes" (see S7.4).
(2) Motor scooter tires use tubes as listed in table II.
(3) Valve location off centerline of tube.
(4) Valve location related to centerline of tube.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:55Z
Check the source to verify that this is the current version before use.

Table II

Tubes for tires used on trucks, trailers, earthmoving, agricultural and industrial vehicles and on motor scooters

(1) Tube size	TR valve	(1) Also fits tire sizes	(2) Valve location Off	(2) Valve location On	NSN 2610-00-	Normal applications (see S7.1)	Replaces NSN's-2610-00-
2.50-4					Use 2.80/2.50-4		
2.80/2.50-4	87	2.50-4		X	764-4421	AJ	
	87A	2.80-4		X	051-9100	AJ	
	87S			X	424-9874	AJ	
3.00-5					Use 3.40/3.00-5		
3.00-7					Use 3.40/3.00-7		
3.00-12					Use 3.50-12		
3.40/3.00-5	87	3.00-5	X		051-9110	AJ	
	87A	3.40-5	X		424-9875	AJ	
	87S		X		424-9876	AJ	
3.40/3.00-7	87	3.00-7 3.40-7		X	051-9120		204-3132, 269-7761
3.50-4					Use 4.10/3.50-4		
3.50-5					Use 4.10/3.50-5		
3.50-6					Use 4.10/3.50-6		
3.50-12	15CW	3.00-12	X		528-7771	AA	528-7726
4-19	15CW				Use 4.00-19		

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:55Z
Check the source to verify that this is the current version before use.

Table II (cont.)

Tubes for tires used on trucks, trailers, earthmoving, agricultural and industrial vehicles and on motor scooters

(1) Tube size	TR valve	(1) Also fits tire sizes	(2) Valve location Off	(2) Valve location On	NSN 2610-00-	Normal applications (see S7.1)	Replaces NSN's-2610-00-
4.00-7					Use 4.80/4.00-7		
4.00-8					Use 4.80/4.00-8		
4.00-9	13			X	269-7364	AA	
4.00-12	15CW			X	528-7772	AA, AB	260-7337, 269-7355
4.00-15	15CW			X	260-7338	AA, AB	269-7403
4.00-18	15CW			X	528-7774	AA	269-7759
4.00-19	15CW	4-19		X	269-7758	AB	
4.00-36	15CW			X	528-7775	AA	554-4389
4.10/3.50-4	87	3.50-4		X	061-0500	AG	
	87A	4.10-4		X	721-7279	AJ, AQ	
	87S			X	165-3905	AJ, AQ	
4.10/3.50-5	13	3.50-5		X	529-8660	AQ	
	87	4.10-5		X	269-7353	AJ, AQ	
	87A			X	721-9293	AJ, AQ	
	87S			X	721-9294	AJ, AQ	
4.10/3.50-6	13	3.50-6		X	889-9831	AQ	260-7334
	87	4.10-6		X	051-9114	AG	
	87A			X	424-9877	AD, AJ, AQ	
	87S			X	424-9878	AD, AJ, AQ	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:55Z
Check the source to verify that this is the current version before use.

Table II (cont.)

Tubes for tires used on trucks, trailers, earthmoving, agricultural and industrial vehicles and on motor scooters

(1) Tube Size	TR Valve	(1) Also fits tire sizes	(2) Valve location Off	(2) Valve location On	NSN 2610-00-	Normal applications (see S7.1)	Replaces NSN's-2610-00-
4.30-8					Use 4.80/4.00-8		
4.50-6					Use 5.30/4.50-6		
4.50-7					Use 5.30/4.50-7		
4.50-12					Use 5.30/4.50-12		
4.80/4.00-7		4.00-7					
	87	4.80-7	X		051-9126		
4.80/4.00-8	13CW	4.00-8	X		528-7709	AD, AG, AJ, AQ	898-9754, 051-9138, 580-5884,
4.80/4.00-8	13		X			AD, AG, AJ	804-3306, 528-7764
	87	4.30-8	X		889-9174	AD, AG, AJ, AQ	
	87A	4.80-8	X		104-1778	AD, AJ, AQ	
	87S		X		104-1779	AD, AG, AJ, AQ	
4.80/4.00-9	13CW	4.00-9	X		051-9148	AD, AJ	
4.80/4.00-9	13		X			AD, AJ	
	87A	4.80-9	X		424-9879	AD, AJ	
	87S		X		424-9880	AD, AJ	
4.80/4.00-12	13CW	4.00-12	X		269-7336	AD, AJ	
	87A	4.80-12	X		424-9881	AD, AJ	
	87S		X		424-9882	AD, AJ	
5-8	13CW		X		684-1899	AG	
5-12	15CW		X		528-7702	AG	
5.00-8					Use 5.70/5.00-8		

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:55Z
Check the source to verify that this is the current version before use.

Table II (cont.) Tubes for tires used on trucks, trailers, earthmoving, agricultural and industrial vehicles and on motor scooters

(1) Tube Size	TR Valve	(1) Also fits tire sizes	(2) Valve location Off	(2) Valve location On	NSN 2610-00-	Normal applications (see S7.1)	Replaces NSN's-2610-00-
5.00-15	15CW		X		260-7333	AA, AB	269-7757
5.00-16	15CW		X		294-7640	AA	
5.30/4.50-6	13	4.50-6	X		528-7828	AQ	051-9106
	87	5.30-6	X		089-5996	AG	
	87A		X		721-9301	AD, AJ, AQ	
	87S		X		721-9304	AD, AJ, AQ	
5.30/4.50-7	87	4.50-7 5.30-7	X		051-9130	AA	
5.30/4.50-12	13CW	4.50-12	X		269-7356	AD, AJ, AQ	528-7796
5.30/4.50-12	13		X			AD, AJ	
	87A	5.30-12	X		405-4371	AD, AJ, AQ	
	87S		X		721-9305	AD, AJ, AQ	
5.50-16	15CW		X		528-7757	AA, AB	269-7341, 825-6297
5.70/5.00-8	13CW	5.00-8	X		528-7798	AD, AG, AJ	849-0570, 915-1218
5.70/5.00-8	13		X			AD, AG, AJ	
	87A	5.70-8	X		405-4372	AD, AJ	
	87S		X		405-4369	AD, AG, AJ	
5.90-15	15CW				Use 5.90/6.40-15		
5.90/6.40-15	15CW	5.90-15	X		528-7760	AA	528-7758
5.90/6.40-15	15	6.40-15	X			AA	
6-12	13CW		X		528-7703	AG	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:55Z
Check the source to verify that this is the current version before use.

Table II (cont.) Tubes for tires used on trucks, trailers, earthmoving, agricultural and industrial vehicles and on motor scooters

(1) Tube Size	TR Valve	(1) Also fits tire sizes	(2) Valve location Off	(2) Valve location On	NSN 2610-00-	Normal applications (see S7.1)	Replaces NSN's-2610-00-
6-16	15CW		X		684-1900	AG	
6-30					Use 6.2-30		
6.00-6					Use 6.90/6.00-6		
6.00-9					Use 6.90/6.00-9		
6.00-12					Use 6.90/6.00-12		
6.00-14	13CW		X		061-0498	AB	
6.00-16	15		X		350-9975	AJ, AL	554-1631, 269-7339
	15CW		X		528-7759	AA, AB, AJ	
	135		X		497-6928	AL	
	150		X		900-8636	AL	
6.00-20	15CW				Use 6.00-21		
6.00-21	15CW	6.00-20	X		528-7802	AA	269-7381, 826-2805
6.2-30	218A	6-30	X		528-7641	AA	
6.40-15	15CW				Use 5.90/6.40-15		
6.50-10	15CW		X		528-7783	AD, AJ	350-9974, 526-7803,
6.50-10	15		X			AD, AJ	555-6192
	135		X		489-2554	AD, AJ	

Source: https://assist.dla.mil -- Downloaded: 202640-26T12:55Z
Check the source to verify that this is the current version before use.

Table II (cont.) Tubes for tires used on trucks, trailers, earthmoving, agricultural and industrial vehicles and on motor scooters

(1) Tube Size	TR Valve	(1) Also fits tire sizes	(2) Valve location Off	(2) Valve location On	NSN 2610-00-	Normal applications (see S7.1)	Replaces NSN's-2610-00-
6.50-13	13				Use 6.50-13, Table I		
6.50-16	15		X		269-7373	AL	269-7407
	15CW		X		269-7340	AA, AB	
	135		X		405-4364	AL	
	150		X		269-7377	AL	
6.50-20	460			X		AX	260-7352, 528-7834,
	75A			X	350-1964	AX	269-7380
6.50-36	15CW		X		528-7762	AA	554-1270
6.70/7.10-15	15	6.70-15 7.10-15	X		585-0831	AL	
6.70-15	13CW		X		555-5676	AA	
6.90/6.00-6	87A	6.00-6	X		721-9311	AJ, AQ	
	87S	6.90-6	X		721-9312	AJ, AQ	260-7340
6.90/6.00-9	13CW	6.00-9	X		528-7789	AD, AJ, AQ	269-7354, 269-7365,
	87A	6.90-9	X		889-9158	AD, AJ, AQ	269-7367, 585-1175,
	87S		X		497-6930	AD, AJ, AQ	528-7766
	135		X		089-5997	AJ	
6.90/6.00-12	13CW	6.00-12	X		269-7402	AD, AJ	
	87A	6.90-12	X		721-9313	AD, AJ	
	87S		X		721-9314	AD, AJ	

Source: https://assist.dla.mil -- Downloaded: 2026-02-26T12:55Z
Check the source to verify that this is the current version before use.

Table II (cont.)

Tubes for tires used on trucks, trailers, earthmoving, agricultural and industrial vehicles and on motor scooters

(1) Tube Size	TR Valve	(1) Also fits tire sizes	(2) Valve location Off	(2) Valve location On	NSN 2610-00-	Normal applications (see S7.1)	Replaces NSN's-2610-00-
7-14.5					Use 7/8-14.5		
7/8-14.5	300	7-14.5 8-14.5	X		424-9883	AL	
7-16	15CW		X		528-7705	AA	
7-17.5					Use 7/8-17.5		
7/8-17.5	300	7-17.5 8-17.5	X		729-4570	AL	729-4580, 826-0108
7-22.5	300		X		826-0111		729-4579
7-24	218A				Use 7.2-24		
7.00-10	135		X		424-9884	AD	
7.00-12	75A			X	204-3016	AJ	528-7782, 826-2819, 889-9107
7.00-13	13				Use 7.00-13, Table I		
7.00-14	13 13CW		X		Use K-14, Table I 424-9885	AL (Load Range E)	
7.00-15 DC or SDC	15 15CW 135 150		X X X X		051-9204 405-4375 165-3904 051-9224	AL AB AL AL	528-7731

Source: https://assist.dla.mil -- Downloaded: 202640-26T12:55Z
Check the source to verify that this is the currentversion before use.

Table II (cont.)

Tubes for tires used on trucks, trailers, earthmoving, agricultural and industrial vehicles and on motor scooters

(1) Tube Size	TR Valve	(1) Also fits tire sizes	(2) Valve location Off	(2) Valve location On	NSN 2610-00-	Normal applications (see S7.1)	Replaces NSN's-2610-00-
7.00-15 FB	75A			X	405-4374	AJ, AX	528-7835, 849-4011,
	177A			X	555-5666	AW	881-3324
7.00-16	15		X		269-7332	AL	
	135		X		528-7732	AL	
	150		X		269-7378	AL	
7.00-17	75A			X	051-9306	AX	260-7348, 528-7733, 554-0413, 554-1637
7.00-18	75A			X	269-7343	AX	
7.00-20	75A			X	269-7346	AU, AW, AX	260-7349, 269-7333, 554-1630
7.00-24	75A			X	051-9552	AU	269-7387, 825-7017, 554-1266
7.10-15	15				Use 6.70/7.10-15		
7.2-24	218A	7-24		X	528-7643	AB	
7.5L-15	15CW	7.50L-15	X		424-9886	AB	
7.50-10	75A			X	591-2859	AJ	269-7331, 269-7404, 535-6496,
	15CW		X		569-0817	AB, AD, AJ, AW	702-2862, 882-8666, 889-9828,
	135		X		405-4365	AB, AD, AJ, AW	528-7767
	150CW		X		262-1948	AB, AD, AJ, AW	
7.50-15 DC or SDC	15CW		X		975-4826	AL	889-9827, 702-2858,
	135		X		051-9210	AL	889-9108
	150		X		288-3927	AL	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:55Z
Check the source to verify that this is the current version before use.

Table II (cont.)

Tubes for tires used on trucks, trailers, earthmoving, agricultural and industrial vehicles and on motor scooters

(1) Tube Size	TR Valve	(1) Also fits tire sizes	(2) Valve location Off	(2) Valve location On	NSN 2610-00-	Normal applications (see S7.1)	Replaces NSN's-2610-00-
7.50-15 FB	75A			X	528-7712	AJ, AW, AX	725-1293, 889-9827
	177A			X	269-7329	AJ, AW, AX	
7.50-16	15CW		X		269-7760	AA, AB, AL	051-9260, 277-2915,
	135		X		204-2074	AL	640-3708
	150		X		173-5230	AL	
7.50-17	460			X	260-7346	AX	528-7841
	75A			X		AX	
7.50-18	15CW		X		266-6663	AA, AB	269-7350, 266-6662,
	177A			X	269-7344	AW, AX	554-1639, 544-1261
	461			X		AW, AX	
7.50-20	15CW		X		227-0354	AA, AB	269-7376, 536-3860,
	177A			X	269-7347	AU, AW, AX	061-0495, 900-8635
	461			X		AU, AW, AX	
7.50-24	461			X		AU	051-9558, 269-7388,
	177A			X	260-7364	AU	889-9109
	218A				Use 9.5-24		
7.50-36	15CW				Use 9.5-36		
7.60-15	13CW		X		528-7806	AA	
7.75-14	13				Use K-14, Table I		
7.75-15	13				Use K-15, Table I		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:55Z
Check the source to verify that this is the current version before use.

Table II (cont.)

Tubes for tires used on trucks, trailers, earthmoving, agricultural and industrial vehicles and on motor scooters

(1) Tube Size	TR Valve	(1) Also fits tire sizes	(2) Valve location Off	(2) Valve location On	NSN 2610-00-	Normal applications (see S7.1)	Replaces NSN's-2610-00-
8-14.5					Use 7/8-14.5		
8-17.5					Use 7/8-17.5		
8-19.5					Use 8/9-19.5		
8/9-19.5	300	8-19.5 9-19.5	X		729-4581	AX	
8-22.5					Use 8/9-22.5		
8/9-22.5	300	8-22.5 9-22.5	X		826-0112	AX	729-4576, 729-4577, 826-0113
8-24					Use 8.3-24		
8.00-16.5	15CW 150CW		X X		424-9887 424-9888	AL AL	
8.15-15	77A 462				Use 8.25-15		
8.25-15	77A 462			X X	260-7347	AJ, AW, AX AJ, AW, AX	051-9214
8.25-16	150 461 177A		X	 X X	528-7847 405-4367	AL AL AL	554-0404
8.25-17	77A 462			X X	528-7849	AX AX	

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:55Z
Check the source to verify that this is the current version before use.

Table II (cont.) Tubes for tires used on trucks, trailers, earthmoving, agricultural and industrial vehicles and on motor scooters

(1) Tube Size	TR Valve	(1) Also fits tire sizes	(2) Valve location Off	(2) Valve location On	NSN 2610-00-	Normal applications (see 57.1)	Replaces NSN's-2610-00-
8.25-18	77A			X	405-4376	AW, AX	051-9354
	462			X		AW, AX	
8.25-20	77A			X	528-7850	AW, AX	051-9440, 528-7739,
	462			X		AW, AX	528-7711, 051-9442, 085-7135
8.25-24	77A			X	260-7335	AU	
	462			X		AU	
8.3-24	218A	8-24	X		260-7361	AH	269-7359, 528-7768
8.5L-14	13CW		X		424-9889	AA	
8.75-16.5	15CW		X		424-9890	AL	
	150CW		X		424-9891	AL	
9-16					Use 9.5-16		
9-19.5					Use 8/9-19.5		
9-22.5					Use 8/9-22.5		
9-24					Use 9.5-24		
9-32					Use 9.5-32		
9-36					Use 9.5-36		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:55Z
Check the source to verify that this is the current version before use.

Table II (cont.)

Tubes for tires used on trucks, trailers, earthmoving, agricultural and industrial vehicles and on motor scooters

(1) Tube Size	TR Valve	(1) Also fits tire sizes	(2) Valve location Off	(2) Valve location On	NSN 2610-00-	Normal applications (see S7.1)	Replaces NSN's-2610-00-
9.00-10	15CW		X		405-4373	AB, AD, AJ, AW	262-1949, 269-7335,
	135		X		405-4366	AB, AD, AJ, AW	815-0793, 973-7059
	150CW		X		528-7794	AB, AD, AJ, AW	
9.00-15	175A			X	051-9216	AW, AX	269-7370
	463			X		AW, AX	528-7855
9.00-16	15CW		X		266-6659	AA, AB	051-9268, 894-0366,
	177A			X	051-9266	AL	528-7856, 269-7368,
	461			X		AL	350-1963, 901-9665
9.00-18	175A			X	051-9356	AX	555-6389
	463			X		AX	
9.00-20	175A			X	269-7383	AW, AX	061-0497, 266-6657,
	463			X		AW, AX	350-9976, 900-8637
9.00-24	463			X		AU	
	175A			X	051-9560	AU	051-9566, 052-0002,
	218A		X		555-5669	AA	141-8602, 554-4163
	75A			X		AU	
	460			X		AU	
9.5-16	15CW	9-16	X		528-7644	AA	
	218A		X		424-9892	AH	
9.5-24	218A	7.50-24 9-24	X		260-7353	AH	260-7358, 269-7382
9.5-32	218A	9-32	X		269-7397	AH	528-7645

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:55Z
Check the source to verify that this is the current version before use.

Table II (cont.)

Tubes for tires used on trucks, trailers, earthmoving, agricultural and industrial vehicles and on motor scooters

(1) Tube Size	TR Valve	(1) Also fits tire sizes	(2) Valve location Off	(2) Valve location On	NSN 2610-00-	Normal applications (see S7.1)	Replaces NSN's-2610-00-
9.5-36	15CW	7.50-36	X		818-3621	AA	
	218A	9-36	X		528-7652	AH	
9.5L-14	13CW	9.50L-14	X		424-9893	AA	
9.5L-15	15CW	9.50L-15	X		424-9894	AA, AB	
9.50-16.5	15CW		X		424-9895	AL	
	150CW		X		424-9896	AL	
9.50-20	15CW		X		269-7357	AB	
10-16.5	15CW		X		424-9898	AL	
10-17.5	15CW				Use 10-16.5		
10-22.5	300	10-22.5 10.3-22.5	X		826-0114	AX	729-4578, 826-0115
10-24	218A				Use 11.2-24		
10-28	218A				Use 11.2-28		
10-34	218A				Use 11.2-34		
10-36	218A				Use 11.2-36		
10-38	218A				Use 11.2-38		

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:55Z
Check the source to verify that this is the current version before use.

Table II (cont.)

Tubes for tires used on trucks, trailers, earthmoving, agricultural and industrial vehicles and on motor scooters

(1) Tube Size	TR Valve	(1) Also fits tire sizes	(2) Valve location Off	(2) Valve location On	NSN 2610-00-	Normal applications (see S7.1)	Replaces NSN's-2610-00-
10.3-20	464			X		AX	
	78A			X	529-5739	AX	
10.3-22.5	300				Use 10-22.5		
10.00-15	15CW		X		142-5139	AA	269-7330, 528-7734,
	78A			X	260-7354	AW, AX	051-9218, 293-4860
10.00-16	15CW		X		424-9899	AE	
10.00-18	464			X		AX	
	78A			X	529-5731	AX	
10.00-20	464			X		AW, AX	
	78A			X	260-7345	AW, AX	269-7384
	218A		X		528-7741	AT	
10.00-22	78A			X	260-7342	AX	
10.00-24	464			X		AU, AX	051-9576, 269-7389,
	78A			X	260-7341	AU, AX	529-5738, 555-5681
	218A		X		051-9574	AT	
10.50-18					Use 10.50/11.00-18		
10.50/11.00-18	78A	10.50-18		X	051-9362	AX	051-9360
	464	11.00-18		X		AX	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:55Z
Check the source to verify that this is the current version before use.

Table II (cont.)

Tubes for tires used on trucks, trailers, earthmoving, agricultural and industrial vehicles and on motor scooters

(1) Tube Size	TR Valve	(1) Also fits tire sizes	(2) Valve location Off	(2) Valve location On	NSN 2610-00-	Normal applications (see S7.1)	Replaces NSN's-2610-00-
11x4.00-5	13			X	165-3902	AG	
	87S			X	424-9901	AG	
11-16	15CW				Use 12.4-16		
11-22.5	300				Use 11/12-22.5		
11/12-22.5	300	11-22.5 12-22.5		X	826-0116	AX	729-4585, 729-4586, 826-0117
11-24	218A				Use 12.4-24		
11-24.5	300				Use 11/12-24.5		
11/12-24.5	300	11-24.5 12-24.5		X	826-0119	AX	729-4587, 826-0118, 729-4588
11-26	218A				Use 12.4-26		
11-28	218A				Use 12.4-28		
11-36	218A				Use 12.4-36		
11-38	218A				Use 12.4-38		
11L-14	13CW	11.00L-14		X	424-9902	AA	
11L-15	15CW	11.00L-15		X	424-9903	AA, AB	

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:55Z
Check the source to verify that this is the current version before use.

Table II (cont.) Tubes for tires used on trucks, trailers, earthmoving, agricultural and industrial vehicles and on motor scooters

(1) Tube Size	TR Valve	(1) Also fits tire sizes	(2) Valve location Off	(2) Valve location On	NSN 2610-00-	Normal applications (see S7.1)	Replaces NSN's-2610-00-
11L-16	15CW	11.00L-16	X		424-9904	AA	168-9893
11.00-15	464			X		AX	
	78A			X	555-5678	AX	
11.00-16*	15CW		X		528-7815	AB	
	150CW		X		165-3901	AB	
11.00-18					Use 10.50/11.00-18		
11.00-20	464			X		AW, AX	266-6649, 540-8847
	78A			X	051-9450	AW, AX	
11.00-22	464			X		AX	269-7386, 529-5745
	78A			X	266-6665	AX	
11.00-24	464			X		AX	
	78A			X	051-9578	AX	554-1282
	218A				Use 11.00/12.00-24		
	220A				Use 11.00/12.00-24		
11.00/12.00-24	218A	11.00-24	X		051-9588	AT	051-9580
	220A	12.00-24	X		260-7363	AW	
11.2-24	218A	10-24	X		051-9572	AH	555-6194
11.2-28	218A	10-28	X		260-7359	AH	269-7337

*This tube used when tire is mounted on 6.50H rim. When 11.00-16 tire is mounted on W8 or W10 rims, use 12.4-16 tube.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:55Z
Check the source to verify that this is the current version before use.

Table II (cont.)

Tubes for tires used on trucks, trailers, earthmoving, agricultural and industrial vehicles and on motor scooters

(1) Tube Size	TR Valve	(1) Also fits tire sizes	(2) Valve location Off	(2) Valve location On	NSN 2610-00-	Normal applications (see S7.1)	Replaces NSN's-2610-00-
11.2-34	218A	10-34	X		528-7057	AH	
11.2-36	218A	10-36	X		528-7665	AH	
11.2-38	218A	10-38	X		528-7666	AH	
11.25-24	218A		X		528-7755	AA	
11.25-28	218A		X		424-9906	AA	
12-16.5	15CW		X		424-9907	AL	
12-22.5	300				Use 11/12-22.5		
12-24	218A				Use 13.6-24		
12-24.5	300				Use 11/12-24.5		
12-26	218A				Use 13.6-26		
12-28	218A				Use 13.6-28		
12-36	218A				Use 13.6-36		
12-38	218A				Use 13.6-38		

Source: https://assist.dla.mil -- Downloaded: 202640-26T12:55Z
Check the source to verify that this is the current version before use.

Table II (cont.)

Tubes for tires used on trucks, trailers, earthmoving, agricultural and industrial vehicles and on motor scooters

(1) Tube Size	TR Valve	(1) Also fits tire sizes	(2) Valve location Off	(2) Valve location On	NSN 2610-00-	Normal applications (see S7.1)	Replaces NSN-2610-00-
12.00/20/21	464			X		AF, AW, AX	
	78A			X	051-9454	AF, AW, AX	
12.00-24/25	464			X		AF, AX	
	78A			X	269-7390	AF, AX	
	218A				Use 11.00/12.00-24		
	220A				Use 11.00/12.00-24		
12.00-28	218A				Use 13.6-28		
12.4-16	15CW	11-16, 11.00-16	X		774-9081	AH	
12.4-24	218A	11-24	X		975-4825	AH	555-5674
12.4-26	218A	11-26	X		528-7671	AH	
12.4-28	218A	11-28	X		528-7676	AH	269-7338
12.4-36	218A	11-36	X		555-5673	AH	269-7413
12.4-38	218A	11-38	X		528-7678	AH	204-3195
12.5L-15	15CW	11.00-15	X		424-9908	AA	
12.5L-16	15CW	11.00-16	X		424-9909	AA	
13-24	218A				Use 14.9-24		
13-26	218A				Use 14.9-26		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:55Z
Check the source to verify that this is the current version before use.

Table II (cont.)

Tubes for tires used on trucks, trailers, earthmoving, agricultural and industrial vehicles and on motor scooters

(1) Tube Size	TR Valve	(1) Also fits tire sizes	(2) Valve location Off	(2) Valve location On	NSN 2610-00-	Normal applications (see S7.1)	Replaces NSN's-2610-00-
13-28	218A				Use 14.9-28		
13-30	218A				Use 14.9-30		
13-38	218A				Use 14.9-38		
13.00-20	465			X		AF, AX	529-5753
	179A			X	051-9460	AF, AX	
	220A				Use 13.00/14.00-20		
13.00/14.00-20	220A	13.00-20 14.00-20	X		051-9462	AT	051-9458, 051-9482
13.00-24/25	465			X		AF, AX	529-5755, 269-7422, 529-5756
	179A			X	051-9594	AF, AX	
	220A				Use 13.00/14.00-24		
13.00/14.00-24	220A	13.00-24 14.00-24	X		555-6613	AT, AW	051-9596, 528-7715, 726-2564, 825-7021
13.50-16.1	15CW		X		424-9910	AA	
	218A		X		424-9911	AA	
13.6-24	218A	12-24	X		528-7816	AH	528-7817
13.6-26	218A	12-26	X		528-7681	AH	051-9634
13.6-28	218A	12-28 12.00-28	X		528-7682	AH, AT	

Source: https://assist.dla.mil -- Downloaded: 202640-26T12:55Z
Check the source to verify that this is the current version before use.

Table II (cont.)

Tubes for tires used on trucks, trailers, earthmoving, agricultural and industrial vehicles and on motor scooters

(1) Tube Size	TR Valve	(1) Also fits tire sizes	(2) Valve location Off	(2) Valve location On	NSN 2610-00-	Normal applications (see S7.1)	Replaces NSN's-2610-00-
13.6-36	218A	12-36	X		528-7683	AH	
13.6-38	218A	12-38	X		294-7639	AH	260-7369
13.9-36	218A		X		424-9912	AH	
14L-16A	15CW				Use 14L-16.1		
14L-16.1	15CW	14L-16A	X		476-6461	AA, AB	
14L-16.1	15		X			AA, AB	
14-17.5	15CW		X		424-9913	AL	
14-24	218A				Use 16.9-24		
14-26	218A				Use 16.9-26		
14-28	218A				Use 16.9-28		
14-30	218A				Use 16.9-30		
14-34	218A				Use 16.9-34		
14-38	218A				Use 16.9-38		
14.00-20/21	465			X		AF, AW, AX	051-9466, 051-9468, 900-8639,
	179A			X	051-9464	AF, AW, AX	591-2842, 889-9285, 528-7795
	220A				Use 13.00/14.00-20		

Source: https://assist.dla.mil -- Downloaded: 202640-26T12:55Z
Check the source to verify that this is the current version before use.

Table II (cont.)

Tubes for tires used on trucks, trailers, earthmoving, agricultural and industrial vehicles and on motor scooters

(1) Tube Size	TR Valve	(1) Also fits tire sizes	(2) Valve location Off	(2) Valve location On	NSN 2610-00-	Normal applications (see S7.1)	Replaces NSN's-2610-00-
14.00-24/25	465			X		AF, AW, AX	528-7791, 554-1632, 260-7351
	179A			X	051-9602	AF, AW, AX	
	220A				Use 13.00/14.00-24		
14.9-24	218A	13-24	X		528-7685	AH	051-9584, 051-9600, 825-7021
14.9-26	218A	13-26	X		528-7687	AH	051-9636
14.9-28	218A	13-28	X		269-7342	AH	269-7394
14.9-30	218A	13-30	X		227-0356	AH	
14.9-38	218A	13-38	X		528-7691	AH	
15-16A	220A				Use 18.4-16.1		
15-19.5	70	16.5-19.5	X		403-5740	AX	
15-22.5	70	16.5-22.5	X		424-9914	AX	
15-24	218A				Use 18.4-24		
15-26	218A				Use 18.4-26		
15-28	218A				Use 18.4-28		
15-30	218A				Use 18.4-30		
15-34	218A				Use 18.4-34		

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:55Z
Check the source to verify that this is the current version before use.

Table II (cont.)

Tubes for tires used on trucks, trailers, earthmoving, agricultural and industrial vehicles and on motor scooters

(1) Tube Size	TR Valve	(1) Also fits tire sizes	(2) Valve location Off	(2) Valve location On	NSN 2610-00-	Normal applications (see S7.1)	Replaces NSN's-2610-00-
15.5-25	SP-4000			X	476-6463	AF	
15.5-38	218A		X		528-7831	AH	
16x6.50-8	13		X		499-8025	AG	
	87S		X		424-9915	AG	
16.00-16	218A		X		528-7832		
16.00-20	220A		X		405-4368	AT	528-7717
	SP-4000				Use 16.00-20/21		
16.00-20/21	SP-4000	16.00-20 16.00-21		X	278-0889	AF	051-9472, 051-9474
16.00-21	SP-4000				Use 16.00-20/21		
16.00-24	220A		X		476-6462	AT, AW	
	SP-4000				Use 16.00-24/25		
16.00-24/25	SP-4000	16.00-24 16.00-25		X	051-9610	AF, AW	051-9618, 051-9626, 288-1691, 591-2844
16.00-25	SP-4000				Use 16.00-24/25		
16.5L-16.1	15CW		X		476-6464	AA	
	218A		X		476-6465	AA	
16.5-19.5	70		X		Use 15-19.5	AX	

Source: https://assist.dla.mil -- Downloaded: 202640-26T12:55Z
Check the source to verify that this is the currentversion before use.

Table II (cont.)

Tubes for tires used on trucks, trailers, earthmoving, agricultural and industrial vehicles and on motor scooters

(1) Tube Size	TR Valve	(1) Also fits tire sizes	(2) Valve location Off	(2) Valve location On	NSN 2610-00-	Normal applications (see S7.1)	Replaces NSN's-2610-00-
16.5-22.5	70		X		Use 15-22.5	AX	
16.9-24	218A	14-24	X		528-7829	AH	051-9608, 528-7830
16.9-26	218A	14-26	X		528-7692	AH	
16.9-28	218A	14-28	X		269-7408	AH	260-7366, 269-7398, 528-7693
16.9-30	218A	14-30	X		051-9676	AH	
16.9-34	218A	14-34	X		528-7696	AH	
16.9-38	218A	14-38	X		476-6466	AH	
17.5-25	SP-4000			X	476-6467	AF	
18x9.50-8	13CW 87S		X X		424-9916 424-9917	AG AG	
18-19.5	70		X		476-6468	AX	
18-22.5	70		X		451-1039	AX	
18-26	218A				Use 23.1-26		
18-30	218A				Use 23.1-30		
18-34	218A				Use 23.1-34		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:55Z
Check the source to verify that this is the current version before use.

Table II (cont.)

Tubes for tires used on trucks, trailers, earthmoving, agricultural and industrial vehicles and on motor scooters

(1) Tube Size	TR Valve	(1) Also fits tire sizes	(2) Valve location Off	(2) Valve location On	NSN 2610-00-	Normal applications (see S7.1)	Replaces NSN's-2610-00-
18.00-24	SP-4000				Use 18.00-24/25		
18.00-24/25	SP-4000	18.00-24 18.00-25		X	051-9628	AF, AW	051-9612, 051-9620, 261-8390
18.00-25	SP-4000				Use 18.00-24/25		
18.00-26	218A		X		409-7790	AT	
18.00-32	SP-4000				Use 18.00-32/33		
18.00-32/33	SP-4000	18.00-32 18.00-33		X	529-5759	AF	
18.00-33	SP-4000				Use 18.00-32/33		
18.00-49	SP-4000			X	476-6471	AF	
18.4-16.1 18.4-16.1	220A 218A	15-16A	X X		529-1699	AH AH	
18.4-24	218A	15-24	X		269-7392	AH	061-0499
18.4-26	218A	15-26	X		528-7697	AH	
18.4-28	218A	15-28	X		269-7395	AH	
18.4-30	218A	15-30	X		528-7698	AH	

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:55Z
Check the source to verify that this is the current version before use.

Table II (cont.) Tubes for tires used on trucks, trailers, earthmoving, agricultural and industrial vehicles and on motor scooters

(1) Tube Size	TR Valve	(1) Also fits tire sizes	(2) Valve location Off	(2) Valve location On	NSN 2610-00-	Normal applications (see S7.1)	Replaces NSN's-2610-00-
18.4-34	218A	15-34	X		528-7700	AH	
18.4-38 18.4.42	218A SP-800		X		476-6472	AH AA	
19.5-19.5	70		X		476-6473	AX	
20.5-25	SP-4000			X	476-6474	AF	
20.8-38	218A		X		476-6475	AH	
21.00-24	SP-4000				Use 21.00-24/25		
21.00-24/25	SP-4000	21.00-24 21.00-25		X	204-3617	AF, AW	051-9614, 051-9622, 269-7733, 446-2489
21.00-25	SP-4000				Use 21.00-24/25		
21.00-29	SP-4000			X	828-9403	AF	269-7528, 591-2848
21.00-35	SP-4000			X	476-6476	AF	
21.00-49	SP-4000			X	476-6477	AF	
23x8.50-12	13CW		X		177-7096	AG	
23x8.50-12	13 87S		X X		177-7097	AG AG	

Source: https://assist.dla.mil -- Downloaded: 202640-26T12:55Z
Check the source to verify that this is the current version before use.

Table II (cont.)

Tubes for tires used on trucks, trailers, earthmoving, agricultural and industrial vehicles and on motor scooters

(1) Tube Size	TR Valve	(1) Also fits tire sizes	(2) Valve location Off	(2) Valve location On	NSN 2610-00-	Normal applications (see S7.1)	Replaces NSN's-2610-00-
23.1-26	218A	18-26 18.00-26	X		528-7701	AH	
23.1-30	218A	18-30	X		476-6480	AH	
23.1-34	218A	18-34	X		431-8346	AH	
23.5-25	SP-4000			X	529-5760	AF	
24.00-25	SP-4000			X	828-9402	AF, AW	204-0326, 591-2862
24.00-29	SP-4000			X	828-9404	AF, AW	
24.00-32	SP-4000				Use 24.00-32/33		
24.00-32/33	SP-4000	24.00-32 24.00-33		X	828-9405	AF	591-2858, 051-9692, 051-9698
24.00-33	SP-4000				Use 24.00-32-33		
24.00-35	SP-4000			X	476-6481	AF	
24.00-49	SP-4000			X	476-6482	AF	
24.5-32	218A		X		476-6483	AH	
26.5-25	SP-4000			X	529-5761	AF	

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:55Z
Check the source to verify that this is the current version before use.

Table II (cont.) Tubes for tires used on trucks, trailers, earthmoving, agricultural and industrial vehicles and on motor scooters

(1) Tube Size	TR Valve	(1) Also fits tire sizes	(2) Valve location Off	(2) Valve location On	NSN 2610-00-	Normal applications (see S7.1)	Replaces NSN's-2610-00-
26.5-29	SP-4000			X	476-6484	AF	
27x8.50-15	13CW		X		424-9919	AG	
27.00-33	SP-4000			X	828-9406		529-5762, 591-2852
27.00-49	SP-4000			X	476-6485	AF	
28.1-26	218A		X		165-3906	AH	
29.5-25	SP-4000			X	529-5763	AF	
29.5-29	SP-4000			X	585-4791	AF	529-5764, 147-5328
29.5-35	SP-4000	33.25-35		X	140-1160	AF	
30.00-33	SP-4000			X	828-8243	AF	
33.25-35	SP-4000				Use 29.5-35		
33.5-33	SP-4000	37.5-33		X	529-5765	AF	
33.5-39	SP-4000	37.5-39		X	476-6487	AF	
36.00-41	SP-4000			X	828-9408	AF, AW	591-2855
36.00-51	SP-4000	37.5-51		X	476-6488	AF, AW	

Source: https://assist.dla.mil -- Downloaded: 202640-26T12:55Z
Check the source to verify that this is the current version before use.

Table II (cont.) Tubes for tires used on trucks, trailers, earthmoving, agricultural and industrial vehicles and on motor scooters


(1) Tube Size	TR Valve	(1) Also fits tire sizes	(2) Valve location Off	(2) Valve location On	NSN 2610-00-	Normal applications (see S7.1)	Replaces NSN's-2610-00-
37.5-33	SP-4000				Use 33.5-33		
37.5-39	SP-4000				Use 33.5-39		
37.5-51	SP-4000				Use 36.00-51		

(1) Tire size designation is same as tube size designation excepting tire sizes shown in column titled "Also fits tire sizes."
(2) Valve location related to center line of tube.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:55Z
Check the source to verify that this is the current version before use.

EFFECTIVE DIMENSIONS OF
CONVERTIBLE VALVES BEFORE BENDING


TR VALVE NO.	A	C M	D ±.03
75A	3.78	1.06	.25
76A	4.16	1.06	.25
177A	4.53	1.06	.25
77A	4.91	1.06	.25
175A	5.28	1.06	.25
78A	5.78	1.06	.25
179A	6.34	1.06	.25
460	3.78	1.06	.25
461	4.53	1.06	.25
462	4.91	1.06	.25
463	5.28	1.06	.25
464	5.78	1.06	.25
465	6.34	1.06	.25

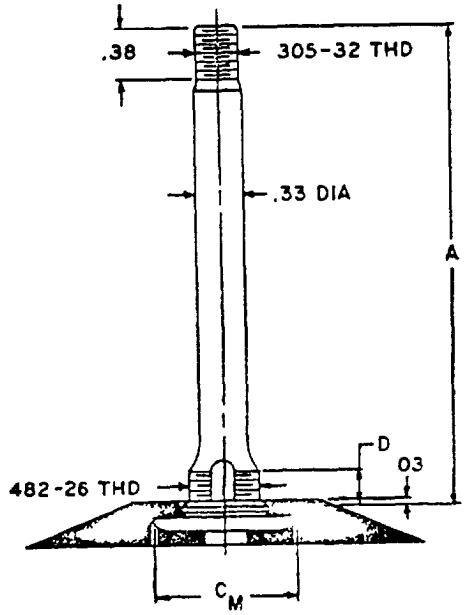

NOTE: Valves are also made in two-piece, or interchangeable type. Two-piece valves complete with the base or spud, have the same effective dimensions and carry the same tire and rim association (TR) numbers as the corresponding one-piece valves.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:55Z
Check the source to verify that this is the current version before use.

EFFECTIVE DIMENSIONS OF
CONVERTIBLE VALVES IN FINISHED TRUCK-BUS TUBES

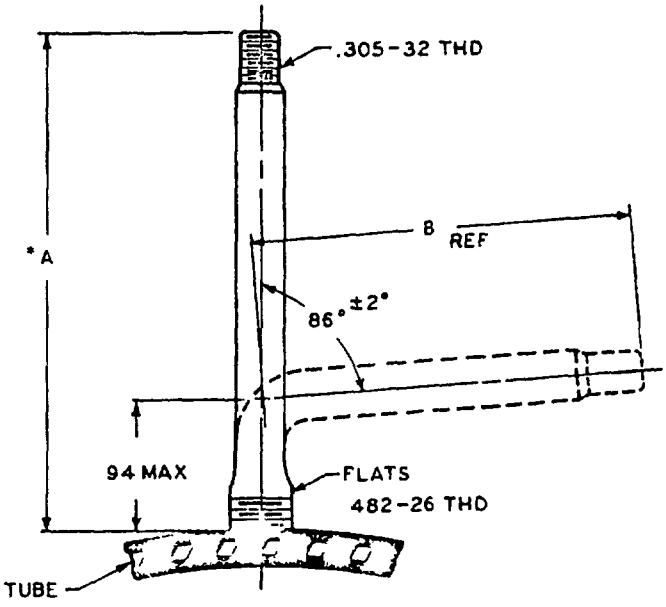

*Refer to Page 8-07 for "A" dimension


TR VALVE NO	B (Ref.)
75A	3 00
76A	3 38
177A	3.75
77A	4 13
175A	4.50
78A	5 00
179A	5.56

NOTE Valves are also made in two piece, or interchangeable type Two piece valves, complete with the base or spud, have the same effective dimensions and carry the same Tire and Rim Association (TR) numbers as the corresponding one-piece valves

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:55Z
Check the source to verify that this is the currentersion before use.

CONVERTIBLE VALVE DIMENSION CHART

For Use in Converting Single Bend Valves Into Other Shapes

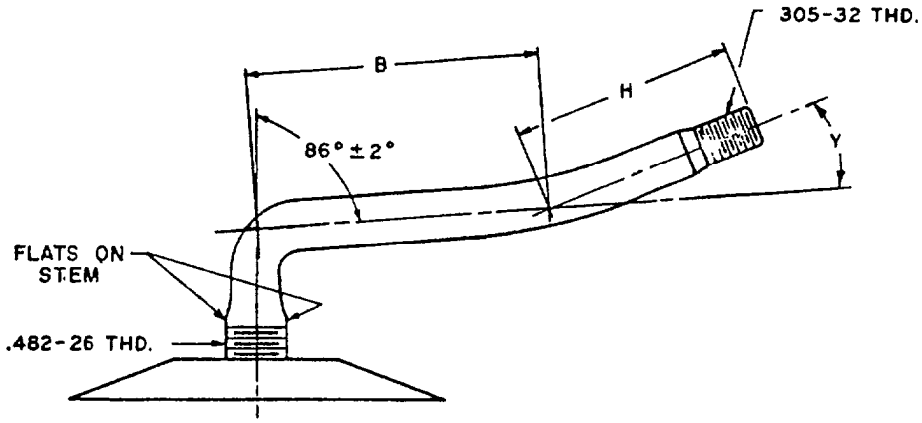

TOOL SETTING TO PRODUCE ANGLE "Y"

Tool Setting	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q
Angle—Y	4°	11°	16°	21°	26°	31°	36°	41°	46°	51°	56°	61°	66°	71°	76°	81°	86°


TOOL SETTING TO PRODUCE LENGTHS "H" AND "B"

Tool Setting	Length "H"	LENGTH "B" + .13 — 0						
		TR75A	TR76A	TR177A	TR77A	TR175A	TR78A	TR179A
12	1 50	1 50	1 88	2 25	2 63	3 00	3 50	4 06
13	1 63	1 38	1 75	2.13	2 50	2 88	3 38	3 94
14	1 75	1 25	1 63	2 00	2 38	2 75	3 25	3 81
15	1 88	1 13	1 50	1 88	2 25	2 63	3 13	3 69
16	2 00		1.38	1 75	2 13	2.50	3 00	3 56
17	2.13		1 25	1 63	2 00	2 38	2 88	3 44
18	2 25		1 13	1 50	1 88	2 25	2 75	3 31
19	2 38			1 38	1 75	2 13	2 63	3 19
20	2 50			1 25	1 63	2 00	2 50	3 06
21	2 63			1 13	1 50	1 88	2 38	2 94
22	2 75				1 38	1 75	2 25	2 81
23	2.88				1 25	1 63	2 13	2 69
24	3 00				1 13	1 50	2 00	2 56
25	3 13					1 38	1 88	2 44
26	3 25					1 25	1 75	2 31
27	3 38					1 13	1 63	2 19
28	3 50						1 50	2 06
29	3 63						1 38	1 94
30	3 75						1 25	1 81
31	3 88						1 13	1 69
32	4 00							1 56
33	4 13							1 44
34	4 25							1 31
35	4 38							1 19
36	4 50							1 06

VALVE CONVERTING TOOL WILL NOT PRODUCE LENGTH "B" LESS THAN 1 13"

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:55Z
Check the source to verify that this is the current version before use.

TR 460 SERIES
EFFECTIVE DIMENSIONS OF CONVERTIBLF VALVES
IN FINISHED TRUCK-BUS TUBES

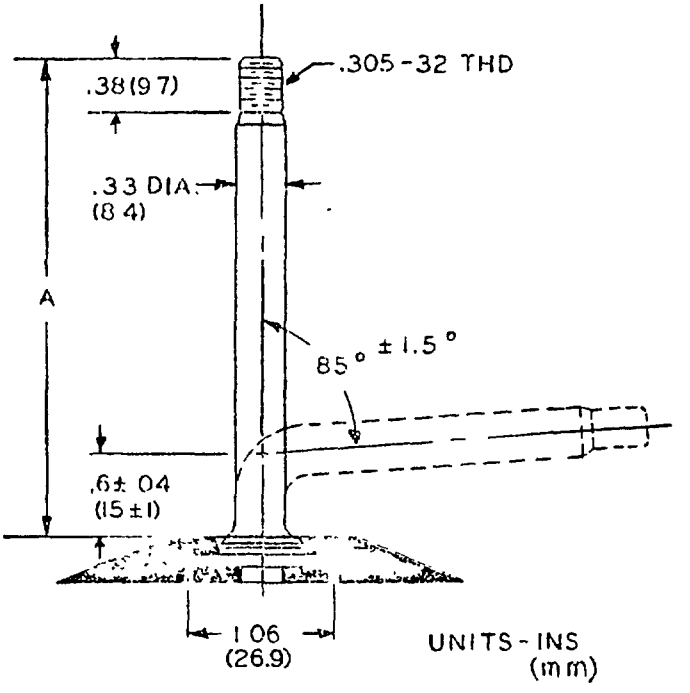


TR VALVE NO	A	FOR EQUIV SERVICE TO TR VALVE NO
460	3.54 (90)	75A
461	4.13 (105)	177A
462	4.53 (115)	77A
463	4.92 (125)	175A
464	5.51 (140)	78A
465	6.10 (155)	179A


NOTE Valves are also made in two-piece, or interchangeable type Two-piece valves, complete with the base or spud, have the same effective dimensions and carry the same tire and rim association (TR) numbers as the corresponding one-piece valves.

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:55Z
Check the source to verify that this is the current version before use.

TR-CH-9 SUPER LARGE BORE
TRACTOR TIRE AND TUBE CORE HOUSING
FOR USE WITH F-900 AND F-910 SUPER LARGE BORE VALVES

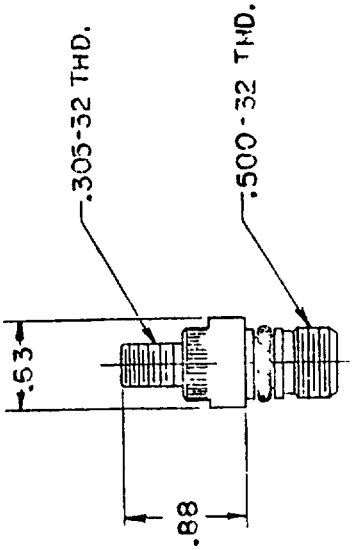



TR-F910 SUPER LARGE BORE
TRACTOR TUBELESS VALVE
FOR USE WITH AGRICULTURE TIRES 42" RIM DIA AND LARGER

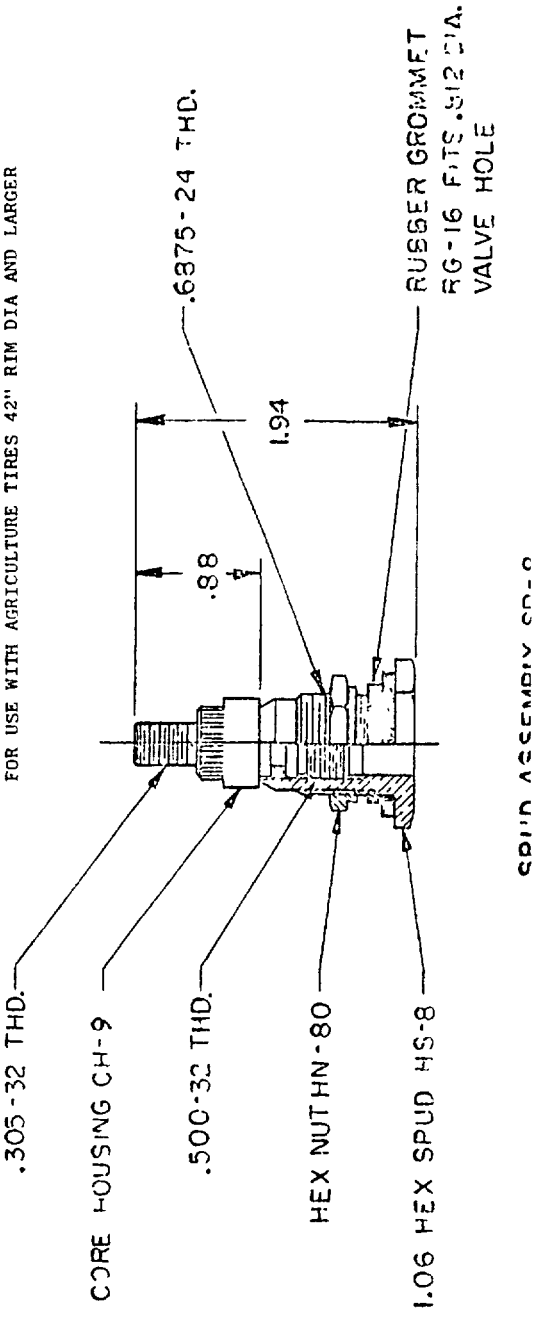

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:55Z
Check the source to verify that this is the current version before use.

TR-F900 SUPER LARGE BORE
TRACTOR VALVE
FOR USE WITH AGRICULTURE TIRE 42" RIM DIA AND LARGER

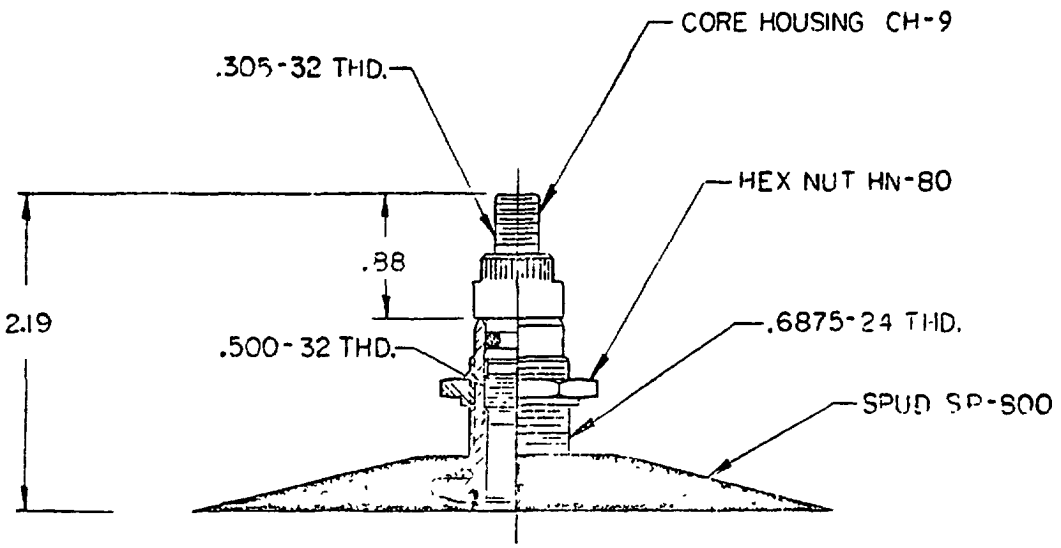

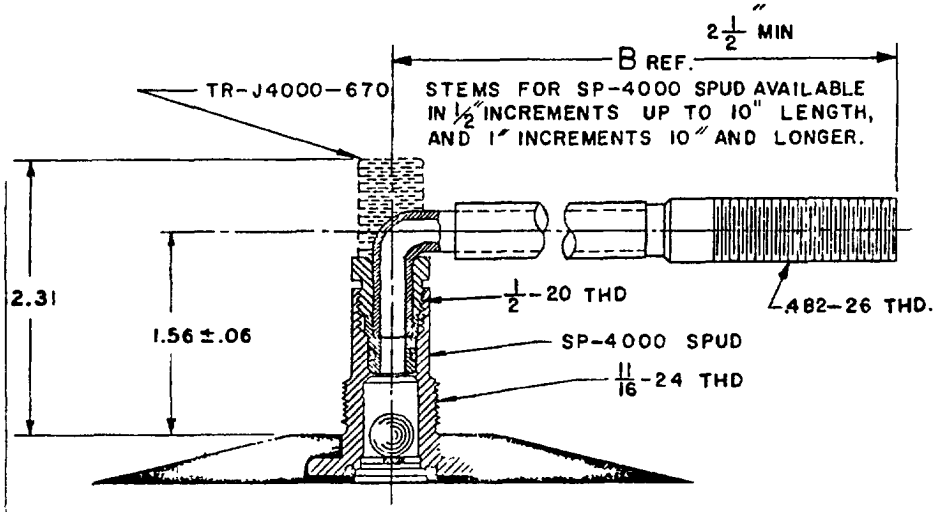

NOTE: Stems for TR-J650 and TR-J670 Rim Valves can be used interchangeably with SP-4000 and HS-2 Spunds.

Stems for use with SP-4000 Spuds are specified as TR-J4000 (Horizontal length B Ref.)
Example: For a dimension (BRef.) of 9½", the stem number is TR-J4000-9½".

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:55Z
Check the source to verify that this is the current version before use.

Numerical index of Federal stock numbers class 2610, identified to tube size and valve combinations used in this standard.

FSN 2610	Tube size	TR valve
051-9100	2.80/ 2.50-4	87A
9110	3.40/ 3.00-5	87
9114	4.10/ 3.50-6	87
9120	3.40/ 3.00-7	87
9126	4.80/ 4.00-7	87
9130	5.30/ 4.50-7	87
9148	4.80/ 4.00-9	13CW
9182	GS-15	13
9204	7.00-15	15
9210	7.50-15	135
9216	9.00-15	175A
	9.00-15	463
9224	7.00-15	150
9234	5.10-16	13
9266	9.00-16	177A
	9.00-16	461
9306	7.00-17	75A
	7.00-17	460
9330	V18-19	13
9334	W18/19	13
9356	9.00-18	175A
	9.00-18	463
9362	10.50/11.00-18	78A
	10.50/11.00-18	464
9450	11.00-20	78A
	11.00-20	464
9454	12.00-20	78A
	12.00-20	464
9460	13.00-20	179A
	13.00-20	465
9462	14.00-20	220A
9464	14.00-20	179A
	14.00-20	465
9552	7.00-24	75A
	7.00-24	460
204-2074	7.50-16	135
3016	7.00-12	75A
	7.00-12	460
3617	21.00-24/25	SP4000
227-0354	7.50-20	15CW
0356	14.9 -30	218A
260-7333	5.00-15	15CW
7335	8.25-24	77A
	8.25-24	462
7338	4.00-15	15CW
7341	10.00-24	78A
	10.00-24	464
7342	10.00-22	78A
	10.00-22	464
7345	10.00-20	78A
	10.00-20	464
7346	7.50-17	75A
	7.50-17	460
7347	8.25-15	77A
	8.25-15	462
7353	9.5 -24	218A
7354	10.00-15	78A
	10.00-15	464
7359	11.2 -28	218A
7361	8.3 -24	218A
7363	11.00/12.00-24	220A
7364	7.50-24	177A
	7.50-24	461
262-1948	7.50-10	150CW
266-6650	8.90-15	13
6659	9.00-16	15CW
6663	7.50-18	15CW
6665	11.00-22	78A
	11.00-22	464
269-7329	7.50-15	177A
	7.50-15	461
350-1964	6.50-20	75A
	6.50-20	460
9975	6.00-16	15
403-5740	15-19.5	70
405-4364	6.50-16	135
4365	7.50-10	135
4366	9.00-10	135
4367	8.25-16	177A
	8.25-16	461
4368	16.00-20	220A
4369	5.70/5.00-8	87S
4371	5.30/4.50-12	87A
4372	5.70/5.00-8	87A
4373	9.00-10	15CW
4374	7.00-15	75A
	7.00-15	460
4375	7.00-15	15CW
4376	8.25-18	77A
	8.25-18	462
409-7790	18.00-26	218A
424-9874	2.80/2.50-4	87S
9875	3.40/3.00-5	87A
9876	3.40/3.00-5	87S
9877	4.10/3.50-6	87A
9878	4.10/3.50-6	87S
9879	4.80/4.00-9	87A
9880	4.80/4.00-9	87S
9881	4.80/4.00-12	87A
9882	4.80/4.00-12	87S
9883	7.8-14.5	300
9884	7.00-10	135
9885	7.00-14	13CW
9886	7.5L-15	15CW
9887	8.00-16.5	15CW
9888	8.00-16.5	150CW
9889	8.5L-14	15CW

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:55Z
Check the source to verify that this is the current version before use.

Numerical index of Federal stock numbers class 2610, identified to tube size and valve combinations used in this standard.

FSN 2610	Tube size	TR valve
051-9560	9.00-24	175A
	9.00-24	463
9570	11.2 -24	218A
9574	10.00-24	218A
9578	11.00-24	78A
	11.00-24	464
9588	11.00/12.00-24	218A
9594	13.00-24	179A
	13.00-24	465
9602	14.00-24	179A
	14.00-24	465
9610	16.00-24/25	SP4000
9628	18.00-24/25	SP4000
9676	16.9 -30	218A
061-0498	6.00-14	13CW
0500	4.10/ 3.50-4	87
0501	K-14	13
088-9292	K-13	13
089-5996	5.30/ 4.50-6	87
5997	5.90/ 6.00-9	135
104-1778	4.80/ 4.00-8	87A
1779	4.80/ 4.00-8	87S
140-1160	29.5-35	SP4000
142-5139	10.00-15	15CW
165-3901	11.00-16	150CW
3902	11x4.00-5	13
3904	7.00-15	135
3905	4.10/ 3.50-4	87S
3906	28.1-26	218A
173-5230	7.50-16	150
177-6891	F-14	13
6892	G-14	13
7096	23x8.50-12	13CW
7097	23x8.50-12	87S

FSN 2610	Tube size	TR valve
269-7332	7.00-16	15
7336	4.80/ 4.00-12	13CW
7340	6.50-16	15CW
7342	14.9 -28	218A
7343	7.00-18	75A
	7.00-18	460
7344	7.50-18	177A
	7.50-18	461
7346	7.00-20	75A
	7.00-20	460
7347	7.50-20	177A
	7.50-20	461
7353	4.10/ 3.50-5	87
7356	5.30/ 4.50-12	13CW
7357	9.50-20	15CW
7364	4.00-9	13
7373	6.50-16	15
7377	6.50-16	150
7378	7.00-16	150
7383	9.00-20	175A
	9.00-20	463
7390	12.00-24	78A
	12.00-24	464
7392	18.4 -24	218A
7395	18.4 -28	218A
7397	9.5 -32	218A
7402	6.90/ 6.00-12	13CW
7408	16.9-28	218A
7758	4.00-19	15CW
7760	7.50-16	15CW
278-0889	16.00-20/21	SP4000
288-3927	7.50-15	150
294-4321	V18-19	4
4325	K-15	13
7639	13.6 -38	218A
7640	5.00-16	15CW

FSN 2610	Tube size	TR valve
424-9890	8.75-16.5	15CW
9891	8.75-16.5	150CW
9892	9.5 -16	218A
9893	9.5L-14	15CW
9894	9.5L-15	15CW
9895	9.50-16.5	15CW
9896	9.50-16.5	150CW
9898	10-16.5	15CW
9899	10.00-16	15CW
9901	11x4.00-5	87S
9902	11L-14	15CW
9903	11L-15	15CW
9904	11L-16	15CW
9906	11.25-28	218A
9907	12-16.5	15CW
9908	12.5L-15	15CW
9909	12.5L-16	15CW
9910	13.50-16.1	15CW
9911	13.50-16.1	218A
9912	13.9 -36	218A
9913	14-17.5	15CW
9914	15-22.5	70
9915	16x6.50-8	87S
9916	18x9.50-8	13CW
9917	18x9.50-8	87S
9919	27x8.50-15	13CW
9920	5.10-16	15

Source: https://assist.dla.mil -- Downloaded: 20260-26T12:55Z
Check the source to verify that this is the current version before use.

FSN 2610	Tube size	TR valve
431-9346	23.1-34	218A
451-1039	18 22.5	70
476-6461	14L-16.1	15CW
6462	16.00-24	220A
6463	15.5-25	SP4000
6464	16.5L-16.1	15CW
6465	16.5L-16.1	218A
6466	16.9-38	218A
6467	17.5-25	SP4000
6468	18-19.5	70
6471	18.00-49	SP4000
6472	18.4-38	218A
6473	19.5-19.5	70
6474	20.5-25	SP4000
6475	20.8-38	218A
6476	21.00-35	SP4000
6477	21.00-49	SP4000
6480	23.1-30	218A
6481	24.00-35	SP4000
6482	24.00-49	SP4000
6483	24.5-32	218A
6484	26.5-29	SP4000
6485	27.00-49	SP4000
6487	33.5-39	SP4000
6488	36.00-51	SP4000
489-2554	6.50-10	135
497-6928	6.00-16	135
6930	6.90/6.00-9	87S
499-8025	16x6.50-8	13
528-7057	11.2-34	218A
7641	6.2-30	218A
7643	7.2-24	218A
7644	9.5-16	15CW
7652	9.5-36	218A
7665	11.2-36	218A
7666	11.2-38	218A
7671	12.4-26	218A
7676	12.4-28	218A
7678	12.4-38	218A
7681	13.6-26	218A
7682	13.6-28	218A
528-7732	7.00-16	135
7741	10.00-20	218A
7755	11.25-24	218A
7757	5.50-16	15CW
7759	6.00-16	15CW
7760	5.90/6.40-15	15CW
7762	6.50-36	15CW
7771	3.50-12	15CW
7772	4.00-12	15CW
7774	4.00-18	15CW
7775	4.00-36	15CW
7783	6.50-10	15CW
7789	6.90/6.00-9	13CW
7794	9.00-10	150CW
7798	5.70/5.00-8	13CW
7802	6.00-21	15CW
7806	7.60-15	15CW
7815	11.00-16	15CW
7816	13.6-24	218A
7828	5.30/4.50-6	13
7829	16.9-24	218A
7831	15.5-38	218A
7832	16.00-16	218A
7847	8.25-16	150
7849	8.25-17	77A
	8.25-17	462
7850	8.25-20	77A
	8.25-20	462
529-1699	15-16A	220A
5729	9.4-20	175A
	9.4-20	463
5731	10.00-18	78A
	10.00-18	464
5739	10.3-20	78A
	10.3-20	464
5759	18.00-32/33	SP4000
5760	23.5-25	SP4000
5761	26.5-25	SP4000
5763	29.5-25	SP4000
5765	33.5-33	SP4000
8660	4.10/3.50-5	13
721-9305	5.30/4.50-12	87S
9311	6.90/6.00-6	87A
9312	6.90/6.00-6	87S
9313	6.90/6.00-12	87A
9314	6.90/6.00-12	87S
729-4570	7/8-17.5	300
4572	P-14	13
4575	M-14	13
4581	8/9-19.5	300
4583	F-13	13
4589	G-13	13
764-4421	2.80/2.50-4	87
774-9081	12.4-16	15CW
818-3621	9.5-36	15CW
826-0111	7-22.5	300
0112	8/9-22.5	300
0114	10-22.5	300
0116	11/12-22.5	300
0119	11/12-24.5	300
828-8243	30.00-33	SP4000
9402	24.00-25	SP4000
9403	21.00-29	SP4000
9404	24.00-29	SP4000
9405	24.00-32/33	SP4000
9406	27.00-33	SP4000
9408	36.00-41	SP4000
889-9158	6.90/6.00-9	87A
9174	4.80/4.00-8	87
9831	4.10/3.50-6	13
900-8636	6.00-16	150
975-4825	12.4-24	218A
4826	7.50-15	15CW

Source: https://assist.dla.mil -- Downloaded: 202640-26T12:55Z
Check the source to verify that this is the current version before use.

FSN 2610	Tube size	TR valve	FSN 2610	Tube size	TR valve
528-7683	13.6-36	218A	555-5666	7.00-15	177A
7685	14.9-24	218A		7.00-15	461
7687	14.9-26	218A	5669	9.00-24	218A
7691	14.9-38	218A	5673	12.4-38	218A
7692	16.9-36	218A	5676	6.70-15	15CW
7696	16.9-34	218A	5678	11.00-15	78A
7697	18.4-26	218A		11.00-15	464
7698	18.4-30	218A	6611	M-16	15
7700	18.4-34	218A	6613	13.00/14.00-24	220A
7701	23.1-26	218A	6614	K-16	15
7702	5-12	15CW	6615	G-16	15
7703	6-12	15CW	569-0817	7.50-10	15CW
7705	7-16	15CW	585-0831	6.70/7.10-15	15
7709	4.80/4.00-8	13CW	4791	29.5-29	SP4000
7712	7.50-15	75A	591-2859	7.50-10	75A
	7.50-15	460		7.50-10	460
			2865	M-15	13
			684-1899	5-8	13CW
			1900	6-16	15
			721-7279	4.10/3.50-4	87A
			9293	4.10/3.50-5	87A
			9294	4.10/3.50-5	87S
			9301	5.30/4.50-6	87A
			9304	5.30/4.50-6	87S

Source: https://assist.dla.mil -- Downloaded: 202640-26T12:55Z
Check the source to verify that this is the current version before use.

GENERAL SERVICES ADMINISTRATION - FEDERAL SUPPLY SERVICE

SPECIFICATION COMMENT SHEET

BUDGET BUREAU NO. 29-R0175

INSTRUCTIONS

This form provides a way for users of this specification to inform the originator of problems encountered in its use. It is not to be used to request changes to accommodate proprietary features. All comments will be considered and appreciated, but please do not expect a reply. To comment detach, complete, fold, staple, and mail. to: Gen Svcs Admin, FSS (FYS), Washington, DC 2040

NOTE Comments on this form do not constitute or imply authorization to waive any part of the document or serve to amend contractual requirements.

1. SPECIFICATION

Fed. Std. 308B - Inner Tube, Pneumatic Tire

2. CONTRACT NO. *(If any)*	3. QUANTITY ON CONTRACT *(Optional)*	4 DOLLAR VALUE *(Optional)*

5. GENERAL NATURE OF PROBLEM *(e.g., inspection difficulties, manufacturers unable to meet tolerances, containers collapse under normal warehousing conditions, etc)*

6. SPECIFIC REQUIREMENTS AFFECTED *(Include paragraph number and lines of wording)*

7. SPECIFIC PROBLEMS *(e.g. tests in 4.2.2 will not assure that the battery will last required time, temperature ranges in table 2 do not conform to commercially available items)*

8. RECOMMENDATIONS

9. NAME OF MANUFACTURER, ASSOCIATION, GOVT., AGENCY, ETC.	10 ADDRESS *(Number, Street, City, State and Zip Code)*

11. NAME AND TITLE OF SUBMITTER	12 DATE

FORM

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:55Z
Check the source to verify that this is the current version before use.