PPP-B-1606A
March 8, 1974
SUPERSEDING
Int. Fed. Spec. PPP-B-001606(GSA-FSS)
October 28, 1970

FEDERAL SPECIFICATION

BOX, FIBERBOARD SPECIAL USE

(POST OFFICE MONEY ORDER FORMS)

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers special use die cut corrugated fiberboard boxes. For intended use see 6.1.

1.2 Classification.

1.2.1 Types and styles. Boxes cover by this specification shall be of the following types and styles as specified (see 6.2):

Type I - 300 (3-1/4 x 8-1/2 inch) card form capacity.
Style A - (See 3.3.1 and fig. I).

Type II - 500 (3-1/4 x 8-1/2 inch) card form capacity.
Style A - (See 3.3.2 and fig. II).

Type III - 1,000 (3-1/4 x 8-1/2 inch) card form capacity.
Style A - (See 3.3.3 and fig. III).

Type IV - 2,000 (3-1/4 x 6-3/16 inch) card form capacity.
Style A - (Inner box), (see 3.3.4 and fig. IV).

Type V - 2,000 card form capacity.
Style B - (Outer box), (see 3.3.5 and fig. V).

Type VI - 4,000 card form capacity.
Style B - (Outer box), (see 3.3.6 and fig. VI).

Type VII - 6,000 card form capacity.
Style B - (Outer box), (see 3.3.7 and fig. VII).

Type VIII - 10,000 card form capacity.
Style B - (Outer box), (see 3.3.8 and fig. VIII).

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issues in effect on the date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

Federal Specifications:

PPP-B-636 - Boxes, Shipping, Fiberboard.

PPP-F-320 - Fiberboard: Sheet, Stock and Cut Shapes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:51Z
Check the source to verify that this is the current version before use.

Federal Standard:

Fed. Std. No. 123 - Marking for Domestic Shipment (Civil Agencies).

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications and Standards and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20402.

(Single copies of this specification and other Federal Specifications required by activities outside the Federal Government for bidding purposes are available without charge from Business Service Centers at the General Services Administration Regional Offices in Boston, New York, Washington, DC, Atlanta, Chicago, Kansas City, MO, Fort Worth, Denver, San Francisco, Los Angeles, and Seattle, WA.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications and Standards from established distribution points in their agencies.)

Military Standard:

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.

(Copies of Military Specifications and Standards required by suppliers in connection with specification procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless a specific issue is identified, the issue in effect on date of invitation for bids or request for proposal shall apply.

Uniform Classification Committee, Agent:

Uniform Freight Classification.

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, IL 60606.)

National Motor Freight Traffic Association, Inc., Agent:

National Motor Freight Classification.

(Application for copies should be addressed to the American Trucking Associations, Inc., Tariff Order Section, 1616 P Street, N.W., Washington, DC 20036.)

3. REQUIREMENTS

3.1 Materials.

3.1.1 Fiberboard. The material shall conform to type CF (corrugated), class domestic, variety SW (single wall) or double face conforming to PPP-F-320.

3.1.2 Materials for securing body joint of types V, VI, VII, and VIII.

3.1.2.1 Tape. Tape shall be as specified in PPP-B-636 for butted body joints.

3.1.2.2 Staples and stitches. The stitches or staples shall meet the following requirements:

(a) Flat wire 0.020 inch thick, 0.103 inch wide, or
(b) Arcuate wire 0.017 inch thick, 0.103 inch wide, and
(c) Wire hardness not less than equivalent of Rockwell B-90.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:51Z
Check the source to verify that this is the current version before use.

3.2 Construction.

3.2.1 Box body. The box body shall be constructed of one piece of fiberboard, die cut and scored to form the box. Direction of flutes shall be shown in appropriate figure I through IV or according to PPP-B-636 for the type box to be manufactured. The body joint shall be butted type and located as shown in appropriate figure for type box to be manufactured. When the lapped body joint (Manufacturer's Joint) is used, one edge of the fiberboard shall overlap outside the adjacent edge not less than 1-1/4 inches. The joint shall be secured by staples or stitches specified in 3.1.2.2 and located not more than 2-1/2 inches apart with the end staple or stitch not less than 3/4 nor more than 1 inch from the edge of the overlapping fiberboard. When the butted joint is used it shall be taped using the tape specified in 3.1.2.1. The gummed tape shall be centered on the joint, extend the entire length of the joint, and shall adhere over the entire area in contact with the fiberboard.

3.3 Box types I through VIII.

3.3.1 Type I box. Size shall be as shown in figure 1 and shall be capable of containing 300, 3-1/4 x 8-1/2 inch money order forms.

3.3.1.1 Style. Type I box shall be style A, one-piece tuck-end box style (OPTE), modified as shown in figure 1.

3.3.1.2 Material. Materials shall be mimimum grade 125, B-flute and shall be as specified in 3.1.1.

3.3.2 Type II box. Size shall be as shown in figure 2 and shall be capable of containing 500 - 3-1/4 x 8-1/2 inch money order forms.

3.3.2.1 Style. Type II box shall be style A, one-piece tuck-end box style (OPTE), modified as shown in figure 2.

3.3.2.2 Material. Materials shall be the minimum specified in 3.3.1.2.

3.3.3 Type III box. Size shall be as shown in figure 3 and shall be capable of containing 1000 - 3-1/4 x 8-1/2 inch money order forms.

3.3.3.1 Style. Type III box shall be style A, one-piece tuck-end box style (OPTE), modified as shown in figure 3.

3.3.3.2 Material. Fiberboard material shall be as specified in 3.3.1.2.

3.3.4 Type IV box. Size shall be as shown in figure 4 and shall be capable of containing 2,000 - 3-1/4 x 6-3/16 inch card forms.

3.3.4.1 Style. Type IV box shall be style A, one-piece tuck-end box style (OPTE), modified as shown in figure 4.

3.3.4.2 Material. Materials shall be minimum, grade 200, C-flute and as specified in 3.1.1.

3.3.5 Type V box. Size shall be as shown in figure 5 and shall be capable of containing 2,000 card forms when these card forms are packaged in a type IV box.

3.3.5.1 Style. Types V, VI, VII, and VIII boxes shall be style B regular slotted (RSC), end opening and taped, butted type body joint in accordance with PPP-B-636.

3.3.5.2 Material. Fiberboard material shall be as specified in 3.3.4.2.

3.3.6 Type VI box. Size shall be as shown in figure 6 and shall be capable of containing 4,000 card forms when these card forms are packaged in two type IV boxes.

3.3.6.1 Style. Type VI shall be style B (see 3.3.5.1).

3.3.6.2 Materials. Fiberboard material shall be as specified in 3.3.4.2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:51Z
Check the source to verify that this is the current version before use.

3.3.7 Type VII box. Size shall be as shown in figure 7 and shall be capable of containing 6,000 card forms when these card forms are packaged in three type IV boxes.

3.3.7.1 Style. Type VII boxes shall be style B (see 3.3.5.1).

3.3.7.2 Material. Fiberboard material shall be as specified in 3.3.4.2.

3.3.8 Type VIII box. Size shall be as shown in figure 8 and shall be capable of containing 10,000 card forms when these card forms are packaged in five type IV boxes.

3.3.8.1 Style. Type VIII box shall be style B (see 3.3.5.1), except for stitched body joint only.

3.3.8.2 Material. Fiberboard material shall be as specified in 3.3.4.2.

3.4 Workmanship. The completed boxes shall meet the workmanship requirements of PPP-B-636.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.2 Sampling for inspection and acceptance. Sampling for inspection and acceptance shall be performed in accordance with the provisions set forth in MIL-STD-105, except where otherwise specified.

4.3 Inspection. An inspection shall be made to determine that the packaging, packing, and marking required by this specification are complied with. Defects shall be scored as specified in table I. The sample unit shall be one shipping container fully prepared for delivery. The lot shall be the number of containers offered for delivery at one time. The inspection level shall be S-2 with an Acceptable Quality Level (AQL) of 4.0, expressed in terms of defects per hundred units.

TABLE I. Classification of defects

Examine	Defects
Marking (exterior and interior container)	Omitted, incorrect, illegible, of improper size, location, sequence, or method of application.
Materials	Component missing, damaged, or otherwise defective.
Workmanship	Inadequate application of components such as loose strapping or tape banding, inadequate stapling, bulging or distortion of containers and staples protruding that present safety hazard.

4.4 Testing of components shall be in accordance with PPP-B-636.

4.5 Inspection of end item shall be in accordance with PPP-B-636.

4.6 Tests.

4.6.1 Fiberboard. The fiberboard shall be tested for conformance with the requirements of PPP-F-320 (see 3.1.1).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:51Z
Check the source to verify that this is the current version before use.

5. PREPARATION FOR DELIVERY

5.1 Packaging shall be level C as follows: Knocked-down (KD) boxes of one type, size, and style shall be tied in uniform bundles and quantities specified in the contract or purchase order. The ties shall be made using as a minimum of two (2) pieces of rope, twine, or strapping.

5.2 Packing. Packing shall be level B or C as specified (see 6.2).

5.2.1 Level B. Boxes packaged as specified in 5.1 shall be packed as follows:

(a) Knocked-down (KD) box bundles or containers of (KD) box bundles shall be uniformily stacked and steel strapped on pallet boards (see paragraphs c and d). Pallet shall be constructed of wood with a minimum of five deck boards, three bottom boards, and two 2 by 4 stringers, or disposable type fiberboard pallets with a one-piece fiberboard top and bottom. Skid type "lifters" shall not be acceptable.

(b) Loaded pallets shall be of uniform size and sufficiently strong to withstand stacking to an overall height of fifteen feet. Each pallet unit shall not exceed fortyfour inches in height overall. One size (KD) box only to a pallet and one short pallet load, in height and number of box bundles, per shipment. Pallet sizes shall be 40 x 44, 44 x 44, or 40 x 48 inches except for these box bundles whose dimensions prohibit the use of these pallet sizes without overhang. Then the pallet size shall be such that the (KD) box will make maximum use of the pallet surface area.

(c) Boxes with the longest dimension 15 inches or less when knocked down, shall be bundled as specified in "Packaging" then marked and packed in a close fitting fiberboard shipping container in accordance with PPP-B-636 minimum grade 175 fiberboard. Size of the fiberboard containers shall be at Vendor's discretion except each fiberboard shipping container shall have the same number of fiberboard (KD) bundles with the exceptions of one shipping container per order may contain a number of fiberboard (KD) box bundles less than the bulk of the shipment.

(d) Boxes with the longest dimension more than 15 inches when knocked-down, shall be bundled as specified in "Packaging" then marked and uniformly stacked on the pallet. Top and bottom waster sheets of fiberboard material shall be placed on the stacks of bundles with the top sheet extending down on two sides a minimum of 24 inches to allow for applicable marking. The bundles of boxes shall be securely fastened to the pallet by banding with steel strapping of sufficient size and strength, and in sufficient number in each direction to sustain the unit in its original state during loading, shipment, unloading, and reshipment. Protective pads shall be placed at the corners underneath the steel strapping to prevent damage of boxes at anytime during strapping, shipping, and handling operations.

5.2.2 Level C. Boxes packaged as specified in 5.1 shall be packed so as to insure carrier acceptance and safe delivery to destination at lowest possible rate for such supplies. Packing shall be in accordance with the Uniform Freight Classification or National Motor Freight Classification Rules.

5.3 Marking. In addition to any special marking required in the contract or purchase order (see 6.2), shipments shall be marked in accordance with the requirements of Fed. Std. No. 123.

6. NOTES

6.1 Intended use. The boxes covered by this specification are intended for use in shipment and storage of postal money order forms.

6.2 Ordering data. Purchasers should select the preferred options permitted herein and include the following information in procurement documents:

(a) Title, number, and date of this specification.
(b) Types and styles required (see 1.2.1).
(c) Level packing (see 5.2).
(d) Number of boxes per bundle.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:51Z
Check the source to verify that this is the current version before use.

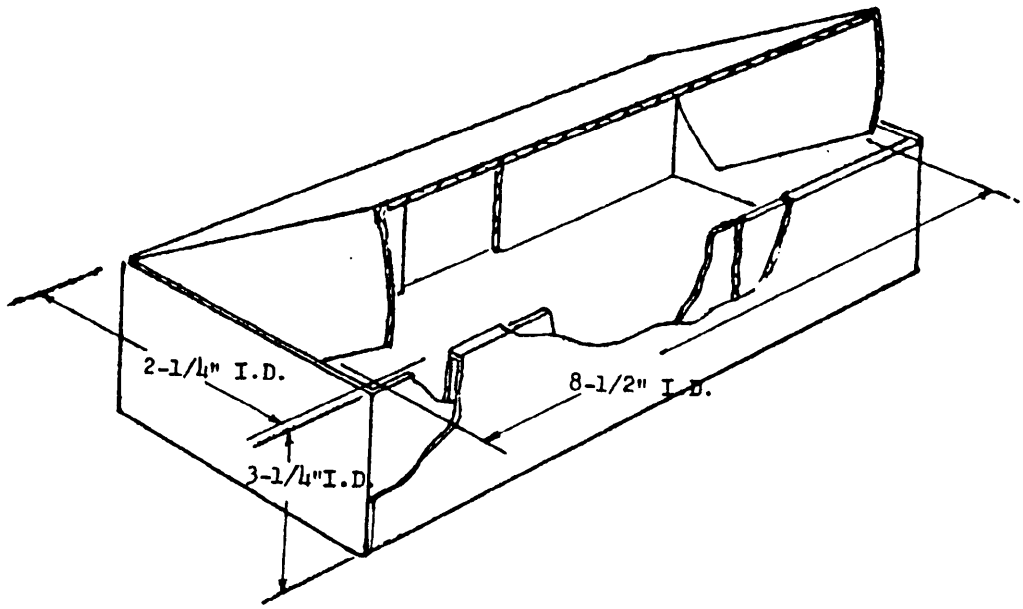


FIGURE 1. Type I box.

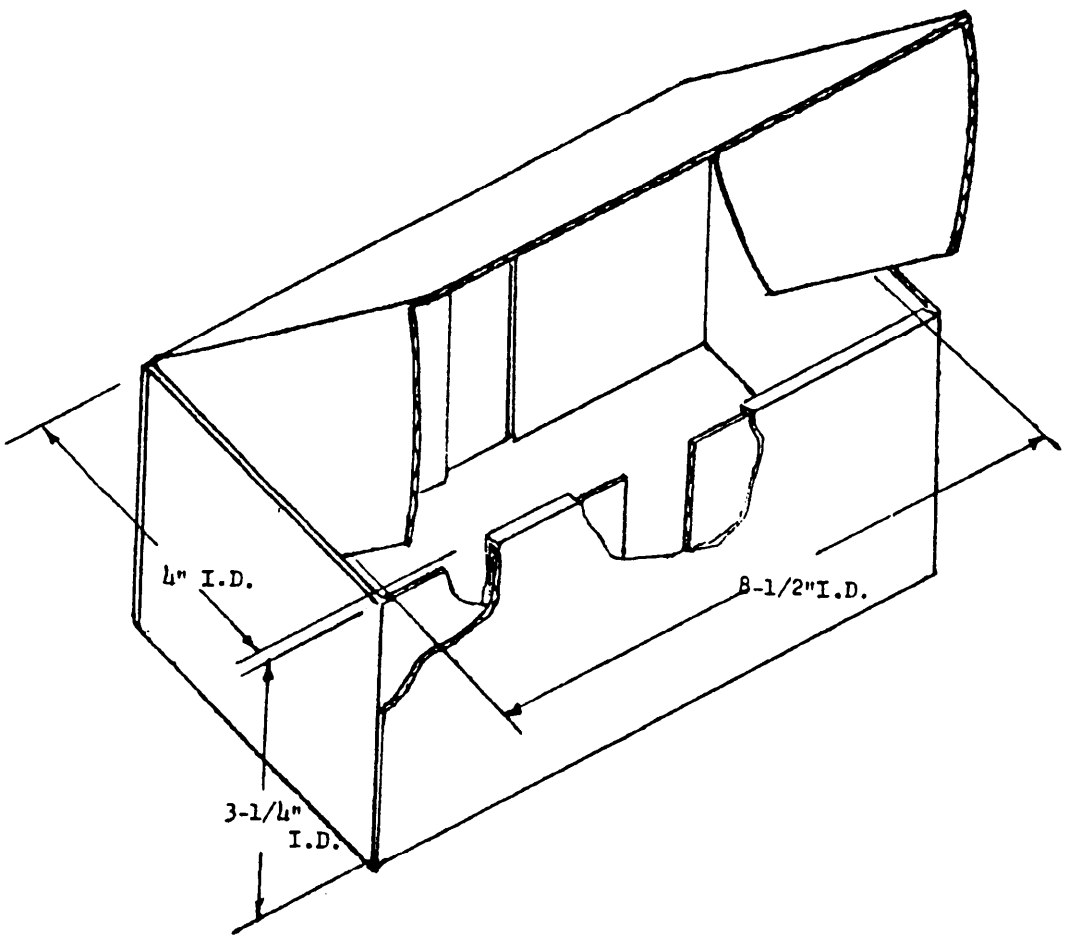


FIGURE 2. Type II box.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:51Z
Check the source to verify that this is the current version before use.

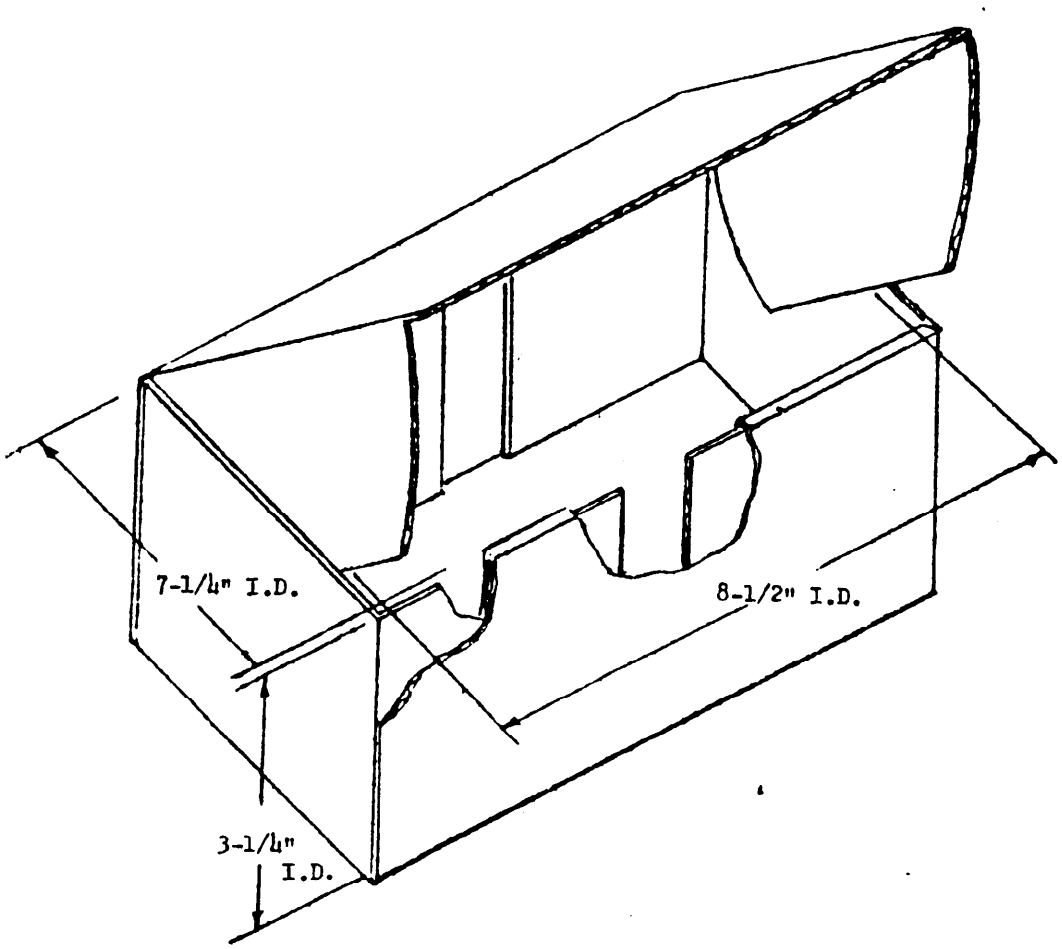


FIGURE 3. Type III box.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:51Z
Check the source to verify that this is the current version before use.

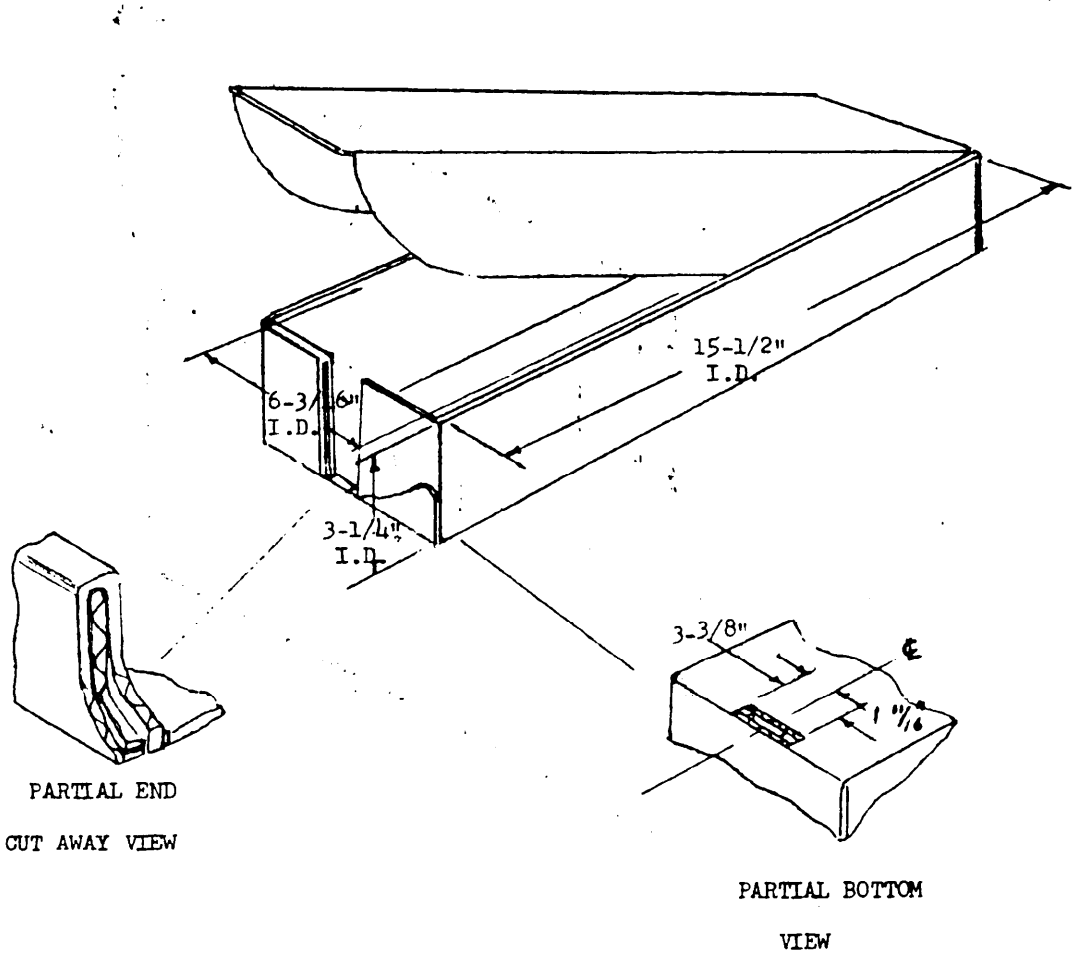


FIGURE 4. Type IV box.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:51Z
Check the source to verify that this is the current version before use.


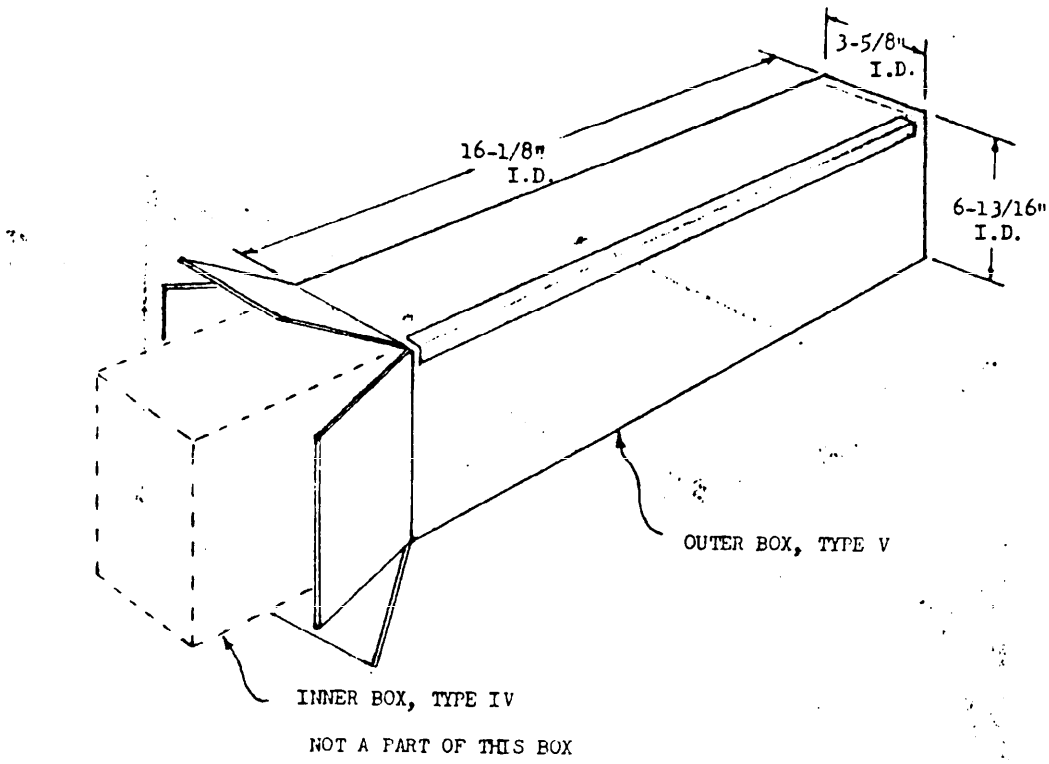


FIGURE 5. Type V box.

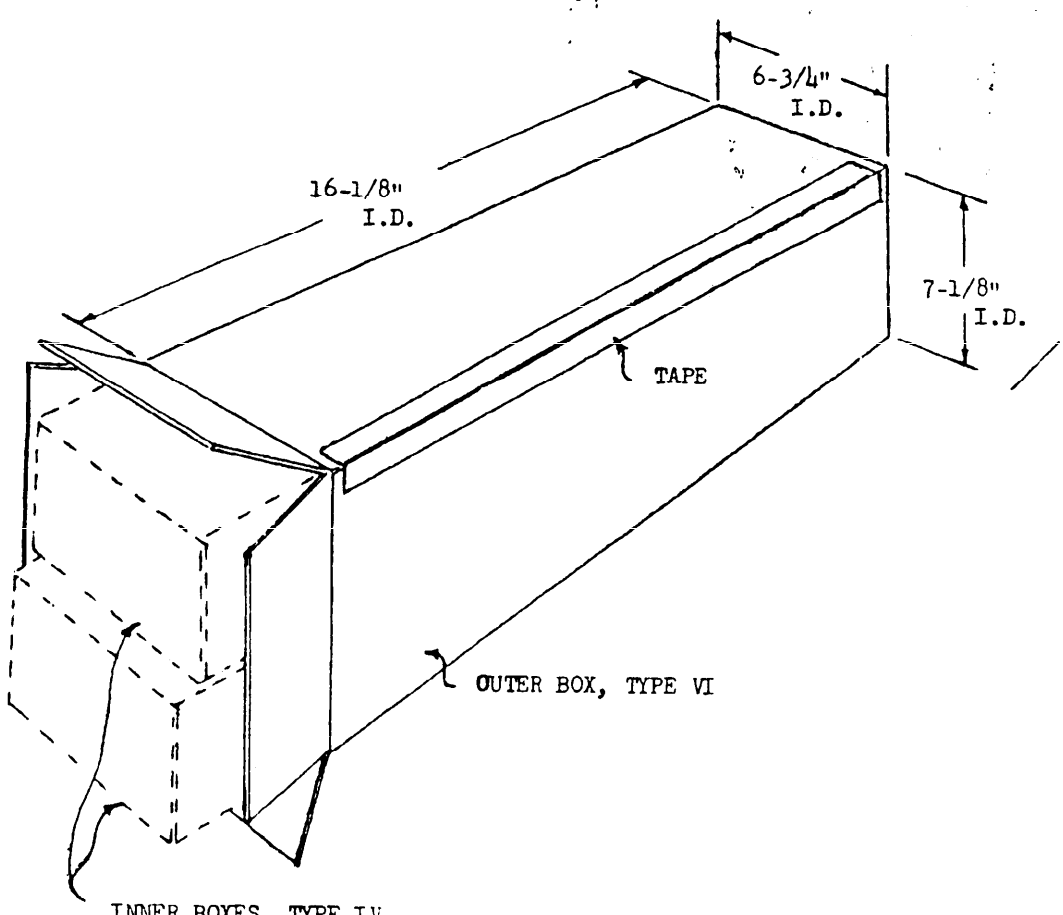

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:51Z
Check the source to verify that this is the current version before use.

FIGURE 6. Type VI box.

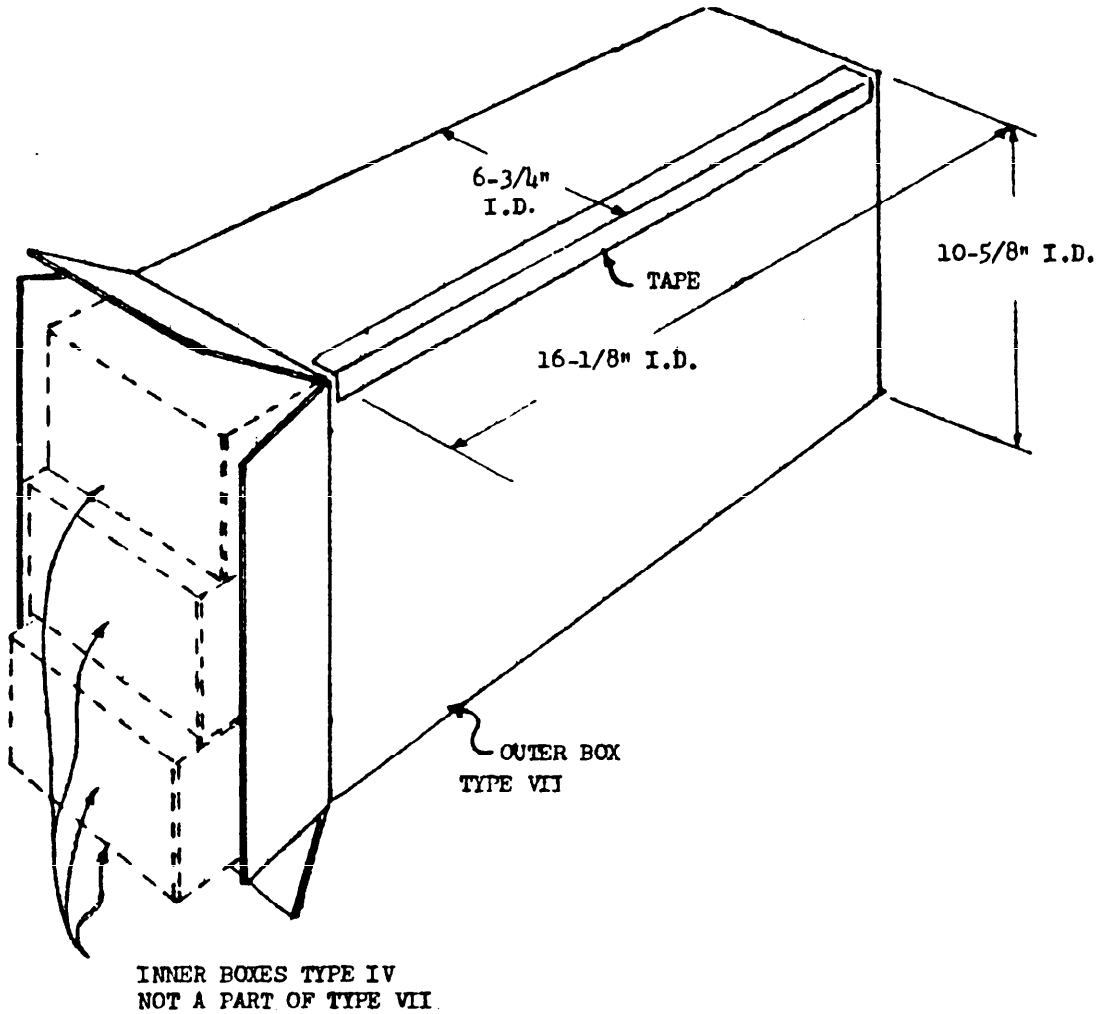


FIGURE 7. Type VII box.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:51Z
Check the source to verify that this is the current version before use.