PPP-P-1998
April 29, 1976

FEDERAL SPECIFICATION

PREPARATION FOR DELIVERY REQUIREMENTS FOR
STORAGE SECTIONS, OVERFILE, STEEL

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

1. SCOPE

1.1 Scope. This specification covers the packaging, packing, and marking requirements (see 6.1) for steel overfile storage sections as covered by AA-S-00710 and AA-S-001921.

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issues in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

Federal Specifications:

L-P-378 - Plastic Sheet and Strip, Thin Gauge, Polyolefin.
PPP-B-636 - Boxes, Shipping, Fiberboard.
PPP-F-320 - Fiberboard; Corrugated and Solid, Sheet Stock (Container Grade) and Cut Shapes.

Federal Standard:

Fed. Std. No. 123 - Marking for Shipment (Civil Agencies).

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications and Standards and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20402.

(Single copies of this specification and other Federal Specifications required by activities outside the Federal Government for bidding purposes are available without charge from Business Service Centers at the General Services Administration Regional Offices in Boston, New York, Washington, DC, Atlanta, Chicago, Kansas City, MO, Fort Worth, Denver, San Francisco, Los Angeles, and Seattle, WA.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications and Standards from established distribution points in their agencies.)

Military Specification:

MIL-D-1000 - Drawing, Engineering and Associated List.

Military Standards:

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129 - Marking for Shipment and Storage.

(Copies of Military Specifications and Standards required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless a specific issue is identified, the issue in effect on date of invitation for bids or request for proposal shall apply.

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:52Z
Check the source to verify that this is the current version before use.

National Motor Freight Traffic Association, Inc., Agent:

National Motor Freight Classification.

(Application for copies should be addressed to the American Trucking Associations, Inc., Tariff Order Section, 1616 P Street, N.W., Washington, DC 20036.)

Uniform Classification Committee, Agent:

Uniform Freight Classification.

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza., Chicago, IL 60606.)

3. REQUIREMENTS

3.1 Packaging. Packaging shall be level A or C as specified (see 6.2). Each unit shall be wiped clean just prior to packaging.

3.1.1 Level A. Shelves, when applicable, shall be wrapped in kraft paper or polyethylene film & secured at the bottom inside of the section with pressure sensitive tape or fiberboard forms. Dividers, when applicable, shall be wrapped in groups of six in kraft paper or polyethylene film and secured to the underside of the shelf or the bottom of the section in a manner that will prevent movement or dammage during shipment & storage. Alternatively, if only shelves are required, the shelves shall be positioned in a middle normal adjustment position & secured in place with pressure sensitive tape. When this option is exercised, the shelves need not be wrapped. Stacking pads, when applicable, shall be individually wrapped in kraft paper or polyethylene film and secured within the section. Doors, when applicable, shall be secured as shown in Figure A, using fiberboard conforming to PPP-F-320, type CF, class domestic, variety SW. The section shall then be enclosed in a polyethylene bag as shown in Figure A. The polyethylene film specified herein shall conform to L-P-378 and shall be a minimum of 1.5 mils thick. The kraft paper specified herein shall have a minimum basis weight of 40 pounds (24" x 36" - 500).

3.1.2 Level C. The storage sections shall be packaged to insure protection against damage during shipment and safe delivery at destination, while complying with the common carrier rules as a minimum.

3.2 Packing. Packing shall be level A, B or C as specified (see 6.2). Fiberboard used for interior blocking and bracing shall conform to PPP-F-320, type CF, class domestic, variety DW, grade 200 minimum, unless otherwise specified herein.

3.2.1 Level A. Each storage section, packaged as specified in 3.1, shall be packed in a box conforming to PPP-B-636, grade V3c minimum. Top and bottom spring pads and "L" shaped corner posts shall be used as shown in Figure A. Each pad or post shall be constructed from a single piece of fiberboard, scored and folded to produce the dimensions shown in the applicable figure. Alternatively, sections without doors may be protected with eight corner pads as shown in figure B. The corner pads shall be made of expanded polyethylene foam, having a minimum density of 2 psi, (See figure G for a typical pad design). Closure, waterproof sealing and strapping (when applicable) of boxes shall be in accordance with the appendix to PPP-B-636.

3.2.2 Level B. Each storage section packaged as specified in 3.1 shall be packed as specified in 3.2.1, except that the boxes shall conform to PPP-B-636, class-domestic, grade 275 minimum and the closure of the boxes shall be in accordance with method II of the appendix to PPP-B-636.

3.2.3 Level C. Storage sections, packaged as specified in 3.1.2, shall be packed to assure carrier acceptance and safe arrival at destination in compliance with the National Motor Freight Classification rules or the Uniform Freight Classification rules.

3.3 Marking. In addition to the special marking required by 3.3.3, all marking shall be in accordance with 3.3.1 or 3.3.2 as specified (see 6.2).

3.3.1 Civil agencies. Each shipping container shall be marked in accordance with Fed. Std. No. 123.

3.3.2 Military agencies. Each shipping container shall be marked in accordance with MIL-STD-129.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:52Z
Check the source to verify that this is the current version before use.

3.3.3 Special marking.

3.3.3.1 Precautionary marking. In addition to the marking required by 3.3.1 or 3.3.2, each shipping container shall be marked as follows in characters a minimum of 3/4 inch high. The upper corner of each side and each end shall be marked with the word "UP" and an arrow pointing to the top of the container.

The top of the containers:

TOP
THIS SIDE UP
FURNITURE-HANDLE WITH CARE

One side and one end of each container.

FURNITURE
HANDLE WITH CARE

3.3.3.2 Color identification marking. To facilitate color identification, the front and the end of the shipping container that have the above marking shall have an area approximately 3 inches by 8 inches painted to match the color of the storage section contained therein. Alternatively, color panels of the same size specified herein shall be applied to the container. The adhesive used to affix the color panels shall be of such quality as to assure that the color panels will not loosen or become detached during shipment and storage.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.2 Examination. An examination shall be made to determine whether the packaging, packing, and marking comply with the requirements of section 3 of this specification. Defects shall be scored in accordance with table I. For examination of interior packaging, the sample unit shall be one shipping container identical to each item being packed, fully prepared for delivery, selected at random just prior to the closing operations. Sampling shall be in accordance with MIL-STD-105. Defects of closure listed shall be examined on shipping containers fully prepared for delivery. The lot size shall be the number of shipping containers in the end item inspection lot. The inspection level shall be S-2 with an AQL of 4.0 defects per hundred units.

TABLE I. Classification of defects

Examine	Defects
Markings	Omitted; incorrect; illegible; improper size, location, sequence, or method of application.
Material	Any component missing or damaged.
Workmanship	Inadequate application of components such as incomplete closure of container flaps, loose strapping, inadequate stapling, or distortion of container.
Contents	Gross weight exceeds the requirements of the box specification.

5. PREPARATION FOR DELIVERY. (Not applicable.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:52Z
Check the source to verify that this is the current version before use.

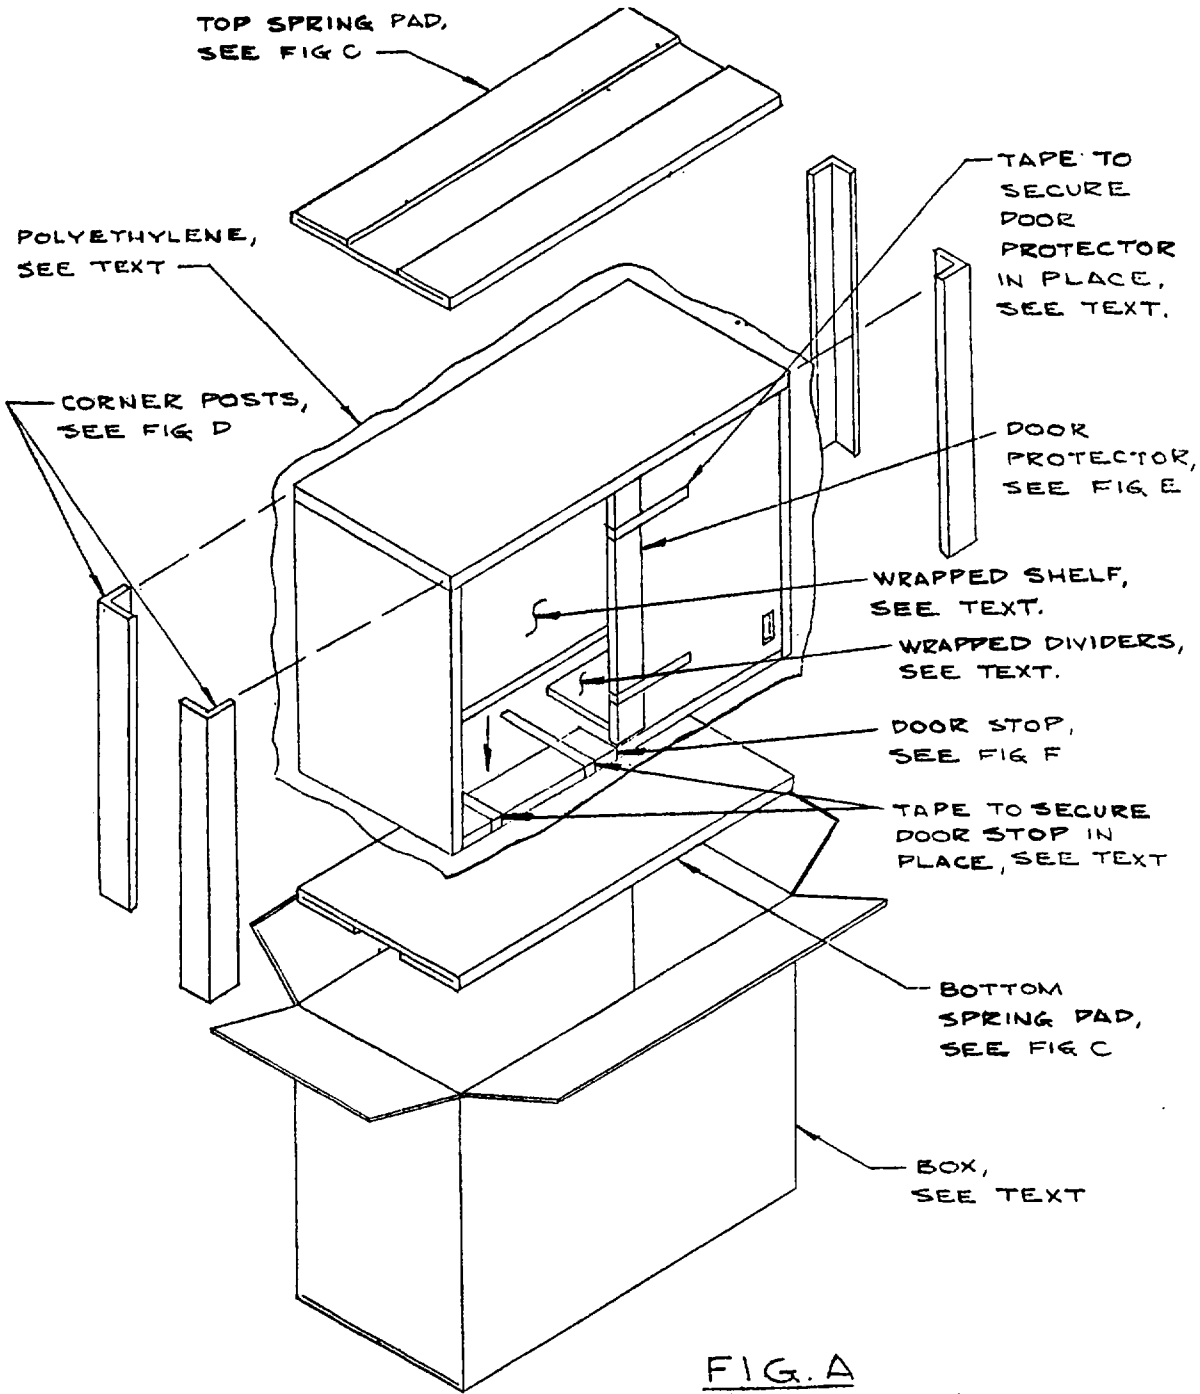


FIG. A

TYPICAL ASSEMBLY. PROVISIONS FOR DOOR & DIVIDER PKG SHALL APPLY ONLY WHERE APPLICABLE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:52Z
Check the source to verify that this is the current version before use.

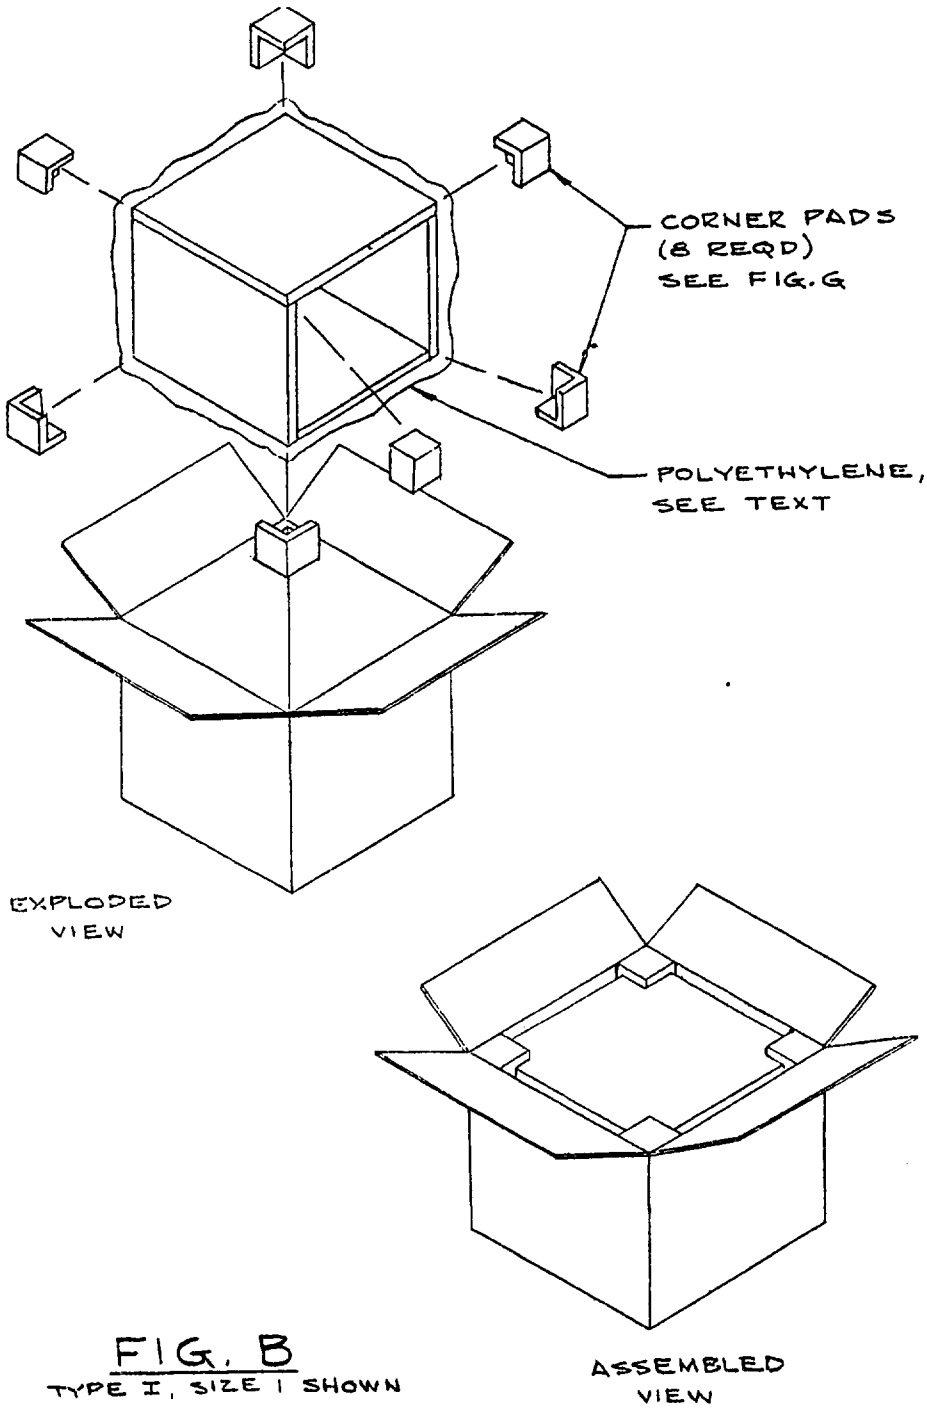


FIG. B
TYPE I, SIZE 1 SHOWN

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:52Z
Check the source to verify that this is the current version before use.

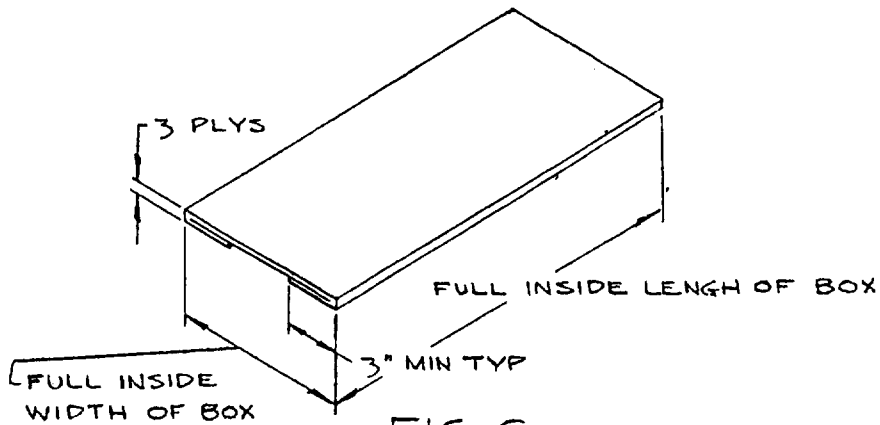


FIG. C
TOP & BOTTOM SPRING PADS

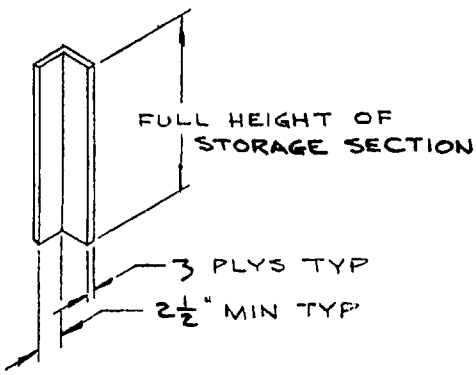


FIG. D
CORNER POST

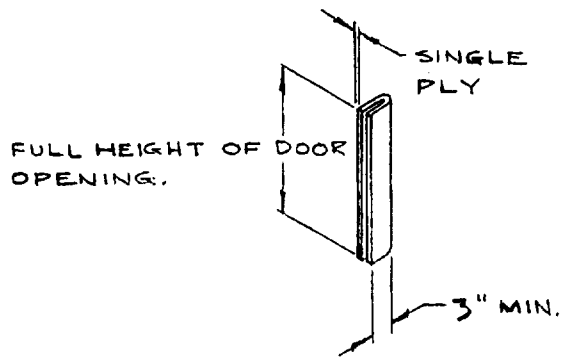


FIG. E
DOOR PROTECTOR

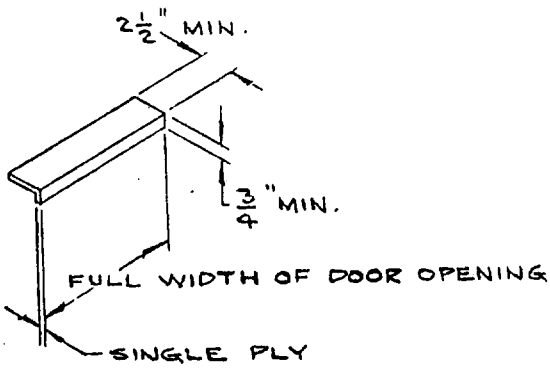


FIG. F
DOOR STOP

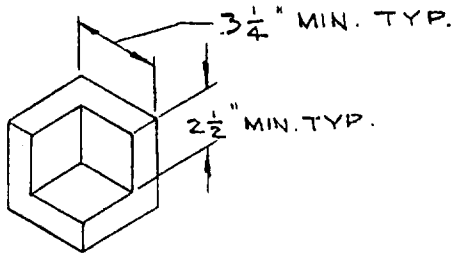


FIG. G
OPTIONAL CORNER PADS

NOTE:
INTERPRET ALL FIGURES IN ACCORDANCE WITH MIL-D-1000.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:52Z
Check the source to verify that this is the current version before use.

6. NOTES

6.1 Intended use. This specification covers the packaging, packing, and marking requirements for steel overfile storage sections as covered by AA-S-00710 and AA-S-001921. It is intended for application to assembly line mass-produced products.

6.2 Ordering data. Purchasers should select the preferred options permitted herein, and include the following information in procurement documents:

(a) Title, number, and date of this specification.
(b) Levels of packaging and packing required (see 3.1 and 3.2).
(c) Whether civil or military marking is required (see 3.3).

Preparing activity:

GSA-FSS

Orders for this publication are to be placed with General Services Administration, acting as an agent for the Superintendent of Documents. See Section 2 of this specification to obtain extra copies and other documents referenced herein. Price 30 cents each.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:52Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:52Z
Check the source to verify that this is the current version before use.