FEDERAL SPECIFICATION

PREPARATION FOR DELIVERY REQUIREMENTS FOR PARTITIONS, OFFICE, STEEL

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

1. SCOPE

1.1 This specification covers the packaging, packing, and marking requirements (see 6.1) for steel office partitions and applicable accessories covered by AA-P-00615.

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issues in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

Federal Specifications:

L-P-378 - Plastic Sheet and Strip, Thin Gauge Polyolefin.
UU-P-268 - Paper, Kraft, Wrapping.
PPP-B-566 - Boxes, Folding, Paperboard.
PPP-B-636 - Boxes, Shipping, Fiberboard.
PPP-B-665 - Boxes: Paperboard, Metal Edged and Components.
PPP-B-676 - Boxes, Setup.
PPP-B-1163- Box, Corrugated Fiberboard, High Compression Strength, Weather-resistant, Wax- resin Impregnated.
PPP-C-850 - Cushioning Material, Polystyrene, Expanded, Resilient (For Packaging Uses).
PPP-F-320 - Fiberboard; Corrugated and Solid, Sheet Stock (Continaer Grade), and Cut Shapes

Federal Standards:

Fed. Std. No. 123 - Marking for Shipment (Civil Agencies).
Fed. Std. No. 224 - Closing, Sealing and Reinforcing of Fiberboard Shipping Boxes, General Methods for.

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications and Standards and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued is for sale on a subscription basis by the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20402.

(Single copies of this specification and other Federal Specifications required by activities outside the Federal Government for bidding purposes are available without charge from Business Service Centers at the General Services Administration Regional Offices in Boston, New York, Washington, DC, Atlanta, Chicago, Kansas City, MO, Fort Worth, Denver, San Francisco, Los Angeles, and Seattle, WA.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications and Standards from established distribution points in their agencies.)

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:52Z
Check the source to verify that this is the current version before use.

Military Specifications:

MIL-D-1000 - Drawing, Engineering and Associated List.

Military Standards:

MIL-STD-129 - Marking for Shipment and Storage

(Copies of Military Specifications and Standards required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless a specific issue is identified, the issue in effect on date of invitation for bids or request for proposal shall apply.

National Motor Freight Traffic Association, Inc., Agent:

National Motor Freight Classification.

(Application for copies should be addressed to the American Trucking Associations, Inc., Tariff Order Section, 1616 P Street, N.W., Washington, DC 20036.)

Uniform Classification Committee, Agent:

Uniform Freight Classification.

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, IL 60606.)

3. REQUIREMENTS

3.1 Packaging. Packaging shall be level A or C as specified (see 6.2).

3.1.1 Level A.

3.1.1.1 Posts. Posts shall be wrapped or separated from each other with kraft paper conforming to UU-P-268 having a minimum basis weight of 30 pounds (24 x 36-500). Alternatively, the posts may be separated in the shipping container with full length pads between each post. The pads shall be constructed from material conforming to PPP-F-320, type CF, class domestic, variety SW, grade 200, minimum.

3.1.1.2 Side channels. Each side channel with glazing strip inserted, shall be wrapped in kraft paper, conforming to UU-P-268, having a minimum basis weight of 30 pounds (24 x 36-500).

3.1.1.3 Book shelves. Each shelf shall be wrapped in kraft paper conforming to UU-P-268 having a minimum basis weight of 30 pounds (24 x 36-500). Alternatively, each shelf shall be placed in a bag constructed from film conforming to L-P-378, type I, grade A, finish 1 with a minimum material thickness of 2 mils.

3.1.1.4 Floor anchors. Two anchors together with two 3/8 inch bolts, nuts and washers shall be packaged in a close-fitting box conforming to PPP-B-566, PPP-B-665, or PPP-B-676. Each box shall be secured to prevent accidental opening.

3.1.1.5 Wall brackets. Two wall brackets, together with a sufficient number of 3/8 inch bolts, nuts and washers necessary to properly attach the two wall brackets shall be packaged in a close-fitting box conforming to PPP-B-566, PPP-B-665, or PPP-B-676. Each box shall be secured to prevent accidental opening.

3.1.1.6 Glazing strips. Twenty-four strips, of like stock number, shall be wrapped in kraft paper conforming to UU-P-268, having a minimum basis weight of 30 pounds (24 x 36-500), or packaged in a snug-fitting fiberboard sleeve or wrap. The material for the sleeve or wrap shall conform to PPP-F-320, class domestic and shall be secured with pressure sensitive tape.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:52Z
Check the source to verify that this is the current version before use.

3.1.2 Level C. Components of partitions shall be packaged to insure protection against damage during shipment and safe delivery at destination, while complying with the common carrier rules as a minimum.

3.2 Packing. Packing shall be level A, B or C as specified (see 6.2).

3.2.1 Level A.

3.2.1.1 Posts. Four posts packaged as specified in 3.1 shall be packed in a close-fitting box conforming to PPP-B-636, class weather-resistant. Close and seal the box in accordance with the appendix to PPP-B-636.

3.2.1.2 Side channels. Ten channels packaged as specified in 3.1 shall be packed in a close-fitting box conforming to PPP-B-636, class weather resistant. Close and seal the box in accordance with the appendix to PPP-B-636.

3.2.1.3 Book shelves. Each shelf packaged as specified in 3.1 shall be packed in a close-fitting box conforming to PPP-B-636, class-weather resistant. Close and seal the box in accordance with the appendix to PPP-B-636.

3.2.1.4 Floor anchors. Fifteen unit packages (see 3.1) shall be packed in a close-fitting box conforming to PPP-B-636, class weather-resistant. Close and seal the box in accordance with the appendix to PPP-B-636.

3.2.1.5 Wall brackets. Fifteen unit packages (see 3.1) shall be packed in a close-fitting box conforming to PPP-B-636, class weather-resistant. Close and seal the box in accordance with the appendix to PPP-B-636.

3.2.1.6 Glazing strips. Four unit packages (see 3.1) of like stock number, shall be packed in a box conforming to PPP-B-636, class weather-resistant. Close and seal the box in accordance with the appendix to PPP-B-636.

3.2.1.7 Panels.

3.2.1.7.1 Steel panels. Unless otherwise specified, each panel shall be packed in a close-fitting box conforming to PPP-B-636, class weather-resistant, type CF, variety DW, grade V15c, style FPF or type CF, variety SW, grade W5c, style FOL. Dimensional requirements of the specification shall be waived. Each panel and stud connector shall be protected with a corner pad, constructed from material conforming to PPP-B-1163, class 1, or of preformed expanded polystyrene conforming to PPP-C-850, type 1, class 1 constructed in accordance with Figure 1. Closure of the container shall be by fully clinched staples or reinforced filament, gummed or pressure-sensitive tape or a combination thereof. When using tape, method 125 of Fed. Std. No. 224 shall be used except that tape shall be applied in C-shaped clips, rather than L-shaped clips and shall extend over the ends and open side a minimum of 3 inches on both the top and bottom of the container.

3.2.1.7.2 Glass panels. Unless otherwise specified, each panel shall be packed in a box conforming to PPP-B-636, class weather resistant, type CF, variety DW, grade V15c, style FPF or type CF, variety SW, grade W5c, style FOL. The box shall be not less than 2-1/4 inches deep and shall provide a minimum of 1 inch clearance between the panel and the inside of the box. The dimensional requirements of the box specification shall be waived. Each panel shall be protected by the use of blocks and pads fabricated to equal the inside depth of the box and shall provide for all corners and the two long edges of the panel as follows: The pads shall be 10 inches long, 2 inches wide, 2-1/4 inches high, and have a 1/4 inch wide slot cut into the cross section, approximately 1 inch deep to accommodate the glass panel. The corner pads (two in each corner) fabricated and slotted as above shall be 5 inches long, 2 inches wide and 2-1/4 inches high and shall be notched in such a manner as to provide a flush 90 degree corner. The material for these blocks and pads shall be built up layers of corrugated fiberboard conforming to PPP-F-320, class domestic, grade 200 or preformed expanded polystyrene conforming to PPP-C-850, type 1, class 1. Additional cushioning shall be provided for glass panels exceeding 36 inches in length as follows: Six pads, of material as described above, 8 inches long, 4 inches wide and approximately 1 inch thick shall be positioned three on each side of the glass panel, equidistant from the sides and ends of the box (directly opposite each other). All pads shall be held in place by means of glue or tape to prevent movement during shipment and handling. Closure of the container shall be by fully clinched staples or reinforced

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:52Z
Check the source to verify that this is the current version before use.

filament, gummed or pressure-sensitive adhesive tape or a combination thereof. When using tape, method 125 of Fed. Std. No. 224 shall be used except that tape shall be applied in C-shaped clips, rather than L-shaped clips and shall extend over the ends and open side a minimum of 3 inches on both the top and bottom of the container.

3.2.1.7.3 Plastic panels. Unless otherwise specified, each panel shall be inserted in a snug-fitting fiberboard sandwich-type container constructed from one piece of fiberboard, type CF, class weather resistant, variety SW, grade W5c, conforming to PPP-F-320. The length of the fiberboard sheet shall be of a size to permit folding in the middle with a double scouring of sufficient width to provide a snug fit to the metal edge of the plastic panel and to extend beyond the width of the panel a minimum of 2-1/4 inches. The width of the fiberboard sheet shall be a minimum of 5-1/2 inches greater than the length of the panel. The plastic panel shall be secured in the folded container with fully clinched staples. The staples shall be located a minimum of 1/2 inch from the edges and spaced a maximum of 4 inches apart around all openings.

3.2.2 Level B.

3.2.2.1 Posts. Four posts packaged as specified in 3.1, shall be packed as specified in 3.2.1.1 except that the box shall conform to PPP-B-636, class domestic and the closure shall be in accordance with method II of the appendix to PPP-B-636.

3.2.2.2 Side channels. Ten channels packaged as specified in 3.1 shall be packed as specified in 3.2.1.2 except that the box shall conform to PPP-B-636, class domestic, and the closure shall be in accordance with method II of the appendix to PPP-B-636.

3.2.2.3 Book shelves. Each shelf packaged as specified in 3.1 shall be packed as specified in 3.2.1.3 except that the box shall conform to PPP-B-636, class domestic, and the closure shall be in accordance with method II of the appendix to PPP-B-636.

3.2.2.4 Floor anchors. Fifteen unit packages (see 3.1) shall be packed as specified in 3.2.1.4 except that the box shall conform to PPP-B-636, class domestic, and the closure shall be in accordance with method II of the appendix to PPP-B-636.

3.2.2.5 Wall brackets. Fifteen unit packages (see 3.1) shall be packed as specified in 3.2.1.5 except that the box shall conform to PPP-B-636, class domestic, and the closure shall be in accordance with method II of the appendix to PPP-B-636.

3.2.2.6 Glazing strips. Four unit packages, packaged as specified in 3.1 shall be packed as specified in 3.2.1.6 except that the box shall conform to PPP-B-636, class domestic, and the closure shall be in accordance with method II of the appendix to PPP-B-636.

3.2.2.7 Panels.

3.2.2.7.1 Steel panels. Unless otherwise specified, the panels shall be individually packed as specified in 3.2.1.7.1, except that the box shall conform to PPP-B-636, class domestic, type CF, variety DW, grade 275, style FPF or type CF, variety SW, grade 275, style FOL, and the closure shall be in accordance with the appendix to PPP-B-636.

3.2.2.7.2 Glass panels. Unless otherwise specified, the panels shall be individually packed as specified in 3.2.1.7.2, except that the box shall conform to PPP-B-636, class domestic, type CF, variety DW, grade 275, style FPF or type CF, variety SW, grade 275, style FOL, and the closure shall be in accordance with method II of the appendix to PPP-B-636.

3.2.2.7.3 Plastic panels. Unless otherwise specified, the panels shall be individually packed as specified in 3.2.1.7.3, except that the container shall be constructed from one sheet of fiberboard, type CF, class-domestic, variety SW, grade 275, conforming to PPP-F-320.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:52Z
Check the source to verify that this is the current version before use.

3.2.3 Level C. Components of partitions, packaged as specified in 3.1.2 shall be packed in containers in compliance with the Uniform Freight Classification rules or the National Motor Freight Classification rules.

3.3 Marking. Marking shall be in accordance with 3.3.1 or 3.3.2 as specified (see 6.2).

3.3.1 Civil agencies. In addition to the special marking (when applicable) specified in 3.3.3, all interior packages and shipping containers shall be marked in accordance with Fed. Std. No. 123.

3.3.2 Military agencies. In addition to the special marking (when applicable) specified in 3.3.3, all interior packages and shipping containers shall be marked in accordance with MIL-STD-129.

3.3.3 Special marking. In addition to the markings required by 3.3.1 or 3.3.2, shipping containers for individually packed glass and plastic panels shall be marked on both sides as follows:

GLASS: "GLASS-HANDLE WITH CARE" (in characters a minimum of 2 inches high)

PLASTIC: "PLASTIC-HANDLE WITH CARE" (in characters a minimum of 2 inches high)

ON BOTH: "SHIP AND STORE ON EDGE" (in characters a minimum of 1 inch high with arrows pointing to the outer edges of the box, a minimum of 4 inches high.)

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.2 Examination. An examination shall be made to determine whether the packaging, packing and marking comply with the requirements of section 3 of this specification. Defects shall be scored in accordance with table I. For examination of interior packaging, the sample unit shall be one shipping container identical to each item being packed, fully prepared for delivery, selected at random just prior to the closing operations. Sampling shall be in accordance with MIL-STD-105. Defects of closure shall be examined on shipping containers fully prepared for delivery. The lot size shall be the number of shipping containers in the end item inspection lot. The inspection level shall be S-2 with an AQL of 4.0 defects per hundred units.

TABLE I. Classification of defects

Examine	Defects
Markings	Omitted; incorrect; illegible; improper size, location, sequence, or method of application.
Material	Any component missing or damaged.
Workmanship	Inadequate application of components such as incomplete closure of container flaps, loose strapping, inadequate stapling, or distortion of container.
Contents	Gross weight exceeds the requirements of the box specification (when applicable).

5. PREPARATION FOR DELIVERY. Not applicable.

6. NOTES

6.1 Intended use. This specification covers the packaging, packing and marking requirements for steel office partitions and applicable accessories. It is intended for application to assembly line mass-produced products.


Source: https://assist.dla.mil -- Downloaded: 202610-26T12:52Z
Check the source to verify that this is the current version before use.

6.2 Ordering data. Purchasers should select the preferred options permitted herein, and include the following information in procurement documents.

(a) Title, number, and date of this specification.
(b) Levels of packaging and packing required (see 3.1 and 3.2).
(c) Whether civil or military marking is required (see 3.3).

Preparing activity:

GSA-FSS

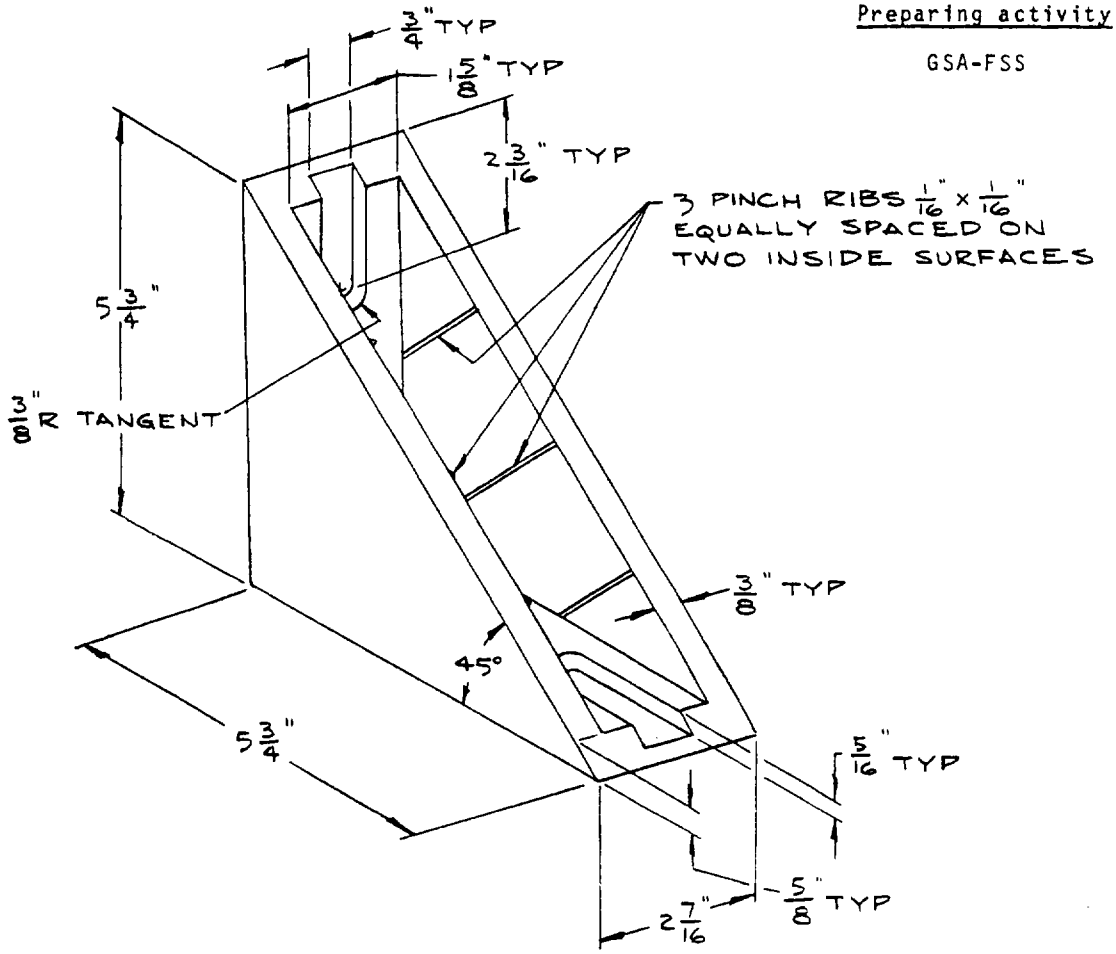

NOTES:
INTERPRET DRAWING IN ACCORDANCE WITH MIL-D-1000.
MAXIMUM DRAFT ANGLE ON ALL DIMENSIONS SHALL BE 2°.

FIGURE 1

Orders for this publication are to be placed with General Services Administration, acting as an agent for the Superintendent of Documents. See Section 2 of this specification to obtain extra copies and other documents referenced herein. Price 30 cents each.

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:52Z
Check the source to verify that this is the current version before use.