INCH - POUND
MIL-PRF-32111
8 October 2002

PERFORMANCE SPECIFICATION

SPACE HEATER LARGE - RADIANT, NON-POWERED, LIQUID & SOLID FUEL

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the performance and acceptance requirements for two non-powered, liquid and solid fuel burning, portable, radiant space heaters, and accessories.

1.2 Classification.
Type I – Liquid Fuel Burning Space Heater Large (SHL), 80,000 BTU.
Type II – Solid Fuel Burning Space Heater Large (SHL), 80,000 BTU.

2. APPLICABLE DOCUMENTS

2.1 General. The documents listed in this section are specified in sections 3 and 4 of this specification. This section does not include documents cited in other sections of this specification or recommended for additional information or as examples. While every effort has been made to ensure the completeness of this list, document users are cautioned that they must meet all specified requirements documents cited in sections 3 and 4 of this specification, whether or not they are listed.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commander, U.S. Army Natick Research, Development, and Engineering Center, Natick, MA 01760-5018 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document, or by letter.

AMSC N/A FSC 4520

Distribution Statement A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:47Z
Check the source to verify that this is the current version before use.

2.2 Government Documents.

Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of the documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DoDISS) cited in the solicitation. Unless otherwise specified, the issues of documents not listed in the DoDISS are the issues of the documents cited in the solicitation (see 6.2).

STANDARDS

DEPARTMENT OF DEFENSE

MIL-STD-810 - Environmental Test Methods and Engineering Guidelines.

MIL-PRF-32023 - Adapter Kit - Gravity Feed, for 5-Gallon Military Fuel Can.

(Unless otherwise indicated, copies of the above standard are available from the Standardization Document Order Desk, 700 Robbins Avenue, Building 4D, Philadelphia, PA 19111-5094).

3. REQUIREMENTS

3.1 First Article. When specified (see 6.2), a sample shall be subjected to a first article inspection in accordance with 4.1.

3.2 Conformance. When specified (see 6.2), a sample shall be subjected to conformance inspection in accordance with 4.1.

3.3 Operating Requirements. Each heater shall satisfy the following user-oriented requirements:

3.3.1 Operation. The heaters shall operate safely with all specified fuels, listed in Table I, and under all specified conditions herein with no electrical power.

3.3.2 Burner. There shall be no exposure of flame during any mode of operation. There shall be no pool of raw liquid fuel in the burner area during operation or in the case of accidental flame loss.

3.3.3 Ignition. The heaters shall not require any electrical power for ignition. Ignition shall be accomplished safely in ten minutes or less with the use of a match.

3.3.4 Monitoring. The heaters shall incorporate a sight glass or other means for viewing the entire combustion flame during operation. The heaters shall incorporate a captive cover, which can be removed and replaced over the viewing area for black out conditions with out the use of tools.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:47Z
Check the source to verify that this is the current version before use.

3.3.5 Liquid Fuel. The heater shall be safely operated with all of the fuels listed in Table I.

TABLE I. Compatible Fuels

Ambient Temperature Range	Military Symbol CONUS	National Stock Number (NSN)
Above +25°F	DF-2	9140-00-286-5294
Above +10°F	DF-1	9140-00-286-5286
Above -60°F	JP-8	9130-01-031-5816
Above -60°F	DFA	9140-00-286-5283

3.3.6 Fuel Control. The heaters shall have a fuel control that maintains a constant flow rate to the burner from a gravity feed fuel supply. The fuel control shall have a metering knob to control flow rate incrementally and shall have a minimum of seven settings. The fuel control shall have a fuel type selector knob (3 positions maximum), if necessary, which allows the operator to accommodate for varying ambient temperatures and for the different fuels listed in Table I. The fuel control shall be adjustable during operation while wearing cold weather gloves NSN 8415-00-227-1220. The fuel control shall provide sufficient fuel flow to achieve the full range of required heat outputs corresponding to Table II. The fuel control shall be permanently labeled to identify settings and corresponding fuel types. The fuel control shall control fuel flow to the burner to eliminate any possibility of an unsafe over fire condition when operated at the proper settings for the prevailing ambient temperatures and fuel types. The fuel control shall control the firing rate in conjunction with the heaters, such that, smoke levels do not exceed a #4 on the Bacharach smoke scale, for over 40% of the full range of settings. The fuel control shall have a heat shield if necessary to prevent excessive warming of the valve (above 110°F for JP8 with and ambient of 40°F) and consequent changes in the flow rate to the heater.

3.3.7 Automatic Fuel Shut Off Capability. Fuel flow shall stop entering the combustion area during accidental flame loss. Fuel flow shall also not enter the combustion area if a full inverted fuel can is connected to the heater with the fuel control in the on position. At no time shall there be a puddle of raw fuel inside the burner area.

3.3.8 On/Off Switch. A single on/off switch shall be located on the fuel control and shall start and stop fuel flow to the burner.

3.3.9 Fuel Filter. The filter shall eliminate foreign particles from obstructing fuel flow. The filter shall be located within a protected area on the fuel control and shall be located to allow for 15-minute removal, cleaning and installation of filter element using only common hand tools. The filter shall not require the use of a sealer to obtain a leak free fit. The filter

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:47Z
Check the source to verify that this is the current version before use.

housing shall be of a design that shall not break due to freezing of entrapped water. The filter element shall not rust.

3.3.10 Solid Fuel Operation.

3.3.10.1 Type II Heater. Type II heater shall contain all components and accessories required for combustion of solid fuel (wood or coal). All required components shall be packable inside the heater body. Firing rate shall be controllable through manual regulation of combustion air. The solid fuel burning area shall allow for placement of at least .35 cubic feet of solid fuel with an opening large enough to accumulate a 16" long by 4" diameter pieces of wood. The Type II heater shall be capable of conversion to liquid fuel operation with the addition of a liquid fuel burner kit.

3.3.10.2 Type I Heater. Type I heater shall be capable of conversion to solid fuel operation with the addition of a solid fuel burning kit. The requirement for a solid fuel burning kit will be called out in acquisition documents (see 6.2)

3.3.11 Combustion Efficiency. Type I heater shall have a combustion efficiency greater than 50% when operated at 60,000 BTU/hr or higher, with liquid fuels.

3.3.12 Smoke Readings. The smoke reading of the heaters shall not be greater than a # 4 on the Bacharach smoke scale when operated between the ranges listed in Table II.

3.3.13 Heat Output. The heaters shall provide the minimum BTU ranges listed in Table II ±5 KBTU.

TABLE II Heat Output Requirements

Ambient Temp (F)	Fuel	Type I (Low) (BTU/Hr)	Type I (High) (BTU/hr)
40	DF2/JP8	30,000	60,000
-25	JP8	40,000	80,000
-60	JP8	40,000	80,000

3.3.14 Exhaust Pipe. The exhaust pipe shall be nestable for storage inside the heater body. Each section shall be permanently numbered sequentially corresponding to order of assembly. The diameter of the exhaust pipe shall be sized to fit through the 5 inch diameter stove pipe openings of the Military tents. The exhaust pipe shall be between 150 inches and 170 inches when assembled on the heater. The exhaust pipe seams shall be permanent and shall not require operator assembly. All heater exhaust gases shall be discharged vertically to exit through the stovepipe opening on the tents. The exhaust pipe shall include a stack cap

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:47Z
Check the source to verify that this is the current version before use.

with guy lines to secure pipe in high winds and to prevent down drafts. The exhaust pipe and stack cap exterior shall have a surface finish that reduces reflective glare.

3.3.15 Tilt During Operation. The heater shall operate at 5 degrees tilted in any direction without causing safety hazard or performance degradation.

3.3.16 Fuel Lines And Fittings. A gravity feed fuel supply line (MIL-PRF-32023) shall be supplied and shall be easily connected and disconnected to the heater fuel control and gravity feed adapter on the 5-gallon fuel can. The gravity feed adapter uses a Parker Hannifin, Inc. female hose coupler part number B20-5BP-690, which the fuel supply line shall mate with. The gravity feed fuel supply line shall not leak fuel when disconnected from the fuel control while connected to a full inverted 5-gallon fuel can. The short fuel line from the fuel control to the burner shall be easily connected for operation with cold weather gloves. Fuel lines, fittings, and controls shall be sufficiently isolated from the combustion chamber and high heat areas to prevent being adversely affected from heat. Fittings shall not leak and shall be compatible with all fuels and environmental extremes specified herein.

3.3.17 Gaskets And Seals. All gaskets, seals, etc., shall be suitable for use with specified fuels under all climatic categories specified herein.

3.3.18 Accessories. The Type I heater shall include the following accessories as required to meet this performance specification: Exhaust pipe assembly, fuel control, plastic gravity feed adapter kit (NSN 4520-01-466-0415), a fuel can stand which supports two full plastic fuel cans (NSN 4520-01-465-4430) in an inverted position with the outlet a minimum of 25 inches from the ground, gravity fuel feed hose with inline valve for priming, y-adapter, overflow hose, stack cap, solid fuel burning components, manual, priming cup (secured to fuel hose), burner cleaning device, fuel spill containment mats for heater and fuel cans, and heater stand to elevate heater off the tent floor. All accessories shall be storable inside the heater body. All accessories for Type I heater, except for the solid fuel burning components, shall be required unless otherwise specified in the acquisition documents (see 6.2). The Type II heater shall contain all accessory components required to burn solid fuel.

3.3.18.1 Fuel Spill Containment Mats. Fuel spill containment mats shall be provided for placement under the fuel cans and heater. The fuel spill containment mats shall be fuel resistant, non-flammable, and non-wicking/non-absorbent. They should be functional in a continuous temperature range of -65°F to 500°F and should be foldable for storage inside the heater body for transport. The fuel mat under the heater shall be a minimum of 21.5” by 27.5” and shall be able to retain approximately 0.25 liters of fuel. The fuel mat under the tri-pod fuel can stand shall be at least 31” by 35” by 5” and shall contain 4 liters of fuel.

3.3.19 Heater Body Surface. The heater body outside surface shall inhibit rust and flaking either through material selection or surface treatment with a high temperature paint or coating.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:47Z
Check the source to verify that this is the current version before use.

3.3.20 Bottom Surface. The heater shall have provisions (feet or base stand) to allow for operation on a snow packed surface without degrading performance or safety. Both heaters shall have provisions to reduce sliding when operated on a packed snow or ice surface and shall have provisions to prevent tearing of fabric tent floors. Any surface on the heater bottom, which comes in contact with the tent floor, shall not get hotter than 150° F during operation.

3.3.21 Safety. The heater and its components shall perform in all modes of operation in a safe manner. All equipment shall include fail-safe features for safety of personnel during installation, operation, maintenance, and repair activities. The heater configuration shall eliminate the possibility of improper assembly of components (i.e. burner assembly, fuel control) which may lead to a hazardous condition.

3.3.21.1 Breathable Air. Products of combustion shall remain separated from the breathable heated air. Heated air inside the tent shall be within the American Conference of Governmental Hygienists (ACGIH) 8-hour Threshold Limit Values-Time Weighted Average (TLV-TWA) for carbon dioxide, carbon monoxide, and hydrocarbon based combustible gases.

3.3.21.2 Sharp Edges. Non-functional sharp edges and projections shall be eliminated.

3.3.21.3 Noise. Noise levels, as measured from 3 feet from the heater, shall not exceed 60 dB.

3.4 Support Or Ownership Requirements.

3.4.1 Weight. The weight of the heater without accessories shall be less than 50 pounds for the Type I & II heaters. The heater and all accessories shall not exceed 80 pounds for Type I & II heaters.

3.4.2 Volume. The outside dimensions of the heater shall not exceed 4 cubic feet for both Type I & II heaters when in the packed for storage or transport configuration. The overall height of the heater body, excluding exhaust pipe, shall be 30 inches or less for both Type I & II heaters.

3.4.3 Mean Time Between Essential Function Failure (MTBEFF)/Maintenance Ratio(MR). The heaters shall meet a quantitative reliability requirement MTBEFF of 615 hours. The heater essential functions are heating air sufficient to maintain a minimum 50° F temperature inside a tent having 300 to 400 square feet of floor area at –25° F ambient temperatures, and circulating heated air in the tent without the use of external power (using the Thermo-Electric Fan). An essential function failure (EFF) shall be scored when an incident results in the loss or significant degradation of an essential function that can not be quickly (within 15 minutes) corrected by the crew using only on board tools, spares and repair parts. An incident that causes catastrophic or critical hazards shall also be scored as an EFF. The

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:47Z
Check the source to verify that this is the current version before use.

heater maintainability requirement is a total unit, direct support (DS), general support (GS) MR which shall not to exceed 0.0016 maintenance man-hour per operating hour, not including preventive maintenance checks and services (PMCS).

3.4.4 Preventive Maintenance Checks And Services (PMCS). The heater fuel lines and burner shall be designed in such a manner to allow for operator inspection. PMCS shall not exceed 10 minutes time to accomplish. The minimum PMCS items to be checked shall be secure connections of lines, fuel leaks, exhaust obstructions, burner, and general condition to permit operation. There shall be no new specific test, measurement and diagnostic equipment or special tools to repair or maintain the heater.

3.4.5 Transportability. The heaters shall be of sufficient durability to be transportable in the High Mobility Multipurpose Wheeled Vehicle (HMMWV), heavy-HMMWV, the Commercial Utility Cargo Vehicle (CUCV), and standard Army cargo trucks (2 1/2 to 5 ton) and all standard Army cargo trailers having a 3 to 12 ton capacity.

3.4.6 Loose Cargo. The heaters shall be of sufficient durability to be transported as loose cargo in any of the required transport vehicles.

3.4.7 Drop. The heaters shall be of sufficient durability to survive an accidental drop from any of the required transport vehicles.

3.4.8 Fasteners. Any external fasteners, which require removal for normal operation, shall be captive, limiting loss in snow or dark conditions.

3.4.9 Labels/Tags. The heaters shall have an instruction plate permanently attached in an immediately obvious location that provides warnings, start up and shut down procedures, operating procedures, and safety cautions. The fuel control and heater lettering shall be permanent for the life of the item. Controls shall not obscure labels. Labels shall be located in a consistent manner throughout the system. Labels shall be printed in capitals. All letters shall be black except for when using a black background the letters shall be white. Letter size and width shall be sufficient to be easily read from a distance of six feet in daylight or with the aid of a flashlight. If the heater weighs more than 35 lbs. it shall be labeled TWO PERSON LIFT.

3.4.10 Set Up. The heater shall be capable of being assembled for operation in 20 minutes or less, and disassembled and repacked for storage by two people in 15 minutes or less in any climatic category specified herein.

3.5 Environmental Requirements.

3.5.1 Storage. The heater and accessories shall remain operable and show no signs of impairment due to storage at 155° F for 4 hours daily.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:47Z
Check the source to verify that this is the current version before use.

3.5.2 Basic Climate Operation. The heaters and accessories shall be operable in temperatures of plus 60° F to 0°F. Heat outputs shall be in accordance with Table II.

3.5.3 Basic Cold Operation. The heater and accessories shall be operable in temperatures of minus 5°F to minus 25°F. Heat outputs shall be in accordance with Table II.

3.5.4 Severe Cold Climate Operation. The heater and accessories shall be operable and maintainable in temperatures down to minus 60°F. Heat outputs shall be in accordance with Table II.

3.5.5 Severe Cold Manipulation. The heater shall be compatible with temperatures of minus 60°F allowing unpacking and set up for operation in the respective tents, and packing for storage. Fuel hose and hose couplers shall remain flexible and operational.

3.5.6 High Altitude. The heaters shall operate safely at a minimum of 85% rated capacity when operated at altitudes of 4,000 feet above sea level. The heater shall display no signs of backfiring, sputtering or pulsing at high altitude.

3.6 Interface Requirements.

3.6.1 Tent Interface. The Type I & II heaters shall be operable inside the MGPTS (Modular General Purpose Tent System). Fuel shall be routed to the heater from outside the tent using the 5-gallon fuel can (NSN 7240-01-337-5269), gravity feed adapter, fuel can stand and the gravity feed fuel supply line. The fuel shall be located a minimum of 4 feet from the tent wall. Special consideration shall be given to the heater shape and location of exhaust pipe and controls to prevent damage or fire to any tent fabric that may come into contact with the enclosure and related components during movement of the tent walls in wind gust conditions. The exhaust pipe shall be secured by guylines from the stack cap to ground stakes or the sidewalls of the tent.

3.6.2 Fuel Interface. The gravity fuel line shall be easily connected and disconnected to the heater fuel control and gravity feed adapter on the 5-gallon fuel can. The gravity feed adapter shall mate with the fuel supply line. The gravity feed fuel supply line shall not leak fuel when disconnected from the fuel control while connected to a full inverted 5-gallon fuel can. The short fuel line from the fuel control to the burner shall be easily connected for operation with cold weather gloves. Fuel lines, fittings, and controls shall be sufficiently isolated from the combustion chamber and high heat areas to prevent being adversely affected from heat. Fittings shall not leak and shall be compatible with all fuels and environmental extremes specified herein.

3.6.3 Thermo-Electric Fan (TEF) Interface. The heater shall accommodate placement of the thermo-electric fan unit (see Figure 1 of Appendix B), so that it is positioned to direct air downward. An indented area shall be provided for placement of the base of the fan (see Figure 2 of Appendix B). The indented area shall provide sufficient heat transfer to the fan

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:47Z
Check the source to verify that this is the current version before use.

base to achieve a temperature of 500° F – 600°F at the fan module surface. If necessary, a spacer shall be permanently located on the indented area to position the fan base above the heater surface to prevent over heat damage, while maintaining enough heat to achieve the required module temperature.

3.6.4 Field Serviceability. Periodic cleaning of the fuel control filter element and gaining access to the burner area for cleaning shall be accomplished within the operational environment by MOS nonspecific personnel wearing anti-contact gloves NSN 8415-00-227-1220 within 15 minutes. The heater shall not require specific test, measurement, & diagnostic equipment nor any special tools to repair or maintain the heater. Fielding shall have no impact on the manpower or personnel structure.

4. VERIFICATION

4.1 Classification Of Inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.1.1).
b. Conformance inspection (see 4.1.2).
c. End item inspection (see 4.1.3).

4.1.1 First Article Inspection. When a first article inspection is required (see 3.1 and 6.2), the heater shall undergo the tests and examinations outlined in Table III. Sampling for first article inspection shall be as specified in the contract or purchase order.

4.1.2 Conformance Inspection. Conformance inspections shall be conducted according to the tests specified in Table III. Sampling for conformance inspection shall be as specified in the contract or purchase order (see 3.3 and 6.2).

4.1.3 End Item Examination. Each heater shall be examined for the requirements specified in Table III. Any redesign or modification of the contractor's product to comply with specified requirements, or any necessary redesign or modification following failure to meet the specified requirements shall receive particular attention for adequacy and suitability. This element of inspection shall encompass all visual examination and dimensional measurements. Non-compliance with any specified requirement, absence of components, or presence of one or more defects shall constitute cause for rejection.

4.2 Verification Methods. Verification methods can include visual examination, measurement, testing, simulation, modeling, engineering evaluation, component properties analysis, certification, and similarity to previously approved or previously qualified designs.

4.2.1 Verification Alternatives. The contractor may propose alternative test methods, techniques, or equipment, including application of statistical process control, tool control, or cost-effective sampling procedures to verify performance.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:47Z
Check the source to verify that this is the current version before use.

TABLE III Requirement and Verification Outline

Requirement	Requirement Paragraph	Verification paragraph	First article inspection	Conformance inspection	End item examination
Operating Requirements	**3.3**	**4.3**			
Operation	3.3.1	4.3.1	X	X	
Burner	3.3.2	4.3.2	X	X	
Ignition	3.3.3	4.3.3	X	X	
Monitoring	3.3.4	4.3.4	X	X	
Liquid fuel	3.3.5	4.3.5	X	X	
Fuel control	3.3.6	4.3.6	X	X	
Auto Fuel Shut Off	3.3.7	4.3.7	X	X	
On/Off switch	3.3.8	4.3.8	X	X	
Fuel filter	3.3.9	4.3.9	X	X	
Solid fuel operation	3.3.10	4.3.10	X		
Combustion efficiency	3.3.11	4.3.11	X	X	
Smoke readings	3.3.12	4.3.12	X	X	
Heat output	3.3.13	4.3.13	X	X	
Exhaust pipe	3.3.14	4.3.14	X	X	
Tilt during operation	3.3.15	4.3.15	X	X	
Fuel lines and fittings	3.3.16	4.3.16	X	X	X
Gaskets and Seals	3.3.17	4.3.17	X	X	X
Accessories	3.3.18	4.3.18	X	X	X
Fuel spill containment mats	3.3.18.1	4.3.18.1	X	X	X
Heater body surface	3.3.19	4.3.19	X	X	
Bottom surface	3.3.20	4.3.20	X	X	
Safety	3.3.21	4.3.21	X	X	
Breathable air	3.3.21.1	4.3.21.1	X	X	
Sharp edges	3.3.21.2	4.3.21.2	X	X	X
Noise	3.3.21.3	4.3.21.3	X	X	
Support or ownership requirements	**3.4**	**4.4**			
Weight	3.4.1	4.4.1	X	X	
Volume	3.4.2	4.4.2	X	X	
MTBEFF/MR	3.4.3	4.4.3	X		
PMCS	3.4.4	4.4.4	X		
Transportability	3.4.5	4.4.5	X		
Loose cargo	3.4.6	4.4.6	X		
Drop	3.4.7	4.4.7	X		
Fasteners	3.4.8	4.4.8	X	X	X
Labels/tags	3.4.9	4.4.9	X	X	X
Set up	3.4.10	4.4.10	X	X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:47Z
Check the source to verify that this is the current version before use.

TABLE III Requirement and Verification Outline – Continued

Requirement	Requirement Paragraph	Verification paragraph	First article inspection	Conformance inspection	End item examination
Environmental Requirements	**3.5**	**4.5**			
Storage	3.5.1	4.5.1	X		
Basic climate operation	3.5.2	4.5.2	X		
Basic cold operation	3.5.3	4.5.3	X	X	
Severe cold climate operation	3.5.4	4.5.4	X		
Severe cold manipulation	3.5.5	4.5.5			
High Altitude	3.5.6	4.5.6			
Interface Requirements	**3.6**	**4.6**			
Tent interface	3.6.1	4.6.1	X		
Fuel interface	3.6.2	4.6.2	X		
TEF interface	3.6.3	4.6.3	X	X	
Field serviceability	3.6.4	4.6.4	X		

4.3 Operating Requirements Verification. All operating requirements shall be verified as follows:

4.3.1 Operation. Verify safe operation during all performance and reliability testing specified herein. Any use of electrical power, failure to operate with specified fuels shall constitute a failure.

4.3.2 Burner. Verify no raw fuel accumulates in the combustion area or around heater during operation or after shut down. Any fuel accumulation in such a matter shall constitute a failure.

4.3.3 Ignition. Observe heater on start. Failure to start using a match as an ignition source, and failure of the heater to be operating within specified smoke and efficiency readings within 15 minutes after lighting under any environmental condition specified herein, shall constitute a failure.

4.3.4 Monitoring. Observe the heater during operation. Absence of a sight glass shall constitute a failure. Absence of a captive cover for the sight glass shall constitute a failure. Inability to view entire flame through the sightglass shall constitute a failure.

4.3.5 Liquid Fuel. Verify fuel compatibility with DF-2 and JP-8 during environmental testing of 4.5.2, 4.5.3, and 4.5.4.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:47Z
Check the source to verify that this is the current version before use.

4.3.6 Fuel Control. Determine adequacy of the fuel control during environmental testing of 4.5.2, 4.5.3, and 4.5.4. Operate the heater over the full range of settings. Measure heat output as outlined in Appendix A for each setting. Failure of the flow rate and heat output to incrementally increase shall constitute a test failure. Measure the smoke level per Appendix A for each setting. Any smoke readings greater than #4 for over 40% of the range of settings shall constitute a failure. Presence of an unsafe overfire condition during testing as evidenced by black smoke exiting the exhaust stack, pulsing, sputtering or backfiring of the heater or excessive sooting shall constitute a failure. Absence of fuel type labeling with corresponding fuel type settings shall constitute a failure. During test of 4.6.2, measure flow rate to the heater at setting 5 after 1 hour of operation and record. After one more hour of operation at a constant ambient temperature with the tent doors closed and at a fuel control setting of five, measure the flow rate to the heater. An increase greater than 10% over the previous reading shall constitute a failure. Measure the temperature on the outside surface of the fuel control valve inside the heat shield. Any temperature reading above 110°F, for JP-8 with an ambient temperature of 40°F or more, shall constitute a failure.

4.3.7 Automatic Fuel Shut Off Capability. Configure the heater for operation with a full 5-gallon inverted fuel can and with the on/off switch in the off position. Turn the fuel control to the on position. Any fuel flow entering the combustion area or any volume of fuel in the burner area shall constitute a failure.

4.3.8 On/Off Switch. Connect a buret in-line with the gravity feed fuel supply line. After the heater has been operating for a minimum of 10 minutes, turn the on/off switch to the off position and observe flow rate in the buret. Failure of fuel flow to stop immediately upon activation of the off switch shall constitute a failure.

4.3.9 Fuel Filter. Observe filter condition after reliability testing. Any rusting of filter or heater shut downs related to particles by-passing the fuel filter shall constitute a failure. Verify 15 minute removal, cleaning and replacement during field serviceability testing 4.5.4. Failure to remove and replace the filtering device for cleaning in less than 15 minutes using only common hand tools shall constitute a failure.

4.3.10 Solid Fuel Operation. Visually inspect the Type II heater for solid fuel burning components stored inside heater body. Operate the heater with wood or coal for a minimum of 1 hour. Inability to operate on wood or coal, presence of any hazardous condition due to solid fuel operation or inability to regulate flame through control of combustion air intake shall constitute a failure. Verify the solid fuel burning area meets the wood capacity and dimensional requirements of 3.3.10. Verify that the type II heater can burn liquid fuel with the addition of a liquid fuel conversion kit. Also verify that the Type I heater can burn solid fuel with the addition of a solid fuel conversion kit. Inability for either heater to meet the above mentioned shall constitute a failure.

4.3.11 Combustion Efficiency. During environmental testing of 4.6.2, 4.6.3 and 4.6.4, after durability testing, every 24 hours during reliability testing, and as required, measure efficiency per procedure outlined in Appendix A. Any readings lower than 50% while the

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:47Z
Check the source to verify that this is the current version before use.

Type I heater is operating at 60,000 BTU/Hr or higher shall constitute a test failure.

4.3.12 Smoke Readings. During environmental testing of 4.6.2, 4.6.3 and 4.6.4, after durability testing, and every 24 hours during reliability testing, measure smoke readings per procedure outlined in Appendix A. Any readings greater than a #4 during any required firing rate shall constitute a failure.

4.3.13 Heat Output. See 4.5.2, 4.5.3 and 4.5.4.

4.3.14 Exhaust Pipe. Inspect heater during operation and verify that the exhaust pipe passes through the opening in the required tent for each heater. Verify that the pipe fits inside the heater body with accessories for storage. Verify the presence of an exhaust pipe cap with guy lines or other means to keep exhaust pipe from blowing off in windy conditions. Verify the exhaust pipe fits properly with no exhaust leaks and conforms to the height requirements of 3.3.14.

4.3.15 Tilt During Operation. Operate the heater. After the heater has stabilized tilt the heater 5 degrees and operate for a minimum of 15 minutes. Failure of the heater to continue normal safe operation shall constitute a failure. Perform this test on all four sides.

4.3.16 Fuel Lines And Fittings. During durability testing per 4.4.3, visually inspect fuel lines every 100 hours and at the end of the test. Any signs of heat damage or degradation shall constitute a test failure. Disconnect gravity feed fuel supply line from the fuel control with a full inverted fuel can attached to the other end; any leakage of fuel from the fuel line shall constitute a failure. Determine that the gravity feed fuel supply line mates with the standard gravity feed adapter during severe cold weather manipulation per 4.6.4 and the fuel source is the standard five gallon fuel can during durability testing per 4.4.3. Inability of the fuel line to mate with the standard gravity feed adapter and the heater to operate with the standard 5-gallon fuel can as a fuel source shall constitute a failure. Inability to connect the short fuel line from the fuel control to the burner with cold weather gloves shall constitute a failure. Inability of any fuel lines or fittings to provide positive connections with no fuel leakage during any environmental condition specified herein shall constitute a failure.

4.3.17 Gaskets and Seals. Visually inspect gaskets and seals during operation testing per 4.3 every 100 hours and at the end of testing. Any signs of degradation or lose of performance shall constitute a test failure.

4.3.18 Accessories. Inspect the Type I heater for the exhaust pipe and cap, (plastic) gravity feed adapter kit, fuel feed hose, Y- adapter, burner cleaning device, overflow hose, fuel control, technical manual, fuel can stand, fuel spill containment mats for heater and fuel cans, and heater stand. Inspect fuel can stand for ability to support a full 5-gallon military plastic fuel can in an inverted position with the outlet a minimum of 25 inches from the ground. Absence of any of the accessory items required for liquid fuel operation shall constitute a failure unless otherwise specified in the acquisition documents (see 6.2). Verify that the Type II heater contains all accessories required

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:47Z
Check the source to verify that this is the current version before use.

to conduct solid fuel operation. Inability to store all required accessories for solid and liquid fuel operation inside the heater body shall constitute a failure.

4.3.18.1 Fuel Spill Containment Mats. Verify that the fuel mats are the required size and retain the required amount of fuel. Inspect the fuel spill containment mats for fuel resistance, non-flammability, and non-wicking/non-absorbency. Pour 0.25 liters of fuel onto mat and allow to remain on mat for 4 to 5 hours. Verify the fuel is contained on the mat and not absorbed into the mat material. Obtain an 8" by 8" paper towel. Pour a fuel-measuring cup of fuel on mat. Wipe cup with paper towel. Place paper towel into fuel on mat and light. Verify that the fire consumes only the spilled fuel and does not spread throughout the mat material. After the fire extinguishes itself, clean soot from mat. Verify there is no significant damage to the mat and that it can be cleaned and reused. Verify the mats remain usable in a continuous temperature range of -65°F to 500°F and easily store inside the heater body for transport.

4.3.19 Heater Body Surface. Visually inspect all outer surfaces for smooth complete application of high temperature coating or paint with no flaking or chipping. After 1 hour of operation, observe heater paint and heater surface material. Any burning, emission of toxic fumes, bubbling, or any other abnormal condition of heater surface material shall constitute a failure.

4.3.20 Bottom Surface. Inspect bottom of heater for ungrounded and sharp edges on feet or base stand, or on corners, which may cut into tent floor fabric. Inspect heater for a solid bottom, shield, or other means to protect burner and prevent performance degradation in the event the heater were to sink in snow. Inspect the heater bottom for padded feet, base stand or other means to prevent slippage on a packed snow or ice surface. During heater operation, measure bottom surface areas of heater in contact with the floor for temperatures of 150°F or below.

4.3.21 Safety. Observe test records and performance of all test and inspections within this performance specification. Inspect heater system documentation for adequacy of safety information. Presence of any hazards, injury to personnel or damage to equipment or property resulting from testing shall constitute a failure. Evaluate assembly and installation of heater components for potential hazards, presence of any possible misalignment of components which could occur during assembly (i.e. improperly mounted fuel control) shall constitute a failure.

4.3.21.1 Breathable Air. Test for, as a minimum, carbon dioxide, carbon monoxide, and hydrocarbon based combustion gases while the heater is set up in the tent per 4.6.1. The heaters shall operate for a minimum of 8 hours in each tent and all doors shall be closed during testing with no one entering the tent during the test. Any readings above the TLV-TWA as established by the ACGIH shall constitute a failure.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:47Z
Check the source to verify that this is the current version before use.

4.3.21.2 Sharp Edges. Visually inspect the heater. Presence of any non-functional sharp edges shall constitute a failure.

4.3.21.3 Noise. Operate the heater at the high fire rate. Measure sound levels at a 3 foot distance around the outside of the heater on four sides and the top. Any readings in excess of 60 dB shall constitute a failure.

4.4 Support Or Ownership Requirements.

4.4.1 Weight. Weigh the heater without accessories. Any weight readings exceeding the requirements of 3.4.1 shall constitute a failure.

4.4.2 Volume. Measure the outside envelope dimensions of the heater. Any measurements greater than the requirements listed in 3.4.2 shall constitute a failure.

4.4.3 MTBEFF/Maintenance Ratio. Four heaters shall each be placed on a reliability test for a minimum of 461 hours each for a total of 1844 hours collective. Testing shall be conducted at 30° F or colder and the heaters shall be at a setting to maintain a minimum of 50°F inside the tent or a minimum of 60,000 BTU/Hr. There shall be no more than one chargeable essential function failure (cumulative). Fuel type used for test shall be divided equally among DF-2 & JP-8. Perform burner smoke spot, during the start and each 100 hour interval.(10 hours) and once during the last start cycle at the conclusion of this test for each unit operated. A maintenance ratio greater than .0016 maintenance man-hour per operating hour for any maintenance other than PMCS shall constitute a test failure.

4.4.4 Preventive Maintenance Checks And Services (PMCS). Configure the heater for 4.6.1 tent operation. Perform a walk around inspection of the heater and tent, verify a secure fuel control connection, the gravity fuel supply for proper connection, fuel leaks, and general operating condition. A thorough examination shall not exceed 10 minutes.

4.4.5 Transportability. Assess the ability to be carried by the required vehicles by inspection of the maximum dimensions of the heater and accessories with vehicle cargo storage area dimensions. Inability to transport the heaters and accessories with any of the vehicles listed in 3.9 shall constitute a failure.

4.4.6 Loose Cargo. The heater shall be subject to loose cargo testing IAW the requirements and conditions set forth in MIL-STD-810, Method 514.4, Category 3, Procedure III.

(1) Visually check all contents and functionally check the heater.

(2) Place the heater on a tester using fences and a plywood bed configured IAW MIL-STD-810. The package tester speed shall be 300 ±2 RPM. Total test time of 45 minutes shall be divided into the four major loading configurations by stopping the test and rotating the heater 90 degrees and continuing the test as needed.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:47Z
Check the source to verify that this is the current version before use.

(3) Upon completion of the 45 minutes of testing, perform a visual and a functional check of the heater and components.

Any component damage which prevents the heater from operating after loose cargo testing or any damage on the heater or accessories which may lead to unsafe operation shall constitute a test failure.

4.4.7 Drop. The heater shall be subject to drop testing as follows:

(1) Visually check all contents and functionally check the heater.

(2) Suspend the heater by a drop hook such that the desired edge, corner or face is 24 inches from the impact surface. The drop hook shall be triggered allowing the heater to free fall to the drop surface.

(3) The drop surface shall be a packed dirt surface.

(4) A total of six drops to the following orientations: each bottom corner, the bottom, fuel inlet side bottom edge.

(5) Upon completion of the drop testing, perform a visual and operational check.

Any component damage which prevents the heater from operating after drop testing or any damage on the heater or accessories which may lead to unsafe operation shall constitute a test failure.

4.4.8 Fasteners. Verify fasteners during all performance & reliability testing. Any non-captive fasteners, which require removal for normal operation, shall constitute a test failure.

4.4.9 Labels/Tags. Any signs of labels wearing out or falling off from normal usage during operation testing of 4.3 shall constitute a test failure. Omission of any of the required labels shall constitute a failure.

4.4.10 Set up. Configure the Type I or II heater in the MGPTS. Set up shall be conducted by no more than two people. Unpack and install fuel lines, gravity feed adapter, exhaust pipe and guy lines and tripod with fuel can. Average set up times greater than 20 minutes for each heater shall constitute a failure. Repack each heater for storage. Disassembly times greater than 15 minutes for each heater shall constitute a failure.

4.5 Environmental Requirements.

4.5.1 Storage. Subject one heater to storage testing. Bring chamber air temperature up to 155° F (± 3) and 75% relative humidity (± 5), once these conditions are attained, hold for a 4-hour storage period. Remove the heater and perform functionally check. Failure of the

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:47Z
Check the source to verify that this is the current version before use.

heater to operate due to damage withstood during storage testing shall constitute a test failure.

4.5.2 Basic Climate Operation. Stabilize climatic chamber ambient air temperature at 40°F (±2). Cold soak heater, accessories, and fuel. Set up heater per 4.4.10. Operate the heater using fuels specified in Table II. Adjust heater to obtain low and high output requirements as specified in Table II. Measure heater performance as outlined in Appendix A. Inability of the Type I & II heaters to operate over the minimum range of 30,000 BTU/hr to 60,000 BTU/hr within acceptable smoke and efficiency readings shall constitute a failure.

4.5.3 Basic Cold Operation. Stabilize climatic chamber ambient air temperature at -25°F (±2). Cold soak heater, accessories, and fuel. Set up heater per 4.4.10. Operate the heater using fuels specified in Table II. Adjust heater to obtain low and high output requirements as specified in Table II. Measure heater performance as outlined in Appendix A. Inability of the Type I & II heaters to operate over the minimum range of 40,000 BTU/hr to 80,000 BTU/hr within acceptable smoke and efficiency readings shall constitute a failure.

4.5.4 Severe Cold Operation. Stabilize climatic chamber ambient air temperature at -60°F (□2). Cold soak heater, accessories, and fuel. Set up heater per 4.4.10. Operate the heater using fuels specified in Table II. Adjust heater to obtain low and high output requirements as specified in Table II. Measure heater performance as outlined in Appendix A. Inability of the Type I & II heaters to operate over the minimum range of 40,000 BTU/hr to 80,000 BTU/hr within acceptable smoke and efficiency readings shall constitute a failure.

4.5.5 Severe Cold Manipulation. Perform a severe cold manipulation and component replacement test. Cold soak the heater and accessories to -60 °F for a minimum of 4 hours. After component temperature stabilization unpack the heater, connect all fuel lines and set up for operation. Repack all components inside the heater body. Perform this test cycle 3 times. Operate heater at -60° F. Any evidence of damage to fuel lines, fittings, components and accessories or any inability to manipulate components while wearing the appropriate cold weather clothing shall constitute a test failure.

4.5.6 High Altitude. Provide a field site that is 4,000 feet Above Sea Level (ASL) minimum or simulate conditions at 4,000 feet ASL for operational checkouts. Operate heater for a minimum of one hour. Perform smoke spot per Appendix A within 15 minutes after starting and again before shut down. Perform indicated efficiency test per Appendix A and measure fuel flow. Heat output less than 85% rated capacity, unacceptable smoke readings, heater pulsing, or sputtering, shall constitute a failure.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:47Z
Check the source to verify that this is the current version before use.

4.6 Interface Requirements.

4.6.1 Tent Interface. Configure the Type I or II heater in the MGPTS tent. Observe the heater while operated in this configuration; any signs of tent fabric damage due to heat shall constitute a failure.

4.6.2 Fuel Interface. During tests 4.5.2, 4.5.3, and 4.5.4, verify fuels are as specified in 3.5.2.

4.6.3 Thermo-Electric Fan Interface. A thermo-electric fan will be supplied as Government Furnished Property (GFP) to conduct this test. Place the thermo-electric fan on the heater designated location during operation. Failure of the TEF to fit evenly on the heater designated surface such that heated air is directed downward shall constitute a failure. In an ambient temperature between 60° F and 80° F, operate the heater at 60,000 BTU/hr output. Place the TEF on the designated location. After 30 minutes of operation, with the fan still operating on the heater, measure the module temperature using a handheld digital thermometer capable of reading K-type thermocouples from the miniature panel jack mounted on the TEF. Failure to maintain a temperature between 500° F to 600° F shall constitute a failure.

4.6.4 Field Serviceability. Stabilize the heater in accordance with 4.5.2 basic climate, having the heater in an operational configuration. Record the time required to gain access to the burner assembly for cleaning. Inability to gain access within 15 minutes shall constitute a test failure. Time the removal and replacement of the fuel control filter. Inability of the operator to remove and replace the fuel filter using only common hand tools in less than 15 minutes shall constitute a failure. After each component removal and replacement the heater shall be returned to the operational configuration. Repack/stow all components to the transportation configuration. Perform this test cycle 3 times. After completion perform a functional check of the heater.

5. PACKAGING

5.1 Packaging. For acquisition purposes, the packaging requirements shall be as specified in the contract or purchase order (see 6.2). When actual packaging of material is to be performed by DOD personnel, these personnel need to contact the responsible packaging activity to ascertain requisite packaging requirements. Packaging requirements are maintained by the Inventory Control Point's packaging activity within the Military Department or Defense Agency, or within the Military Departments System Command. Packaging data retrieval is available from the managing Military Departments or Defense Agency's automated packaging files, CD-ROM products, or by contacting the responsible packaging activity.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:47Z
Check the source to verify that this is the current version before use.

6. NOTES
(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory)

6.1 Intended Use. The Type I & Type II heaters are intended for heating personnel and equipment housed in the MGPTS. The heaters provide radiant heat without the use of electrical power. The heaters can be safely operated on the following fuels: DF-1, DF-2, DF-A, JP-8, wood and coal.

6.2 Acquisition requirements. Acquisition documents should specify the following:

a. Title, number, and date of this specification.
b. Issue of DoDISS to be cited in the solicitation, and if required, the specific issue of individual documents referenced (see 2.2).
c. When a first article is required (see 3.1.).
d. Sampling plan for first article and conformance test (see 4.2 and 4.3).
e. Packaging requirements (see 5.1).
f. Which accessory items are not required (see 3.3.18)

6.3 Subject term (key word) listing.

Tent heating
Diesel, JP-8, Wood, Coal

6.4 Technical Manuals. The requirement for technical manuals should be considered when this specification is applied on a contract. If technical manuals are required, specifications and standards that have been cleared and listed in DoD 5010.12-L, Acquisition Management Systems and Data Requirements Control List (AMSDL) must be listed on a separate Contract Data Requirements List (DD Form 1423), which is included as an exhibit to the contract. The technical manuals should be acquired under separate contract line item in the contract.

6.5 Verification Alternatives. Contracting documents should provide guidance to offerors regarding the submission of alternatives to specified verification methods (see 4.3.3).

6.6 First Article. When requiring a first article, contracting documents should provide specific guidance to offerors. This guidance should cover whether the first article is a first article sample, a first production item, and the number of test items. These documents should also include specific instructions regarding arrangements for examinations, approval of first article results, and disposition of first articles. Pre-solicitation documents should provide Government waiver rights for first article inspection to bidders offering a previously acquired or tested product. Bidders offering such products who wish to rely on previous testing must furnish evidence with the bid that prior government approval is appropriate for the pending contract.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:47Z
Check the source to verify that this is the current version before use.

6.7 Recycled, Recovered Or Environmentally Preferable Materials. Recycled, recovered or environmentally preferable materials should be used to the maximum extent possible, provided the materials meet or exceed the operational, environmental and maintenance requirements specified herein and promote economically advantageous life cycle costs.

6.8 Part or Identifying Number (PIN). To identify items which are subject to assignment of National Stock Numbers in the Federal Supply System.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:47Z
Check the source to verify that this is the current version before use.

APPENDIX A
Performance Test Procedures

A.1 SCOPE

A.1.1 Scope. This appendix details the performance testing procedures for measuring indicated combustion efficiency, heat output, and burner smoke spot; and is a mandatory part of this specification.

A.2 PROCEDURE

A.2.1 Heater Test Set Up. For all performance testing, the following minimum conditions apply:

a. The heater shall be set up in the normal operating configuration with the correct length of exhaust pipe and on a level surface inside the proper tent.

b. A sampling hole (approximately 1/4" dia) shall be drilled in the exhaust pipe below the point where the exhaust pipe exits the tent roof. The draft shall be natural with out the use of any mechanical draft inducer.

c. Connect a 100ml buret in-line with the fuel supply line to measure fuel flow. An Alltech Associates, Inc. 100cc flowmeter stock # 4045 or equal is sufficient for this test.

A.2.2 Combustion Efficiency Test. The heaters shall be operated for a minimum of 15 minutes at the required setting before taking readings. The following readings shall be taken consecutively within five minutes:

a. Measure flue gas temperature at the sampling hole, a thermometer capable of measuring up to 1300 F shall be used.

b. Measure air temperature immediately around the combustion air intake area of the heater.

c. Measure the CO2 % from the sampling hole using a Bacharach CO2 indicator, Part No. 11-7032.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:47Z
Check the source to verify that this is the current version before use.

Use the following formula for determining the combustion efficiency:

$$E = 1 - \frac{3171 + 2.69\ T_s + \frac{216.2 + .77\ (T_s - T_I) - 5.38\ T_i}{CO2}}{HHV}.$$

E = Combustion efficiency (%/100)
TS = Stack temperature (Degrees C)
TI = Combustion air inlet temperature (Degrees C)
CO2 = Carbon dioxide (%)
HHV = High heat value (joules/gram) (from fuel certification)

A.2.3 Heat Output.

Heat output (BTU/Hr) = F * P * (HHV / 1055) * E * 60

F = Fuel flow rate (ml/min)
P = Fuel density (gm/ml) - (DF-2 = .852 gm/ml) or (JP-8 = .797 gm/ml)
HHV = High heat value (DF-2 = 45166 joule/gram) or (JP-8 = 46163 joule/gram)
E = Combustion efficiency (from A.2.2)

A.2.4 Smoke spot test. At the sampling hole, measure the smoke spot using a Bacharach Fyrite test kit, P/N 10-5000, smoke tester and compare to the Bacharach smoke spot scale. The heater shall be operating for a minimum of 15 minutes before taking the smoke sample.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:47Z
Check the source to verify that this is the current version before use.

APPENDIX B
Figures

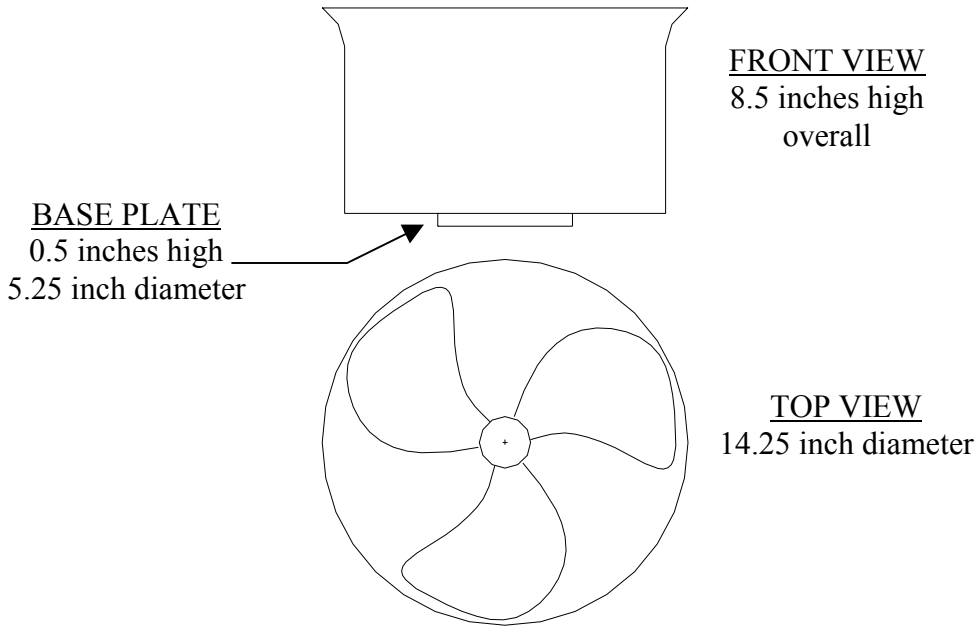


FIGURE 1. Thermo-Electric Fan (TEF)

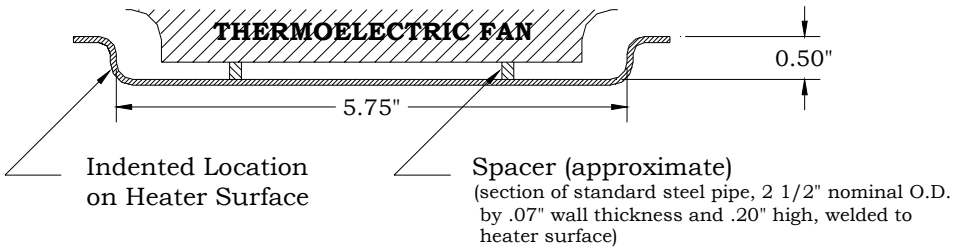


FIGURE 2. TEF interface location and typical spacer

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:47Z
Check the source to verify that this is the current version before use.

Custodians:

Army - GL
Navy - YD
Air Force - 99

Preparing activity:

Army - GL

Review activities

Army - MD1, QM1
Navy - MC
Air Force - 84
DLA-IS

(Project 4520-0436)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:47Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.

2. The submitter of this form must complete blocks 4, 5, 6, and 7, and send to preparing activity.

3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER MIL-PRF-32111	2. DOCUMENT DATE (YYYYMMDD) 20021008

3. DOCUMENT TITLE SPACE, HEATER LARGE-RADIANT, NON-POWERED, LIQUID & SOLID FUEL

4. NATURE OF CHANGE *(Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)*

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME *(Last, First, Middle Initial)*	b. ORGANIZATION	
c. ADDRESS *(Include Zip Code)*	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON *(if applicable)*	**7. DATE SUBMITTED** (YYYYMMDD)

8. PREPARING ACTIVITY

a. NAME US ARMY SOLDIER BIOLOGICAL AND CHEMICAL COMMAND	b. TELEPHONE *Include Area Code)* (1) Commercial 508-233-5592 (2) AUTOVON 256-5592
c. ADDRESS *(Include Zip Code)* US ARMY SOLDIER BIOLOGICAL & CHEMICAL COMMAND ATTN: AMSSB-PM-RSS-F(N) KANSAS STREET, NATICK, MA 01760-5000	**IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT:** Defense Standardization Program Office (DLSC-LM) 8725 John J. Kingman road, Suite 2533 Ft. Belvoir, VA 22060-2533 Telephone (703) 767-6888 AUTOVON 427-6888

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:47Z
Check the source to verify that this is the current version before use.