MIL-P-70452D (AR)
10 JANUARY 1992
SUPERSEDING
MIL-P-70452C (AR)
20 JULY 1991

MILITARY SPECIFICATION

PRIMER, ELECTRIC, M125
METAL PARTS FOR

This specification is approved for use by the U.S. Army Armament Munitions and Chemical Command, and is available for use by all Departments and Agencies of the Department of Defense.

1.0 SCOPE

1.1 Scope This specification covers the requirements and quality assurance provisions for the metal parts for the Primer, Electric, M125.

2.0 APPLICABLE DOCUMENTS

2.1 Government documents.

* 2.1.1 Specifications, standards, and handbooks. - Unless otherwise specified, the following specifications, standards, and handbooks of the issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation form a part of this specification to the extent specified herein.

SPECIFICATIONS

MILITARY

AS 1867	Rubber Stock Molding, Uncured, Silica Filled
MIL-A-48078	Ammunition, Standard Quality Assurance Provision, General Specification for

STANDARDS

MILITARY

MIL-STD-105	Sampling Procedures and Tables for Inspection by Attributes

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commander, U.S. Army Armament Research and Development Center, Attn: AMSMC-QA, Picatinny Arsenal, New Jersey 07806-5000 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC-1315

Distribution Statement A: Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:27Z
Check the source to verify that this is the current version before use.

MIL-STD-1169	Packaging, Packing and Marking for Shipment of Inert Ammunition Components
MIL-STD-1235	Single and Multiple Continuous Sampling Procedures and Tables for Inspection by Attributes

OTHER

ASTM E-3	Metals Handbook (Volume 7)

2.1.2 Other Government documents, drawings and publications. - The following Government documents, drawings and publications form a part of this specification to the extent specified herein.

DRAWINGS (See 6.4)

U.S. ARMY ARMAMENT RESEARCH AND DEVELOPMENT CENTER (ARDC)

	8839509	Retainer
	8839514	Closing Disc
	9327341	Liner
	9327342	Plug, Closing
	12525016	Primer, Electric, M125
	12525018	Body
	12525019	Head, Primer
*	12525048	Body Assembly
*	12525049	Adhesive
	12525631	Tip, Primer

(Copies of specifications, standards, drawings and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Order of precedence. - In the event of a conflict between the text of this specification and the reference specifications cited herein, the text of this specification shall take precedence.

3.0 REQUIREMENTS

3.1 Material. - Materials shall be in accordance with applicable drawings and specifications.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:27Z
Check the source to verify that this is the current version before use.

* 3.2 Components and parts. - The components and parts shall comply with all requirements specified on applicable drawings and specifications.

3.3 Hydrostatic test. - The body tubing shall withstand the application of a minimum hydrostatic pressure without rupture or indication of flaws, as evidenced by leaks, and without permanent deformation beyond drawing requirements.

* 3.4 Workmanship. - All parts shall be free of burrs, chips, sharp edges, cracks, unblended radii, surface defects, dirt, grease, rust, corrosion products and other foreign matter. The cleaning method shall not be injurious to any part nor shall the parts be contaminated by the cleaning agent. All required markings shall be legible. Special care shall be exercised when handling, preparing, and molding the body (P/N 12525018) with rubber to ensure that the body surface remains free of solvents, mold release, or other foreign material.

3.5 First article inspection. - This specification makes provisions for first article inspection. Requirements for submission of first article samples by the contractor shall be as specified in the contract.

* 3.6 Rubber peel resistance. - Adhesion of rubber to the body shall be verified by stripping rubber from the body and examining the condition of the body surface. There shall be evidence of cohesive failure of the rubber. Evidence of adhesive failure shall be cause for rejection of the batch represented by the sample.

* 3.7 Adhesion of rubber to body. - Adhesion of rubber to the body shall be verified non-destructively throughout the production process. Alignment of holes in rubber coating with holes in body shall be monitored. Evidence of misalignment (movement) shall be cause for rejection of the lot.

4.0 QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection and standard quality assurance provisions. - Unless otherwise specified herein or in the contract, the provisions of MIL-A-48078 shall apply.

4.2 Classification of inspections. - The inspection requirements specified herein are classified as follows:

a. First article inspection

b. Quality conformance inspection

4.3 First article inspection

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:27Z
Check the source to verify that this is the current version before use.

4.3.1 Submission. - The contractor shall submit a first article sample for evaluation in accordance with 4.3.2. The sample shall consist of parts which have been produced by the contractor or furnished by a supplier which have been manufactured using the same production processes, procedures, and equipment which will be used in fulfilling the contract. All parts and materials shall be obtained from the same source of supply as will be used in regular production. A first article sample, or portion thereof, as directed by the contracting officer, shall also be submitted whenever there is a lapse in production for a period in excess of 90 days, or whenever a change occurs in manufacturing processes, material used, drawing, specification or source of supply as to significantly affect product uniformity as determined by the Government. The first article sample shall consist of ten each of every component. Whenever castings, mold or die cast parts are involved, five parts minimum from each cavity are required when there are two or more cavities.

4.3.2 Inspections to be performed. - See MIL-A-48078 and Table I specified herein.

4.3.3 Rejection. - See MIL-A-48078.

4.4 Quality conformance inspection.

4.4.1 Inspection lot formation. - Inspection lots shall comply with lot provisions of MIL-A-48078.

4.4.2 Examination. - Unless otherwise specified in the classification of defects and tests tables, sampling plans for major and minor defects shall be in accordance with MIL-STD-105, Inspection Level II. Continuous sampling plans in accordance with MIL-STD-1235 may be used if approved by the Government.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:27Z
Check the source to verify that this is the current version before use.

TABLE I. - FIRST ARTICLE INSPECTION.

CLASSIFICATION OF DEFECTS AND TESTS

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
	Retainer				See Below
					NEXT HIGHER ASSEMBLY
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
	Retainer (dwg. 8839509) Examination for Defects	10		3.2	4.4.2.1
	Head Primer (dwg. 12525019) Examination for Defects	10		3.2	4.4.2.2
	Body (dwg. 12525018) Examination for Defects	10		3.2	4.4.2.3
	Tip, Primer (dwg. 12525631) Examination for Defects	10		3.2	4.4.2.4
	Disc, Closing (dwg. 8839514) Examination for Defects	10		3.2	4.4.2.5
	Liner (dwg. 9327341) Examination for Defects	10		3.2	4.4.2.6
	Plug, Closing (dwg. 9327342) Examination for Defects	10		3.2	4.4.2.7
*	Body Assembly (dwg. 12525048) Examination for Defects 1/	50 2/		3.2	4.4.2.9
*	Peel Resistance 3/	10		3.6	4.5.4

NOTES:
* 1/ Excluding CD104 - rubber peel resistance.
* 2/ Distribute samples equally amongst mold cavities.
* 3/ CD 104 only - rubber peel resistance.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:27Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION.

CLASSIFICATION OF DEFECTS AND TESTS

PARAGRAPH 4.4.2.1	TITLE Retainer		SHEET 1 OF 1		DRAWING NUMBER 8839509
					NEXT HIGHER ASSEMBLY 12525017
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Pitch diameter, minimum		0.40%	3.2	Gage
102	Major diameter, minimum		0.40%	3.2	Gage
103	Diameter of hole, minimum		0.40%	3.2	Gage
Minor					
201	Thickness, minimum		0.65%	3.2	Gage
202	Slot missing		0.65%	3.2	Visual
203	Surface finish incorrect		0.65%	3.2	Visual
204	Pitch diameter, maximum		0.65%	3.2	Gage
205	Evidence of poor workmanship		0.65%	3.4	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:27Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION.

CLASSIFICATION OF DEFECTS AND TESTS

PARAGRAPH 4.4.2.2	TITLE Head, Primer		SHEET 1 OF 5		DRAWING NUMBER 12525019
					NEXT HIGHER ASSEMBLY 12525017
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical					
1	Minor diameter of large internal threads, maximum		100%	3.2	Gage
2	Pitch diameter of large internal threads, maximum		100%	3.2	Gage
Major					
101	Pitch diameter of external threads, minimum		0.40%	3.2	Gage
102	True position of pitch diameter of large internal threads with pitch diameter of external threads		0.40%	3.2	Gage
103	Pitch diameter of small internal threads, maximum		0.40%	3.2	Gage
104	Minor diameter of small internal threads, maximum		0.40%	3.2	Gage
105	Major diameter of external threads, minimum		0.40%	3.2	Gage

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:27Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION.

CLASSIFICATION OF DEFECTS AND TESTS

PARAGRAPH 4.4.2.2	TITLE Head Primer		SHEET 2 OF 5		DRAWING NUMBER 12525019
					NEXT HIGHER ASSEMBLY 12525017
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
106	True position of pitch diameter of small internal threads with diameter of large unthreaded cavity		0.40%	3.2	Gage
107	Flange diameter		0.40%	3.2	Gage
108	True position of flange diameter with pitch diameter of external threads		0.40%	3.2	Gage
109	Flange thickness		0.40%	3.2	Gage
110	Diameter of large unthreaded cavity		0.40%	3.2	Gage
111	Diameter of small unthreaded cavity		0.40%	3.2	Gage
112	True position of diameter of small unthreaded cavity with diameter of large unthreaded cavity		0.40%	3.2	Gage
113	Protective coating missing		0.40%	3.2	Gage
114	Protective coating inadequate	4.5.2		3.2	4.5.2

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:27Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION.

CLASSIFICATION OF DEFECTS AND TESTS

PARAGRAPH 4.4.2.2	TITLE Head Primer		SHEET 3 OF 5		DRAWING NUMBER 12525019
					NEXT HIGHER ASSEMBLY 12525017
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
115 Minor	Perpendicularity of forward face of flange to external thread pitch diameter		0.40%	3.2	Gage
201	Pitch diameter of external threads, maximum		0.65%	3.2	Gage
202	Pitch diameter of large internal threads, minimum		0.65%	3.2	Gage
203	Pitch diameter of small internal threads, minimum		0.65%	3.2	Gage
204	Length, total		0.65%	3.2	Gage
205	Length from flange to beginning of external threads		0.65%	3.2	Gage
206	Length from flange to end of external threads		0.65%	3.2	Gage
207	Depth of small unthreaded cavity		0.65%	3.2	Gage
208	Diameter, forward end of large threaded cavity		0.65%	3.2	Gage

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:27Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION.

CLASSIFICATION OF DEFECTS AND TESTS

PARAGRAPH 4.4.2.2	TITLE Head Primer		SHEET 4 OF 5		DRAWING NUMBER 12525019
					NEXT HIGHER ASSEMBLY 12525017
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
209	Outside diameter, forward		0.65%	3.2	Gage
210	Depth from aft end of large threaded cavity to front face		0.65%	3.2	Gage
211	Minimum effective length of large internal thread		0.65%	3.2	Gage
212	Depth from front face to rear of small threaded cavity		0.65%	3.2	Gage
213	Countersink angle at the rear of small threaded cavity		0.65%	3.2	Visual
214	True position of largest internal diameter to large internal threads		0.65%	3.2	Gage
215	Depth from front face to forward end of large internal threads		0.65%	3.2	Gage
216	Minimum effective length of small internal threads		0.65%	3.2	Gage
217	Depth of wrench holes		0.65%	3.2	Gage

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:27Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION.

CLASSIFICATION OF DEFECTS AND TESTS

PARAGRAPH 4.4.2.2	TITLE Head Primer		SHEET 5 OF 5		DRAWING NUMBER 12525019
					NEXT HIGHER ASSEMBLY 12525017
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
218	Diameter of wrench holes		0.65%	3.2	Gage
219	True position of wrench holes		0.65%	3.2	Gage
220	Chamfers missing or incorrect		0.65%	3.2	Visual
221	Radii missing or incorrect		0.65%	3.2	Visual
222	Surface finish incorrect		0.65%	3.2	Visual
223	Evidence of poor workmanship		0.65%	3.2	Visual
224	True position of minor diameter of large internal thread with large unthreaded cavity		0.65%	3.2	Gage

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:27Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION.

CLASSIFICATION OF DEFECTS AND TESTS

PARAGRAPH 4.4.2.3	TITLE Body		SHEET 1 OF 3		DRAWING NUMBER 12525018
					NEXT HIGHER ASSEMBLY 12525016
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical					
1	Flash hole(s) missing		100%	3.2	Gage
2	Hydrostatic (Prior to machining)		100%	3.3	4.5.1
3	Metal parts defects 1/		100%	3.2	Visual 2/
4	Major diameter of external thread, minimum		100%	3.2	Gage
5	Pitch diameter of external thread, minimum		100%	3.2	Gage
6	Martensite microstructure			3.2	4.5.3
Major					
101	Plug gage fails to pass through body		0.40%	3.2	Gage
102	Location of first row of holes		0.40%	3.2	Gage

NOTES:
1/ Cracks, splits, tears, metal discontinuities, etc.
2/ Use 4x magnification aid.
3/ Two (2) samples shall be pulled per inspection lot as defined in MIL-STD-105D

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:27Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION.

CLASSIFICATION OF DEFECTS AND TESTS

PARAGRAPH 4.4.2.3	TITLE Body		SHEET 2 OF 3		DRAWING NUMBER 12525018 / NEXT HIGHER ASSEMBLY 12525016
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
103	Location of second row of holes		0.40%	3.2	Gage
104	Wall thickness		0.40%	3.2	Gage
105	Diameter of flash holes		0.40%	3.2	Gage
106	Pitch diameter of internal thread, maximum		0.40%	3.2	Gage
107	Minor diameter of internal thread, maximum		0.40%	3.2	Gage
108	True position of flash holes		0.40%	3.2	Gage
109	Protective finish missing		0.40%	3.2	Visual
* 110	Protective finish inadequate	4.5.2		3.2	4.5.7
111	Outside diameter		0.40%	3.2	Gage
112	Flash hole variations, maximum 4/		0.40%	3.2	Gage
113	Total length minimum		100%	3.2	Gage

NOTES:
4/ Check two holes, minimum, in each row.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:27Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION.

CLASSIFICATION OF DEFECTS AND TESTS

PARAGRAPH 4.4.2.3	TITLE Body		SHEET 3 OF 3		DRAWING NUMBER 12525018
					NEXT HIGHER ASSEMBLY 12525016
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Minor					
201	Total length maximum		0.65%	3.2	Gage
202	Length of internal thread, minimum		0.65%	3.2	Gage
203	Length to end of external threads		0.65%	3.2	Gage
204	Length of thread pilot		0.65%	3.2	Gage
205	Diameter of thread pilot		0.65%	3.4	Gage
206	Pitch diameter of external threads, maximum		0.65%	3.2	Gage
207	Pitch diameter of internal threads, minimum		0.65%	3.2	Gage
208	Evidence of poor workmanship		0.65%	3.2	Visual
209	True position of external thread		0.65%	3.2	Gage

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:27Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION.

CLASSIFICATION OF DEFECTS AND TESTS

PARAGRAPH 4.4.2.4	TITLE Tip, Primer		SHEET 1 OF 2		DRAWING NUMBER 12525631
					NEXT HIGHER ASSEMBLY 12525016
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Major diameter of thread, minimum		0.40%	3.2	Gage
102	Pitch diameter of thread, minimum		0.40%	3.2	Gage
Minor					
201	Major diameter of thread, maximum		0.65%	3.2	Gage
202	Pitch diameter of thread, maximum		0.65%	3.2	Gage
203	Diameter of blade		0.65%	3.2	Gage
204	Width of blade		0.65%	3.2	Gage
205	Radius on blade		0.65%	3.2	Visual
206	Length of blade		0.65%	3.2	Gage

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:27Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION.

CLASSIFICATION OF DEFECTS AND TESTS

PARAGRAPH 4.4.2.4	TITLE Tip, Primer		SHEET 2 OF 2		DRAWING NUMBER 12525631
					NEXT HIGHER ASSEMBLY 12525016
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
207	Length from aft end of blade to aft end of threads		0.65%	3.2	Gage
208	Protective finish missing		0.65%	3.2	Visual
209	Protective finish inadequate	4.5.2		3.2	4.5.2
210	Evidence of poor workmanship		0.65%	3.4	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:27Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION.

CLASSIFICATION OF DEFECTS AND TESTS

PARAGRAPH 4.4.2.5	TITLE Disc, Closing		SHEET 1 OF 1		DRAWING NUMBER 8839514
					NEXT HIGHER ASSEMBLY 12525017
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Diameter		0.40%	3.2	Gage
102	Thickness		0.40%	3.2	Gage
Minor					
201	Evidence of poor workmanship		0.65%	3.4	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:27Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION.

CLASSIFICATION OF DEFECTS AND TESTS

PARAGRAPH 4.4.2.6	TITLE Liner		SHEET 1 OF 1		DRAWING NUMBER 9327341
					NEXT HIGHER ASSEMBLY 12525016
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major	None defined				
Minor					
201	Length		0.65%	3.2	Gage
202	Width		0.65%	3.2	Gage
203	Thickness		0.65%	3.2	Gage
204	Evidence of poor workmanship		0.65%	3.2	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:27Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS AND TESTS

PARAGRAPH 4.4.2.7	TITLE Plug, Closing		SHEET 1 OF 2		DRAWING NUMBER 9327342
					NEXT HIGHER ASSEMBLY 9327346
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Pitch diameter, minimum		0.40%	3.2	Gage
102	Hole missing or obstructed		0.40%	3.2	Gage
103	Major diameter, minimum		0.40%	3.2	Gage
104	Thread length of engagement		0.40%	3.2	Gage
105	True position of large outside diameter		0.40%	3.2	Gage
Minor					
201	Pitch diameter, maximum		0.65%	3.2	Gage
202	Diameter of hole, minimum		0.65%	3.2	Gage
203	Diameter of counterbore		0.65%	3.2	Gage
204	Total length, maximum		0.65%	3.2	Gage
205	Length to shoulder, minimum		0.65%	3.2	Gage

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:27Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION.

CLASSIFICATION OF DEFECTS AND TESTS

PARAGRAPH 4.4.2.7	TITLE Plug, Closing		SHEET 2 OF 2		DRAWING NUMBER 9327342
					NEXT HIGHER ASSEMBLY 9327346
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
206	Length of thread relief		0.65%	3.2	Gage
207	Evidence of poor workmanship		0.65%	3.4	Visual
208	Depth of slot		0.65%	3.2	Gage
209	Width of slot		0.65%	3.2	Gage

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:27Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION.

CLASSIFICATION OF DEFECTS AND TESTS

PARAGRAPH * 4.4.2.8	TITLE Adhesive		SHEET 1 OF 1		DRAWING NUMBER 12525049
					NEXT HIGHER ASSEMBLY 12525048
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Material correct	1/		3.1	Certification of Analysis

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:27Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION.

CLASSIFICATION OF DEFECTS AND TESTS

PARAGRAPH * 4.4.2.9	TITLE Body Assembly		SHEET 1 OF 2		DRAWING NUMBER 12525048
					NEXT HIGHER ASSEMBLY 12525016
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Rubber thickness	3/	0.40%	3.2	4.5.6. / Gage
102	Length from Body Assembly OD threaded to rubber		0.40%	3.2	Gage
103	Length from Body Assembly ID threaded to rubber		0.40%	3.2	Gage
104	Rubber peel resistance	1/		3.6	4.5.4
105	Evidence of rubber in or over metal body flash hole location or inside body assembly		0.40%	3.2	Visual
106	Adhesion of rubber to body		100%	3.7	4.5.5
107	Rubber material correct	2/		3.2	Certification of Analysis

NOTES:

1/ Minimum of four samples, equally distributed per shift.
2/ Per batch. Certified per AS 1867.
3/ 360° each end.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:27Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION.

CLASSIFICATION OF DEFECTS AND TESTS


PARAGRAPH * 4.4.2.9	TITLE Body Assembly		SHEET 2 OF 2		DRAWING NUMBER 12525048
					NEXT HIGHER ASSEMBLY 12525016
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
108	Diameter of rubber coated body	4/	0.40%	3.2	4.5.6/Gage
Minor					
201	Evidence of poor workmanship		0.65%	3.2	Visual
Special					
301	Flash hole blocked		100%	3.2	Gage

NOTES:

4/ 360° at one location, approximately center of rubber coating length, between holes.


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:27Z
Check the source to verify that this is the current version before use.

ACCEPT:

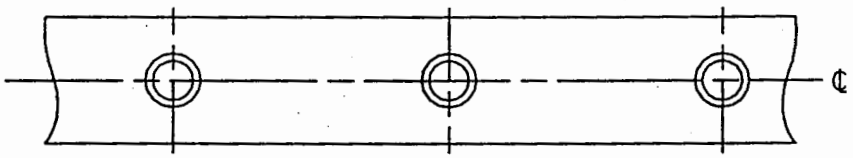


NO. 1: ALIGNMENT OF FLASH HOLES IN RUBBER COATING WITH FLASH HOLES IN METAL BODY.

REJECT:

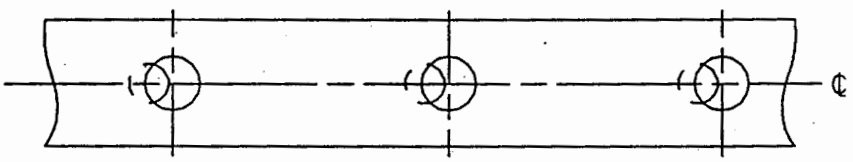

NO. 2: MISALIGNMENT OF FLASH HOLES IN RUBBER COATING OBSCURING THE FLASH HOLES IN METAL BODY, TO ANY DEGREE.

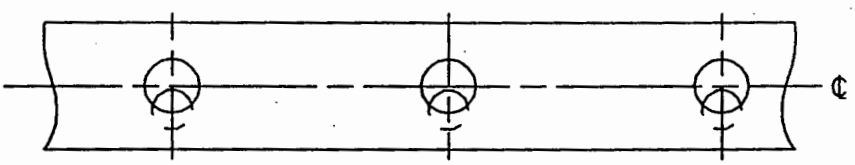

NO. 3: MISALIGNMENT OF FLASH HOLES IN RUBBER COATING OBSCURING THE FLASH HOLES IN METAL BODY, TO ANY DEGREE.

* FIGURE 1. Misalignment criteria, rubber coating to metal body.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:27Z
Check the source to verify that this is the current version before use.

4.4.3 Testing. - Testing is described in the Quality Conformance Inspection tables.

4.4.4 Inspection equipment. - The inspection equipment required to perform the examination and tests prescribed in this specification is identified in the "Paragraph Reference/Inspection Method" column in the tables starting with paragraph 4.4.2.1, and the test method paragraphs (see 4.5). The contractor shall submit for approval, inspection equipment designs in accordance with the terms of the contract. See Section 6 of MIL-A-48078, and Section 6.3 herein.

4.5 Test methods and procedures.

4.5.1 Hydrostatic test. - Prior to machining, the primer tubing shall be tested for not less than five seconds at the minimum hydrostatic pressure as calculated by the following formula:

$$P = \frac{1.8\ St}{D}$$

Where:

P = tests pressure in pounds per square inch (psi)
S = minimum specified annealed material yield strength, psi
t = specified minimum wall thickness in inches
D = specified maximum outside diameter in inches

Failure to meet the specified requirements shall be cause for rejection. Acceptable units shall be marked with an "H".

If the primer tubing procured for the bodies manufactured in accordance with this specification has been previously subjected to the hydrostatic test specified in this specification, a second hydrostatic test will not be required.

4.5.2 Protective coatings. - Procedures for testing, the cleaning of components and the application of protective coatings shall be in accordance with the criteria for testing as specified on the applicable component drawings and in the specification referenced thereon. One component per lot of components having protective finish applied shall be tested.

4.5.3 Heat treatment microstructure. - The heat microstructure shall be tempered martensite as determined by preparing the samples in accordance with Sections 27 and 29 of specification ASTM E-3. The structure shall be determined at magnifications of 500 x or higher. Typical structures are depicted on pages 38 and 39 of the Volume 7 of the Eighth edition of Metals Handbook.

* 4.5.4 Peel resistance. - After molding rubber to the body, a strip of rubber shall be stripped from the body assembly. Stripping shall be

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:27Z
Check the source to verify that this is the current version before use.

accomplished by making two (2) longitudinal slits 3.0 inches in length in the rubber surface approximately 0.3 inches wide, between flash holes. These slits shall begin at the end of the rubber at the externally threaded end. The tab of rubber, formed by the longitudinal slits, shall be grasped with the end of a needle-nose plier. The tab shall be rolled longitudinally along the body assembly so as to wrap the needle-nose pliers. The condition of the rubber and metal shall be examined. Failure to meet the specified requirement shall be cause for rejection in accordance with paragraph 3.6.

* 4.5.5 Adhesion of rubber to body (alignment of holes). - Adhesion of rubber to the body shall be verified by monitoring hole alignment (relative positions of molded holes in rubber and punched holes in metal body, see Figure 1). As a minimum, the coated body shall be examined during and after the final rubber coating finishing operation (surface grind). Presence of misalignment or material movement shall be evidence of inadequate rubber adhesion requiring rejection in accordance with paragraph 3.7.

* 4.5.5.1 Alternative non-destructive methods acceptable to the Government must be utilized if surface grinding operations are not used. These method(s) must demonstrate detection of any unbonded areas throughout the entire length of the Rubber Coated Primer Body. Presence of inadequate rubber adhesion as evidenced by the detection of unbonded areas shall be cause for rejection of the lot.

* 4.5.6 Rubber thickness. - Rubber wall thickness shall be determined non-destructively by measuring the wall thickness at each end of the body assembly. In addition the functional thickness of the rubber shall be determined by measuring the body diameter at the approximate center of the rubber coating length.

* 4.5.7 Projectile finish, body. - Adequacy of protective finish shall be verified by corrosion testing. Corrosion testing shall be conducted in accordance with ASTM B117 for 48 hours. Specimens shall show no evidence of corrosion products of the base metal at the end of the test period. The appearance of base metal corrosion products visible to the unaided eye at normal reading distance shall be cause for rejection, except that base metal corrosion products at the edges of the specimens shall not constitute failure.

* 4.6 Environmental conditions. - Precautions shall be taken to protect the metal body, after final cleaning and prior to rubber molding, to prevent contact with grease, airborne contaminants/vapors (i.e. mold releases), and other materials detrimental to adhesion between the metal body surface and rubber coating. Where necessary, intermediate packaging and manufacturing room atmospheres (clean enough to provide atmosphere necessary to meet the requirements of para. 3.4) are recommended to protect pre-molded bodies.

5.0 PACKAGING

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:27Z
Check the source to verify that this is the current version before use.

5.1 Packaging, packing and marking. - The parts shall be packaged, packed and marked in accordance with MIL-STD-1169.

6.0 NOTES

6.1 Intended use. - The components covered by this specification are intended for use in the M125 electric primer. The M125 primer is utilized in the 120 mm Kinetic Energy (KE) cartridges.

6.2 Ordering data. - See MIL-A-48078.

6.3 Submission of inspection equipment designs for approval. - (See MIL-A-48078). - Submit equipment designs as required, to Commander, ARDC, ATTN: DRSMC-QAT-I(D)D, Dover, New Jersey 07801.

6.4 Drawings. - Drawings listed in Section 2 of this specification under the heading U.S. Army Armament Research and Development Center (ARDC) may also include drawings prepared by, and identified as Edgewood Arsenal, Frankford Arsenal, Rock Island Arsenal, Picatinny Arsenal, or U.S. Army Research and Development Command drawings. Technical data originally prepared by these activities is now under the cognizance of ARDC.

Custodian:
Army-AR

Preparing Activity:
Army-(AR)

Project Number:
1315-AD71

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:27Z
Check the source to verify that this is the current version before use.