MILITARY SPECIFICATION

RESISTOR-CAPACITOR NETWORK, FIXED FILM RESISTORS AND CERAMIC CAPACITOR, STYLE RZ120, 16 PIN FLAT PACK

This amendment forms a part of MIL-R-83401/12, dated 9 March 1987, and is approved for use by all Departments and Agencies of the Department of Defense.

PAGE 2

3.3.4, delete and substitute:

"3.3.4 Power rating (70°C). The power rating shall be 0.25 watt for each resistor. Total network power rating shall be 0.3 watt."

PAGE 4

FIGURE 2, delete and substitute:

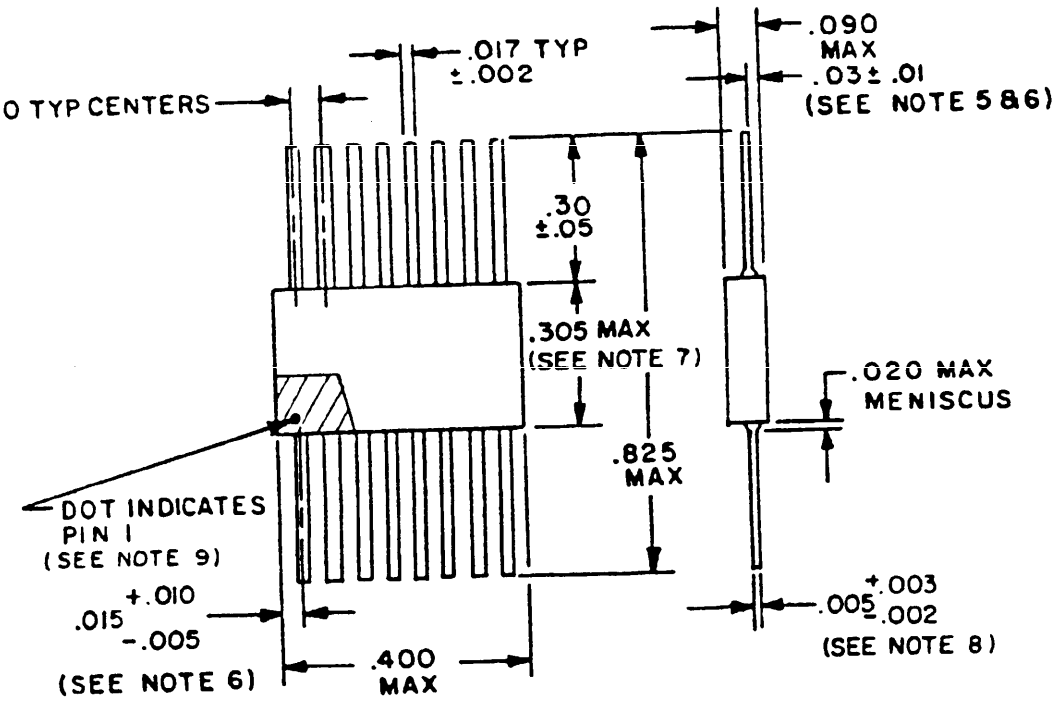


FIGURE 2, add new note 9:

"9. Pin 1 locator shall be a dot, notch, stripe, or numeral 1 adjacent to pin 1, in the shaded area."

FSC 5915

AMSC N/A

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 202610-23T07:57Z
Check the source to verify that this is the current version before use.

PAGE 6

4.1.1b, delete and substitute:

"b. The inspections specified in table II shall be conducted on the number of samples specified. Samples may be of any schematic but shall be of the highest resistance value for which qualification is requested."

CONCLUDING MATERIAL

Custodians:
Army - ER
Navy - EC
Air Force - 85
NASA - NA

Review activities:
Army - AR, MI
Navy - AS, OS
Air Force - 17
DLA - ES

User activities:
Army - AT, AV, ME
Navy - CG, MC
Air Force - 19

Preparing activity:
Air Force - 85

Agent:
DLA - ES

(Project 5915-0336)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:57Z
Check the source to verify that this is the current version before use.