MILITARY SPECIFICATION

MODULES, STANDARD ELECTRONIC

GATE, NAND, DIGITAL, KEY CODE CHH

This amendment forms a part of Military Specification MIL-M-28787/293(EC), dated 7 March 1980, and is approved for use by the Naval Electronic Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

PAGE 1

1.2, second line: Delete "100°C" and substitute "85°C".

PAGES 4 and 5

4.3, delete and substitute the following:

"4.3 Test equipment. Test equipment specified on figures and in tables with a type designator shall be as specified in MIL-STD-1665. Other equipment and components shall be as specified on the figures. All resistors shall be metal film and all capacitors shall be ceramic unless otherwise specified."

PAGES 7, 8, and 9

TABLE II, Class II column heading: Delete "100°" (three places) and substitute "85°" (three places).

PAGE 17

FIGURE 6: Delete and substitute new figure 6 as printed on page 2 of this amendment.

PAGE 29

FIGURE 10: Delete and substitute new figure 10 as printed on page 3 of this amendment.

PAGE 33

FIGURE 11: Delete and substitute new figure 11 as printed on page 4 of this amendment.

PAGE 56

FIGURE 17: Delete and substitute new figure 17 as printed on page 5 of this amendment.

PAGE 69

FIGURE 23: Delete and substitute new figure 23 as printed on page 6 of this amendment.

Agent:
DLA - ES

Preparing activity:
Navy - EC

(Project 5963-N505)

FSC 5963

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T17:26Z
Check the source to verify that this is the current version before use.

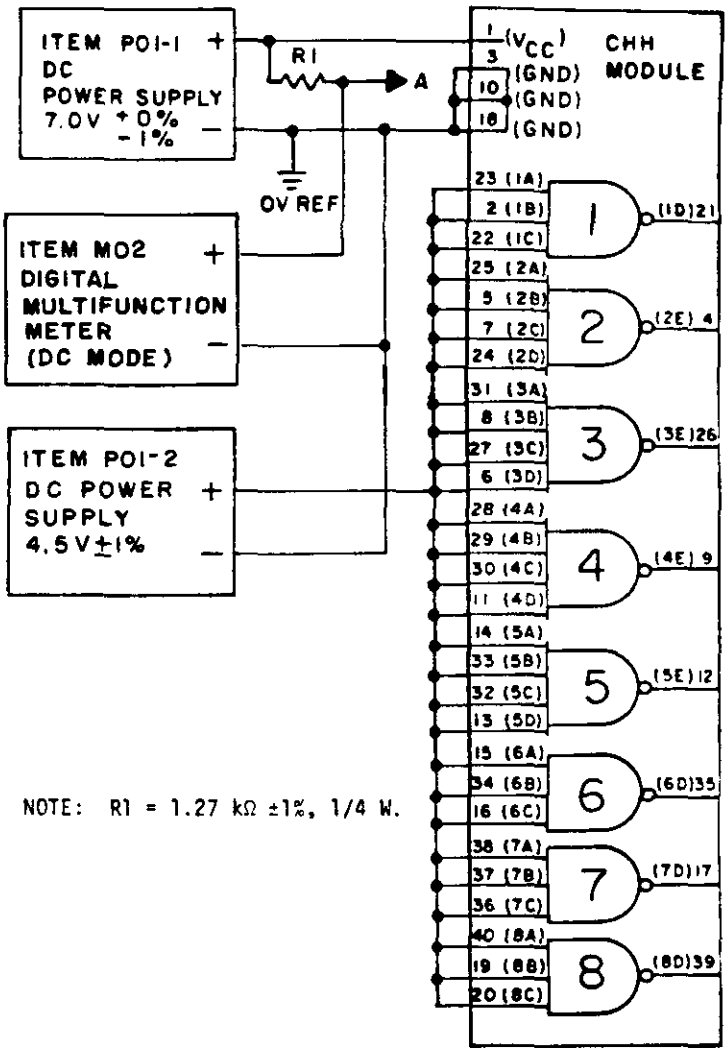


FIGURE 6. V_{OUT} (low-loaded) test circuit for table IV.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T17:26Z
Check the source to verify that this is the current version before use.


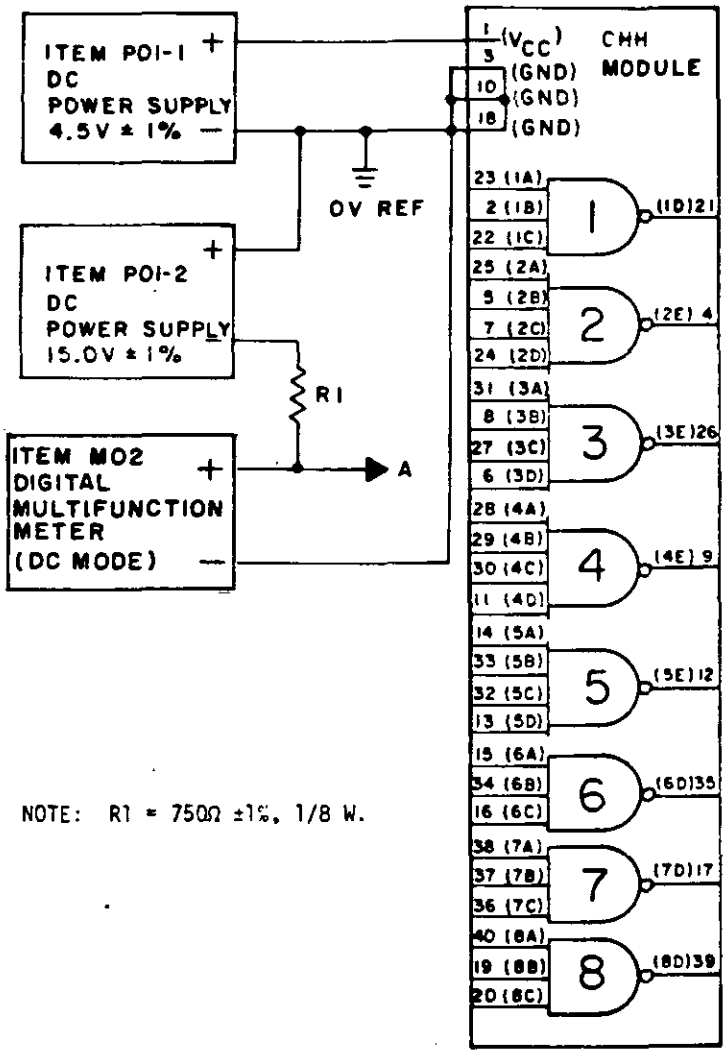


FIGURE 10. Input clamp diode voltage test circuit for table VIII.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T17:26Z
Check the source to verify that this is the current version before use.

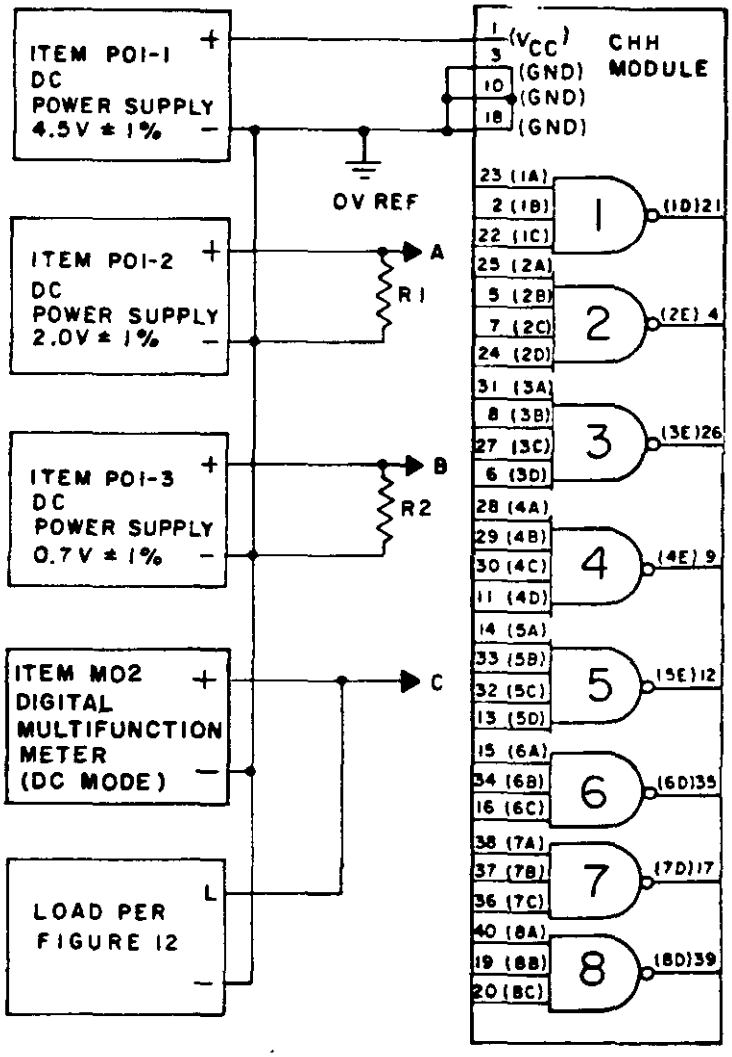

NOTE: R1 = R2 = 51Ω ±5%, 1/2 W.

FIGURE 11. Static output voltage (low-level and high-level) test circuit for tables IX and X.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T17:26Z
Check the source to verify that this is the current version before use.


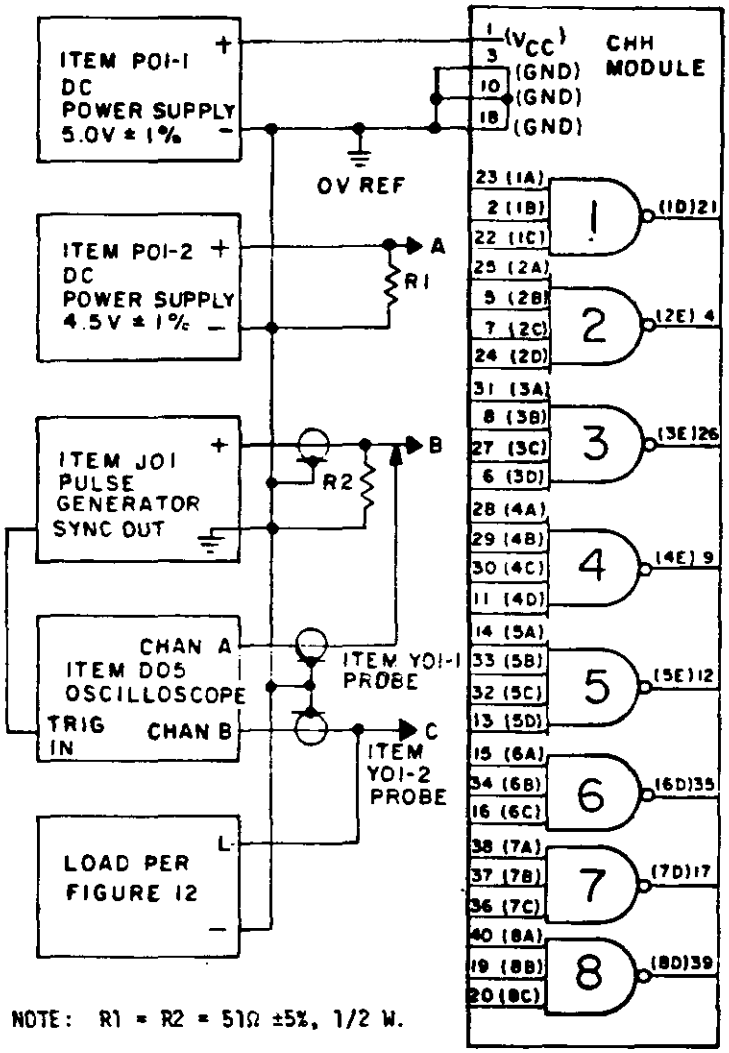


FIGURE 17. Transition time and propagation delay time test circuit for table XV.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T17:26Z
Check the source to verify that this is the current version before use.

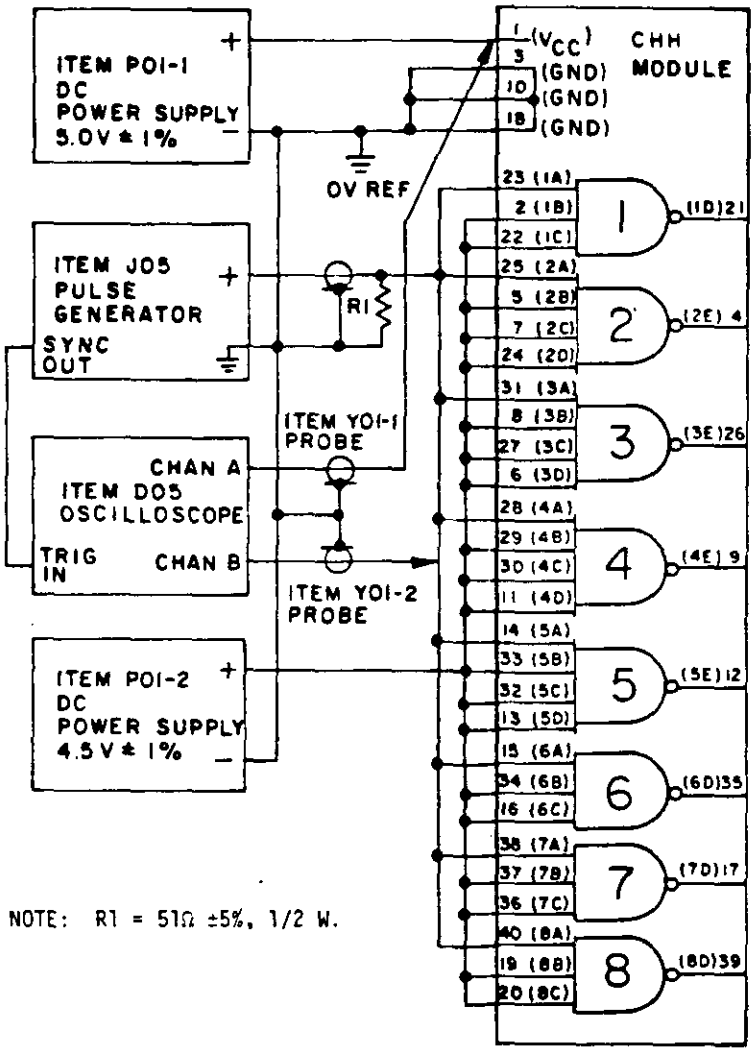

NOTE: R1 = 51Ω ±5%, 1/2 W.

FIGURE 23. Power supply transient amplitude test circuit for table XVIII.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T17:26Z
Check the source to verify that this is the current version before use.