MILITARY SPECIFICATION

MODULES, STANDARD ELECTRONIC
INVERTER, DIGITAL, KEY CODE RHG

This amendment forms a part of MIL-M-28787/298A(EC), dated 16 August 1983, and is approved for use by the Space and Naval Warfare Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

PAGE 6

4.4.2, delete and substitute the following:

" 4.4.2 Order of testing. Test conditions A through W shall be performed in any order with the following exceptions. Test conditions A, B, and C are stress tests and will be performed only at 25°C ±5°C. If test conditions A, B, C, D, or E are part of a sequence of tests, the order of testing shall be as follows: A, B, C, D, E where applicable, followed by the remaining tests in the sequence."

PAGE 55

FIGURE 22: Delete and substitute new figure 22 as printed on page 2 of this amendment.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T17:29Z
Check the source to verify that this is the current version before use.

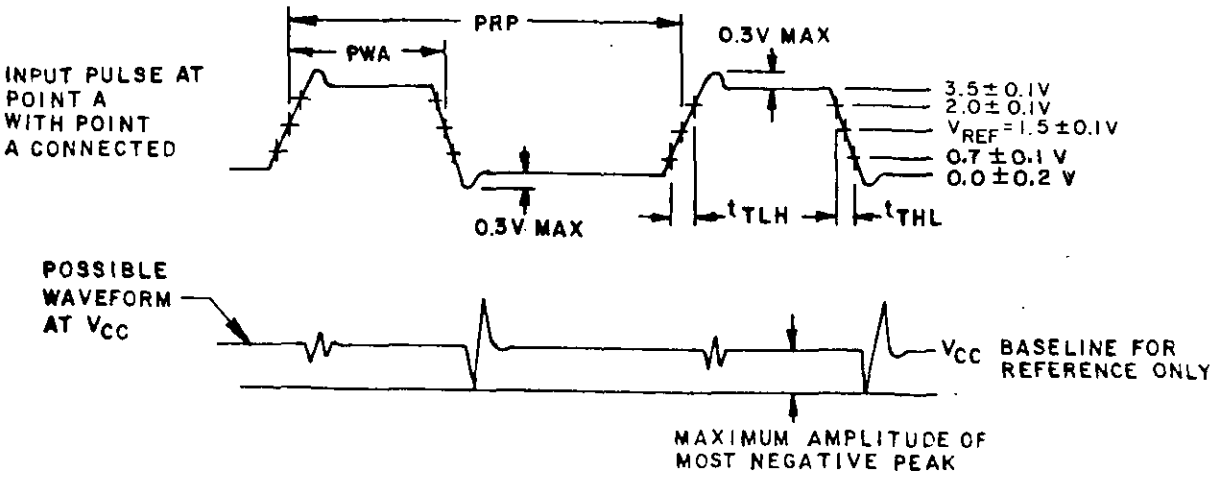

NOTE: Input pulse parameters: With the module connected to item J05, adjust item J05 for the required pulse amplitude, pulse low level voltage and transition times. Verify the input pulse parameters at each input pin before making the measurement.
$t_{TLH} = t_{THL} = 3.5 \pm 1.5$ ns verified at each input pin.
PWA = 500 ±50 ns.
PRP = 1,000 ±200 ns.

FIGURE 22. Power supply transient amplitude test circuit waveforms for table XVIII.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T17:29Z
Check the source to verify that this is the current version before use.

Preparing activity:
Navy - EC

Agent:
DLA - ES

(Project 5963-N690)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T17:29Z
Check the source to verify that this is the current version before use.