INCH-POUND

MIL-M-28787/298A
AMENDMENT 2
30 September 1992
SUPERSEDING
AMENDMENT 1
14 February 1986

MILITARY SPECIFICATION

MODULES, STANDARD ELECTRONIC

INVERTER, DIGITAL, KEY CODE RHG

This amendment forms a part of Military Specification MIL-M-28787/298A(EC), dated 16 August 1983, and is approved for use by all Departments and Agencies of the Department of Defense.

PAGE 4

*TABLE I, Test conditions E1-E18, Test type column: Delete "X" and substitute "S".

*TABLE I, Test conditions F1-F18, Test type column: Delete "X" and substitute "S".

PAGE 5

*TABLE I, Test conditions W1-W18, Max columns: Delete "15" (five places) and substitute "18" (five places).

PAGE 6

*4.4.2: Delete and substitute the following:

"4.4.2 Order of testing. Test conditions A through W shall be performed in any order with the following exceptions. Test conditions A, B, C, E, and F are stress tests and shall be performed only at 25 ± 5°C. If test conditions A, B, C, E, or F are part of a sequence of tests, the order of testing shall be as follows: A, B, C, E, and F where applicable, followed by the remaining tests in the sequence."

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T17:29Z
Check the source to verify that this is the current version before use.

*4.5.1, fifth and sixth lines: Delete "D through T and V" and substitute "D, G through T, and V".

*4.5.3, third and fourth lines: Delete "D through T and V" and substitute "D, G through T, and V".

*4.5.3, sixth line: Delete "D through W" and substitute "D, and G through W".

PAGE 55

*FIGURE 22: Delete and substitute new figure 22 as printed on page 3 of this amendment.

PAGE 56

*TABLE XX, Test conditions W1-W18, Max column: Delete "15" and substitute "18".

PAGE 57

*FIGURE 23, NOTE 3: Delete "Frequency = 120 Hz." and substitute "Frequency = 1 KHz."

NOTE: The margins of this amendment are marked with an asterisk or vertical lines to indicate where changes (additions, modifications, corrections, deletions) from the previous amendment were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous amendment.


Custodians:
Army - ER
Navy - SH
Air Force - 85

Review activities:
Army - AT
Navy - AS, MC
Air Force - 13, 19
DLA - ES

Preparing activity:
Navy - NW

(Project 5963-0274)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T17:29Z
Check the source to verify that this is the current version before use.

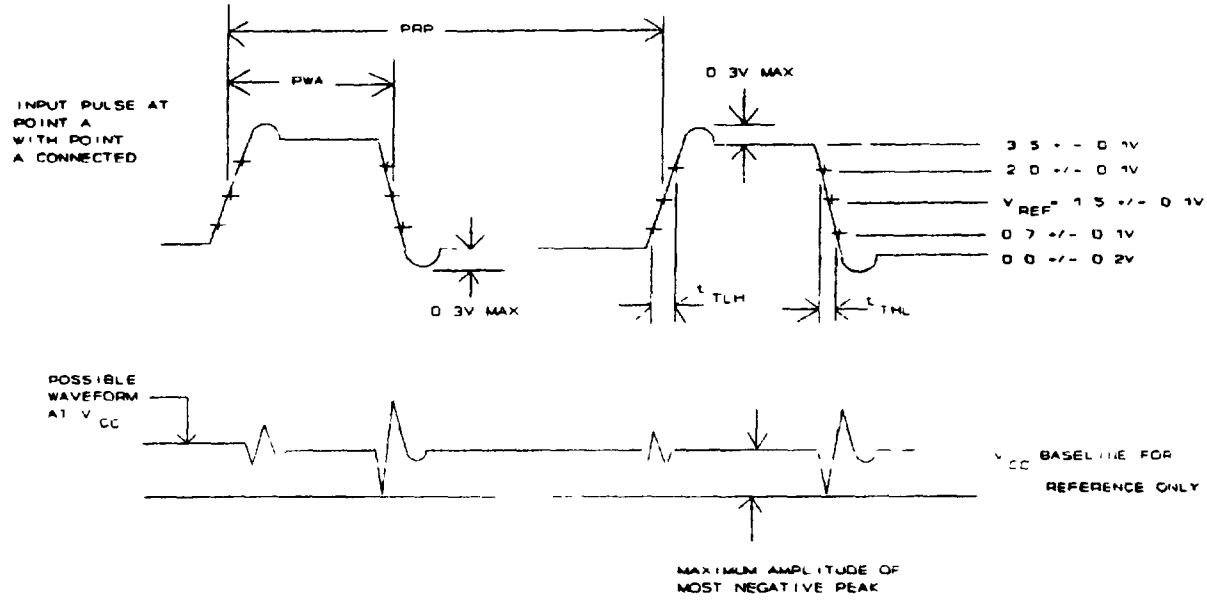

NOTE: Input pulse parameters: With the module connected to item J05, adjust item J05 for the required pulse amplitude, pulse low level voltage and transition times. Verify the input pulse parameters at each input pin before making the measurement.

$t_{TLH} = t_{THL} = 3.5 \pm 1.5$ ns verified at each input pin.
PWA = 500 $\pm$ 50 ns.
PRP = 1,000 $\pm$ 200 ns.

FIGURE 22. Power supply transient amplitude test circuit waveforms for table XVIII.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T17:29Z
Check the source to verify that this is the current version before use.