MILITARY SPECIFICATION

MODULES, STANDARD ELECTRONIC

MEMORY, RANDOM ACCESS, KEY CODE ZJT

This amendment forms a part of Military Specification MIL-M-28787/303A(EC), dated 21 October 1982, and is approved for use by the Naval Electronic Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

PAGES 4, 5, AND 6

TABLE I, Class II columns heading: Delete "100°" and substitute "85°".

PAGE 4

TABLE I, Test condition F1-F4, Min columns: Delete "-30" (five places) and substitute "-20" (five places).

PAGE 8

6.5, second line: Delete "100°" and substitute "85°".

PAGE 26

TABLE VII: Delete and substitute new table VII as printed on page 2 of this amendment.

PAGES 51 AND 52

FIGURE 22: Delete and substitute new figure 22 as printed on pages 3 and 4 of this amendment.

Agent:
DLA - ES

Preparing activity:
Navy - EC

(Project 5963-N485)

FSC 5963

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T17:33Z
Check the source to verify that this is the current version before use.

TABLE VII. Output short circuit current test.

Test condition	Parameter		Connect A to pin	Initial limits 25°C ±5°C ambient Min	Initial limits 25°C ±5°C ambient Max	Unit	Test figure
F1	BDO1	Output short circuit current	22	-20	-70	mA	11
F2	BDO2	"	26	"	"	"	"
F3	BDO3	"	13	"	"	"	"
F4	BDO4	"	36	"	"	"	"
F5	RDO1	"	21	-30	-250	"	"
F6	RDO2	"	28	"	"	"	"
F7	RDO3	"	9	"	"	"	"
F8	RDO4	"	11	"	"	"	"

TABLE VIII. Input clamp diode voltage test.

Test condition	Parameter		Connect A to pin	Initial limits 25°C ±5°C ambient Min	Initial limits 25°C ±5°C ambient Max	Unit	Test figure
G1	$\overline{OE}$1	Input clamp diode voltage	27	-0.4	-1.5	V	12
G2	$\overline{OE}$2	"	8	"	"	"	"
G3	$\overline{OE}$3	"	29	"	"	"	"
G4	$\overline{OE}$4	"	30	"	"	"	"

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T17:33Z
Check the source to verify that this is the current version before use.

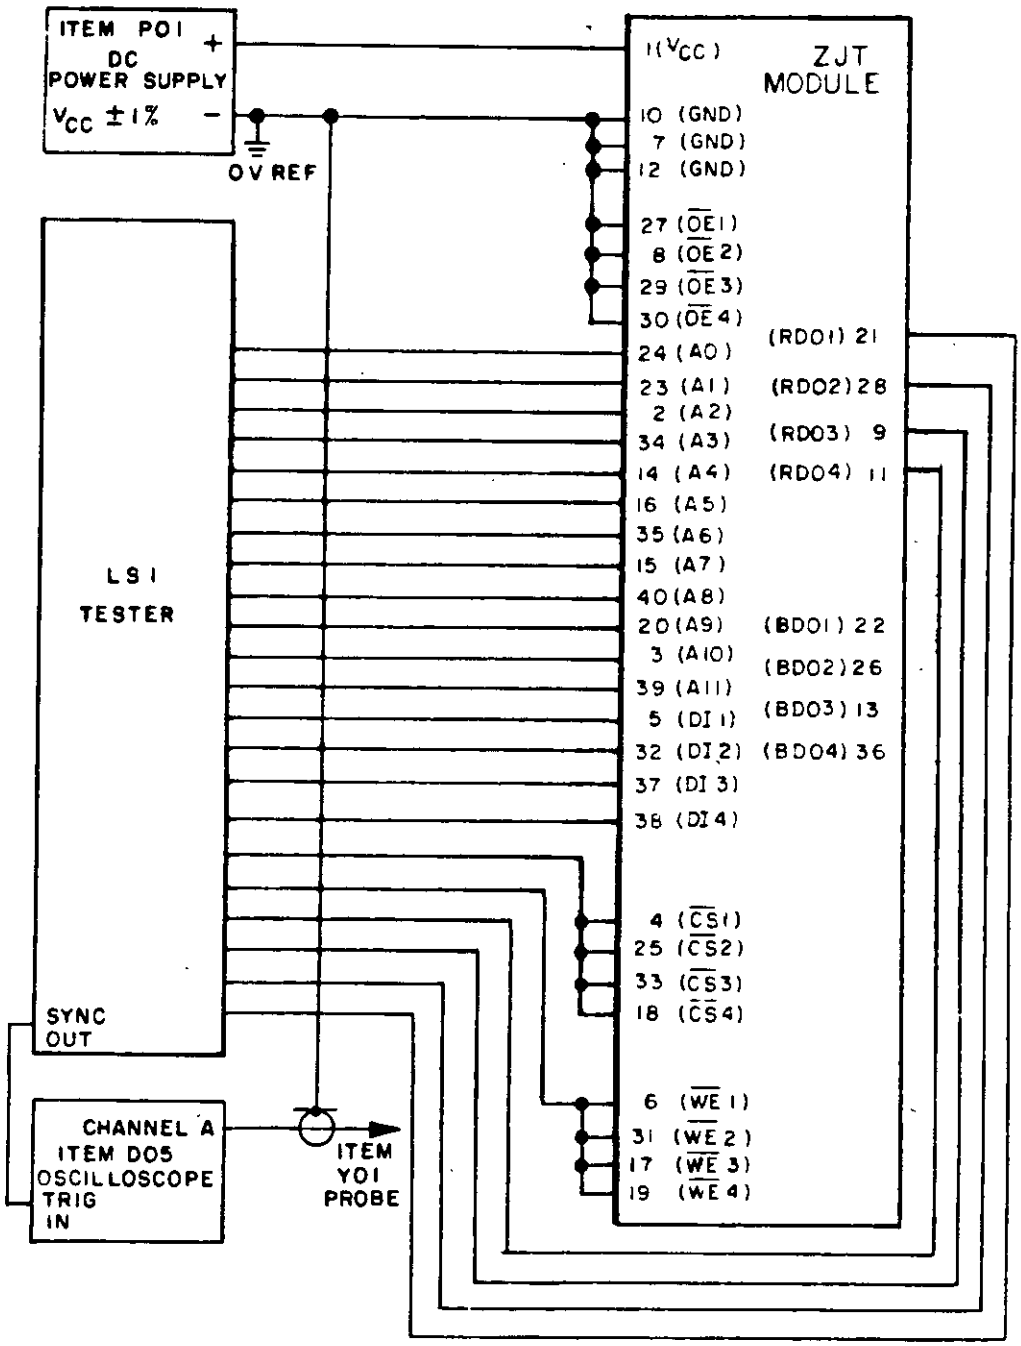


FIGURE 22. Dynamic test circuit for table XVI.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T17:33Z
Check the source to verify that this is the current version before use.

NOTES:
1. V_{CC} = 4.5 V ±1% for test conditions R1, R3, R5, R7, R9, R11, R13, and R15.
2. V_{CC} = 5.5 V ±1% for test conditions R2, R4, R6, R8, R10, R12, R14, and R16
3. Load output pins 9, 11, 21, and 28 with load as specified on figure 14 wit
   C_L = 50 pF for test conditions R1-R8.
4. Load output pins 9, 11, 21, and 28 with load as specified on figure 14 wit
   C_L = 150 pF for test conditions R9-R16.

FIGURE 22. Dynamic test circuit for table XVI - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T17:33Z
Check the source to verify that this is the current version before use.