INCH-POUND

MIL-M-28787/303A(SH)
AMENDMENT 2
6 January 1992
SUPERSEDING
AMENDMENT 1
8 July 1983

# MILITARY SPECIFICATION

## MODULES, STANDARD ELECTRONIC

## MEMORY, RANDOM ACCESS, KEY CODE ZJT

This amendment forms a part of Military Specification MIL-M-28787/303A(EC), dated 21 October 1982, and is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

### PAGE 4

* TABLE I, Test conditions F1-F4 and F5-F8, Test type column Delete "X" and substitute "S" (two places)

TABLE I, Test conditions F1-F4, Min columns Delete "-30" (five places) and substitute "-20" (five places).

* TABLE I, Test conditions F5-F8, Max columns Delete "-250" (five places) and substitute "-400" (five places).

* TABLE I, Test conditions G1-G4, Test type column: Delete "X" and substitute "S".

### PAGES 4, 5, AND 6

TABLE I, Class II column heading: Delete "100" (three places) and substitute "85" (three places).


DISTRIBUTION STATEMENT A. Approved for public release, distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T17:33Z
Check the source to verify that this is the current version before use.

PAGE 5

* TABLE I, Test conditions P3–P6, Min columns: Delete "50" (five places) and substitute "32" (five places).

PAGE 7

* 4.4.2. Delete and substitute the following:

"4.4.2 Order of testing. Test conditions A through Y shall be performed in any order with the following exceptions. Test conditions A, B, C25–C28, F, and G are stress tests and shall be performed only at 25 ± 5°C. If test conditions A, B, C25–C28, F, and G are part of a sequence of tests, the order of testing shall be as follows. A, B, C25–C28, F, and G where applicable, followed by the remaining tests in the sequence."

* 4.5.1, sixth line. Delete "D through W" and substitute "D, E, and H through W"

* 4.5.3, fourth line Delete "D through W" and substitute "D, E, and H through W"

* 4.5.3, sixth line: Delete "D through Y" and substitute "D, E, and H through W"

PAGE 8

6.5, second line Delete "100°" and substitute "85°"

PAGE 26

TABLE VII: Delete and substitute new table VII as printed on page 4 of this amendment

PAGES 51 AND 52

FIGURE 22: Delete and substitute new figure 22 as printed on page 5 of this amendment



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T17:33Z
Check the source to verify that this is the current version before use.

NOTE: The margins of this amendment are marked with an asterisk or vertical lines to indicate where changes (additions, modifications, corrections, deletions) from the previous amendment were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous amendment.

Preparing activity:
Navy – SH

(Project 5963–N805)

Agent: NW



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T17:33Z
Check the source to verify that this is the current version before use.

TABLE VII. Output short circuit current test


| Test condition | Parameter | Connect | Initial limits 25 ± 5°C, ambient | | Unit | Test figure |
|---|---|---|---|---|---|---|
| | | A to pin | Min | Max | | |
| F1 | BDO1 Output short circuit current | 22 | -20 | -70 | mA | 11 |
| F2 | BDO2 Output short circuit current | 26 | -20 | -70 | mA | 11 |
| F3 | BDO3 Output short circuit current | 13 | -20 | -70 | mA | 11 |
| F4 | BDO4 Output short circuit current | 36 | -20 | -70 | mA | 11 |
| F5 | RDO1 Output short circuit current | 21 | -30 | -400 | mA | 11 |
| F6 | RDO2 Output short circuit current | 28 | -30 | -400 | mA | 11 |
| F7 | RDO3 Output short circuit current | 9 | -30 | -400 | mA | 11 |
| F8 | RDO4 Output short circuit current | 11 | -30 | -400 | mA | 11 |

TABLE VIII Input clamp diode voltage test

| Test condition | Parameter | Connect | Initial limits 25 ± 5°C, ambient | | Unit | Test figure |
|---|---|---|---|---|---|---|
| | | A to pin | Min | Max | | |
| G1 | $\overline{OE}$1 Input clamp diode voltage | 27 | -0 4 | -1.5 | V | 12 |
| G2 | $\overline{OE}$2 Input clamp diode voltage | 8 | -0 4 | -1.5 | V | 12 |
| G3 | $\overline{OE}$3 Input clamp diode voltage | 29 | -0 4 | -1.5 | V | 12 |
| G4 | $\overline{OE}$4 Input clamp diode voltage | 30 | -0 4 | -1.5 | V | 12 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T17:33Z
Check the source to verify that this is the current version before use.

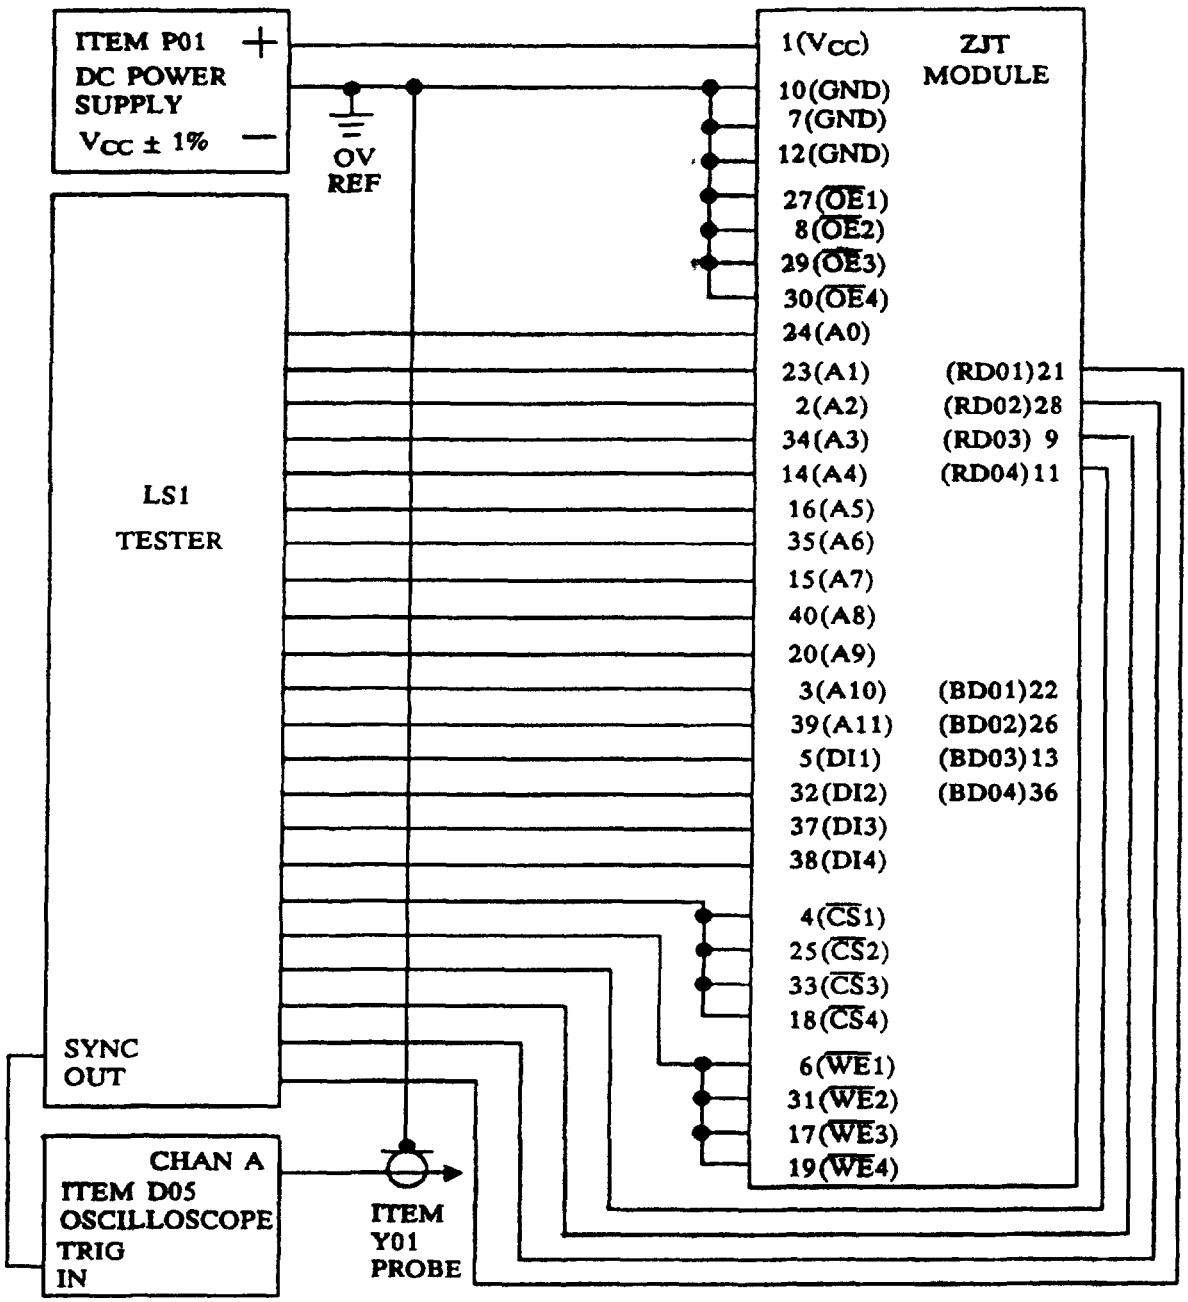


NOTES:
1. $V_{CC}$ = 4.5V ± 1% for test conditions R1, R3, R5, R7, R9, R11, R13, and R15.
2. $V_{CC}$ = 5.5V ± 1% for test conditions R2, R4, R6, R8, R10, R12, R14, and R16
3. Load output pins 9, 11, 21, and 28 with load as specified on figure 14 with $C_L$ = 50pF for test conditions R1-R8.
4. Load output pins 9, 11, 21, and 28 with load as specified on figure 14 with $C_L$ = 150pF for test conditions R9-R16..

FIGURE 22. Dynamic test circuit for table XVI.



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T17:33Z
Check the source to verify that this is the current version before use.