MILITARY SPECIFICATION

MODULES, STANDARD ELECTRONIC

REGULATOR, CURRENT, PROGRAMMABLE, ANALOG, KEY CODE MJB

This specification is approved for use by the Naval Electronic Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This document establishes the requirements and test procedures for the acquisition of an electronic programmable current regulator module.

1.2 Classification. This specification covers two classes of modules.

Class I and class II as specified in MIL-STD-1389.

2. APPLICABLE DOCUMENTS

2.1 Government specifications and standards. Unless otherwise specified, the following specifications and standards, of the issue listed in that issue of the Department of Defense Index of Specifications ard Standards specified in the solicitation, form a part of this specification to the extent specified herein.

SPECIFICATION

MILITARY

MIL-M-28787 - Modules, Standard Electronic, General Specification for.

STANDARDS

MILITARY

MIL-STD-1389 - Design Requirements for Standard Electronic Modules.

MIL-STD-1665 - Test Equipment for the Standard Electronic Modules Program.

(Copies of specifications, standards, handbooks, drawings, and publications required by manufacturers in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting officer.)

2.2 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein, the text of this specification shall take precedence.

3. REQUIREMENTS

3.1 General requirements. The module shall comply with the requirements of MIL-M-28787 except as modified herein.

3.2 Correlation requirements. Before any production modules are tested, all testers and test equipment shall be correlated in accordance with MIL-M-28787.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Naval Electronic Systems Command, ATTN: ELEX 8111, Department of the Navy, Washington, DC 20360, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 202610-20T17:36Z
Check the source to verify that this is the current version before use.

3.3 Failure rate requirements. All modules acquired to this specification shall have a predicted failure rate no greater than 0.193 failures per million operating hours for class I or 0.594 failures per million operating hours for class II, when predicted in accordance with MIL-STD-1389. When a class II module is used in a class I environment, failure rate for class I shall be used for reliability prediction (see 6.3).

3.4 Performance requirements. The module shall conform to the electrical requirements specified in table I. Class I modules shall conform to the electrical requirements of class I only, and class II modules shall conform to the electrical requirements of class I and class II (see 6.3).

3.5 Module configuration requirements. The module configuration requirements shall be in accordance with MIL-STD-1389 and as specified herein.

3.5.1 Key code. The module key code shall be MJB.

3.5.2 Size. The module size shall be 1A.

3.5.3 Weight. The module shall have a maximum weight of 35 grams.

3.5.4 Contact pins. The module shall have 40 contact pins positioned A1 through A40.

3.5.5 Fin position. The module shall have an insertion and extraction and heat dissipation fin on increment A.

3.5.6 Depth. The module shall have no additional depth requirements.

3.5.7 Holddown holes. The module shall have no additional requirements for location or quantity of holddown holes.

3.5.8 Marking. Marking shall be as specified in MIL-STD-1389, and the module shall be marked with the military part number M28787/307-1 for class I and M28787/307-2 for class II, except no marking shall interfere with heat dissipation from the fin (for example, affixing a label which may be a heat barrier).

3.6 Circuit pin configuration. The function diagram and pin assignments shall conform to figure 1.

3.7 Acceptance tests. All production modules shall be tested in accordance with footnotes 1 and 2 of table I.

3.8 End-of-life limits. Modules which have been plugged into an operating system, or exceed 2 years from date of manufacture and are to be tested, shall be capable of conforming to the 25°C end-of-life limits of table I (see 6.2).

3.9 Power supply voltage. The module shall be capable of conforming to the requirements of table I for a power supply voltage (V_{CC}) of 5.0 ±0.5 Vdc when driving the specified load in either logic state, except that the limits for output short circuit current and output impedance apply only for a power supply voltage of 5.5 Vdc ±1 percent.

4. QUALITY ASSURANCE PROVISIONS


4.1 Quality assurance. The quality assurance provisions of MIL-M-28787 shall apply.

4.2 Acceptance tests. Acceptance tests of all modules shall be in accordance with procedures and equipment specified in MIL-M-28787.

4.3 Test equipment. Test equipment specified on figures and in tables with a type designator shall be as specified in MIL-STD-1665. Other equipment and components shall be as specified on the figures. All resistors shall be metal film and all capacitors shall be ceramic unless otherwise specified.

4.4 Test procedures. The module shall be tested as specified in table I.

Source: https://assist.dla.mil -- Downloaded: 202610-20T17:36Z
Check the source to verify that this is the current version before use.

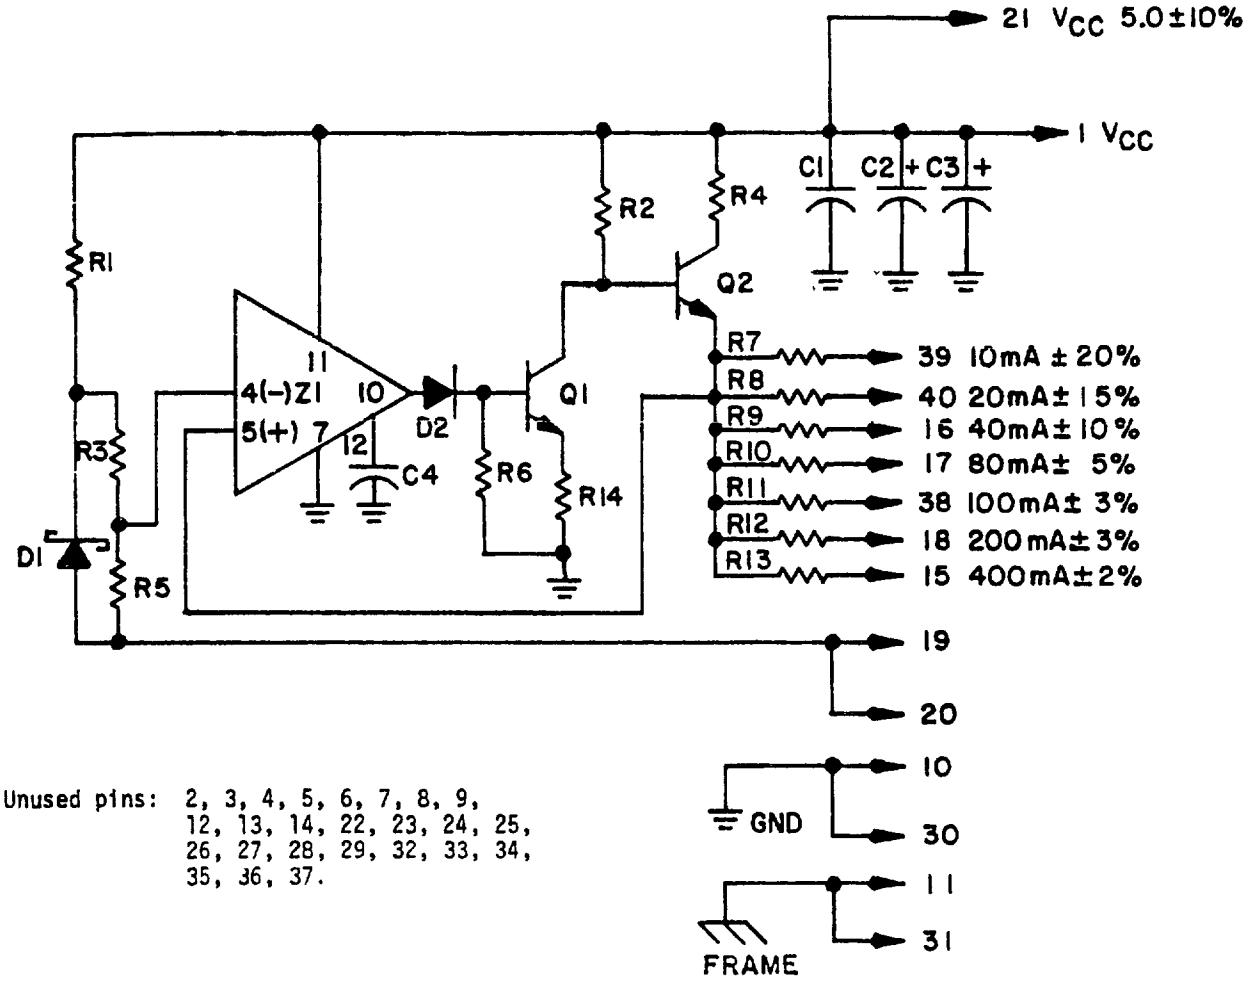

Unused pins: 2, 3, 4, 5, 6, 7, 8, 9, 12, 13, 14, 22, 23, 24, 25, 26, 27, 28, 29, 32, 33, 34, 35, 36, 37.

FIGURE 1. MJB module function diagram, programmable regulated current supply.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T17:36Z
Check the source to verify that this is the current version before use.

* TABLE I. Module electrical requirements.

Test condition	Parameter	Ref test table	Test type 1/-3/	25° ±5°C 4/		Class I 4/				Class II 4/				Unit
						0° ±5°C		60° ±5°C		-55° ±5°C		85° ±5°C		
				Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	
A1-A4	Continuity	III	X	0	1	0	1	0	1	0	1	0	1	Ω
B1, B2	Frame continuity	IV	S	0	1	0	1	0	1	0	1	0	1	Ω
C1, C2	Isolation													
	Initial	V	S	10	∞	10	∞	10	∞	10	∞	10	∞	MΩ
	End-of-life	V	S	1	∞	1	∞	1	∞	1	∞	1	∞	MΩ
D	Voltage stress	VI	X	530	570	530	570	530	570	530	570	530	570	mA
E	Power supply current	VII	X	550	600	550	600	550	600	550	600	550	600	mA
F	Power supply filter capacitance	VIII	S	3.6	5.4	3.6	5.4	3.6	5.4	3.6	5.4	3.6	5.4	µF
G	Zener bias	IX	X	1	2	1	2	1	2	1	2	1	2	mA
H1	Programmability (V_{CC} = 4.5 V)	X	X	8	12	8	12	8	12	8	12	8	12	mA
H2	Programmability (V_{CC} = 4.5 V)	X	X	17	23	17	23	17	23	17	23	17	23	mA
H3	Programmability (V_{CC} = 4.5 V)	X	X	36	44	36	44	36	44	36	44	36	44	mA
H4	Programmability (V_{CC} = 4.5 V)	X	X	76	84	76	84	76	84	76	84	76	84	mA
H5	Programmability (V_{CC} = 4.5 V)	X	X	97	103	97	103	97	103	97	103	97	103	mA
H6	Programmability (V_{CC} = 4.5 V)	X	X	194	206	194	206	194	206	194	206	194	206	mA
H7	Programmability (V_{CC} = 4.5 V)	X	X	392	408	392	408	392	408	392	408	392	408	mA
H8	Programmability (V_{CC} = 4.5 V)	X	X	489	511	489	511	489	511	489	511	489	511	mA
J1	Programmability (V_{CC} = 5.0 V)	X	X	8	12	8	12	8	12	8	12	8	12	mA
J2	Programmability (V_{CC} = 5.0 V)	X	X	17	23	17	23	17	23	17	23	17	23	mA
J3	Programmability (V_{CC} = 5.0 V)	X	X	36	44	36	44	36	44	36	44	36	44	mA
J4	Programmability (V_{CC} = 5.0 V)	X	X	76	84	76	84	76	84	76	84	76	84	mA
J5	Programmability (V_{CC} = 5.0 V)	X	X	97	103	97	103	97	103	97	103	97	103	mA

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T17:36Z
Check the source to verify that this is the current version before use.

* TABLE I. Module electrical requirements - Continued.

Test condition	Parameter	Ref test table	Test type 1/-3/	25° ±5°C 4/		Class I 4/				Class II 4/				Unit
						0° ±5°C		60° ±5°C		-55° ±5°C		85° ±5°C		
				Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	
J6	Programmability (V_{CC} = 5.0 V)	X	X	194	206	194	206	194	206	194	206	194	206	mA
J7	Programmability (V_{CC} = 5.0 V)	X	X	392	408	392	408	392	408	392	408	392	408	mA
J8	Programmability (V_{CC} = 5.0 V)	X	X	489	511	489	511	489	511	489	511	489	511	mA
K1	Programmability (V_{CC} = 5.5 V)	X	X	8	12	8	12	8	12	8	12	8	12	mA
K2	Programmability (V_{CC} = 5.5 V)	X	X	17	23	17	23	17	23	17	23	17	23	mA
K3	Programmability (V_{CC} = 5.5 V)	X	X	36	44	36	44	36	44	36	44	36	44	mA
K4	Programmability (V_{CC} = 5.5 V)	X	X	76	84	76	84	76	84	76	84	76	84	mA
K5	Programmability (V_{CC} = 5.5 V)	X	X	97	103	97	103	97	103	97	103	97	103	mA
K6	Programmability (V_{CC} = 5.5 V)	X	X	194	206	194	206	194	206	194	206	194	206	mA
K7	Programmability (V_{CC} = 5.5 V)	X	X	392	408	392	408	392	408	392	408	392	408	mA
K8	Programmability (V_{CC} = 5.5 V)	X	X	489	511	489	511	489	511	489	511	489	511	mA
L	Regulation check	XI	X	-1	+1	-1	+1	-1	+1	-1	+1	-1	+1	%
M	Recovery time	XII	X	0	15	0	15	0	15	0	15	0	15	µs
N	Power supply transient amplitude	XII	Q	0.0	1.5	0.0	1.5	0.0	1.5	0.0	1.5	0.0	1.5	V
P1, P2	Accuracy (min load and max load)	XIII	X	533	567	533	567	533	567	533	567	533	567	mA

1/ "X" parameters shall be 100 percent tested during module acceptance tests.

2/ "S" parameters shall be sample acceptance tested (1 percent or two modules from each inspection lot, whichever is greater) at 25°C.

3/ "Q" parameters shall be tested during qualification testing only.

4/ Unless otherwise specified, limits are for initial and end-of-life.

Source: https://assist.dla.mil -- Downloaded: 2026-0-20T17:36Z
Check the source to verify that this is the current version before use.

4.4.1 Alternate test methods. Alternate test methods may be employed if approved by the Standard Electronic Modules Program Quality Assurance ..tivity and they conform to the requirements of MIL-M-28787.

4.4.2 Order of testing. Test conditions A through P shall be performed in any order with the following exceptions. If test condition C or D is part of a sequence of tests, the order of testing shall be as follows: C, D where applicable, followed by the remaining tests in the sequence.

4.5 Qualification testing. Initial qualification tests and periodic-check tests shall be performed in accordance with the test plan specified in MIL-M-28787 with the following modifications or additions.

4.5.1 Operating temperature tests. The operating temperature tests shall be conducted in accordance with MIL-M-28787. Before starting these tests, test conditions A through P in table I shall be performed in the order specified in 4.4.2 using the initial limits at 25° ±5°C ambient. When electrical testing is called for at the end of each temperature stabilization period, test conditions A and E through P shall be performed in the order specified in 4.4.2 using the initial limits for applicable operating temperature. At all other times during the operating temperature tests, the module shall be operated in the test circuit shown on figure 2.

4.5.1.1 Component temperature test. The component temperature test shall be conducted in accordance with MIL-M-28787. The module shall be operated as shown on figure 2.

4.5.2 Vibration tests. The vibration tests shall be conducted in accordance with MIL-M-28787. During the vibration tests, the module shall be operated in the test circuit shown on figure 3. Following the vibration tests, the electrical tests of table I which are marked with an "X" in the test type column, and test condition F shall be performed using the initial limits at 25° ±5°C ambient.

4.5.3 Life test. The life test shall be conducted in accordance with MIL-M-28787. The module shall be operated as shown on figure 2. Following the life test and while still at the maximum class temperature, electrical tests A and E through P shall be performed in the order specified in 4.4.2 using the operating temperature end-of-life requirements of table I. Following the return of the module to 25°C, electrical tests A through C and E through P shall be performed in the order specified in 4.4.2 using the 25° ±5°C ambient end-of-life requirements of table I.

5. PACKAGING

5.1 Packaging requirements. The requirements for packaging shall be in accordance with MIL-M-28787.

6. NOTES

6.1 Definitions. Definitions are as specified in MIL-STD-1331.

6.2 End-of-life. When any individual module circuit parameter fails to conform to the end-of-life requirements of table I, the module is considered to have completed its useful life (see 3.8).

6.3 Substitutability. Class II modules are substitutable for class I modules. When class II modules are used in a class I environment, the failure rate for class I shall be used for reliability prediction (see 3.3 and 3.4).

* 6.4 Module description. The following electrical parameters reflect the 0° to 60°C and -55° to 85°C end-of-life limits from table I.

	Class I	Class II	Unit
Maximum power dissipation	2.83 Max	2.83 Max	Watts
Supply voltage	5.0 ±10%	5.0 ±10%	V dc
Output current	550 ±3% Max	550 ±3% Max	mA

Source: https://assist.dla.mil -- Downloaded: 202610-20T17:36Z
Check the source to verify that this is the current version before use.

* 6.5 Module function. This module provides a 550 mA ±3 percent current source for the IIL circuits used on a microprocessor module. This is accomplished by connecting the appropriate set of programming resistors R7 through R13 to output pins 19 and 20 (see table II).

6.5.1 Current programming. Each current regulator has the following connections for programming the output currents (see table II).

6.6 Changes from previous issue. The margins of this specification are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Agent:
DLA - ES

Preparing activity:
Navy - EC


(Project 5963-N361)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T17:36Z
Check the source to verify that this is the current version before use.

TABLE II. Current programming.

Current	Connect to pins 19 & 20	Current	Connect to pins 19 & 20	Current	Connect to pins 19 & 20	Current	Connect to pins 19 & 20	Current	Connect to pins 19 & 20
10 mA	39	120 mA	38,40	230 mA	18,39,40	340 mA	18,38,16	450 mA	15,16,39
20 mA	40	130 mA	38,39,40	240 mA	18,16	350 mA	18,38,16,39	460 mA	15,16,40
30 mA	39,40	140 mA	38,16	250 mA	18,16,39	360 mA	18,38,16,40	470 mA	15,16,39,40
40 mA	16	150 mA	38,16,39	260 mA	18,16,40	370 mA	18,38,16,39, 40	480 mA	15,17
50 mA	16,39	160 mA	38,16,40	270 mA	18,16,39,40	380 mA	18,38,17	490 mA	15,17,39
60 mA	16,40	170 mA	38,16,39,40	280 mA	18,17	390 mA	18,38,17,39	500 mA	15,38
70 mA	16,39,40	180 mA	38,17	290 mA	18,17,39	400 mA	15	510 mA	15,38,39
80 mA	17	190 mA	38,17,39	300 mA	18,38	410 mA	15,39	520 mA	15,38,40
90 mA	17,39	200 mA	18	310 mA	18,38,39	420 mA	15,40	530 mA	15,38,39,40
100 mA	38	210 mA	18,39	320 mA	18,38,40	430 mA	15,39,40	540 mA	15,38,16
110 mA	38,39	220 mA	18,40	330 mA	18,38,39,40	440 mA	15,16	550 mA	15,38,16,39

Source: https://assist.dla.mil - Downloaded: 2026-02-20T17:36Z
Check the source to verify that this is the current version before use.

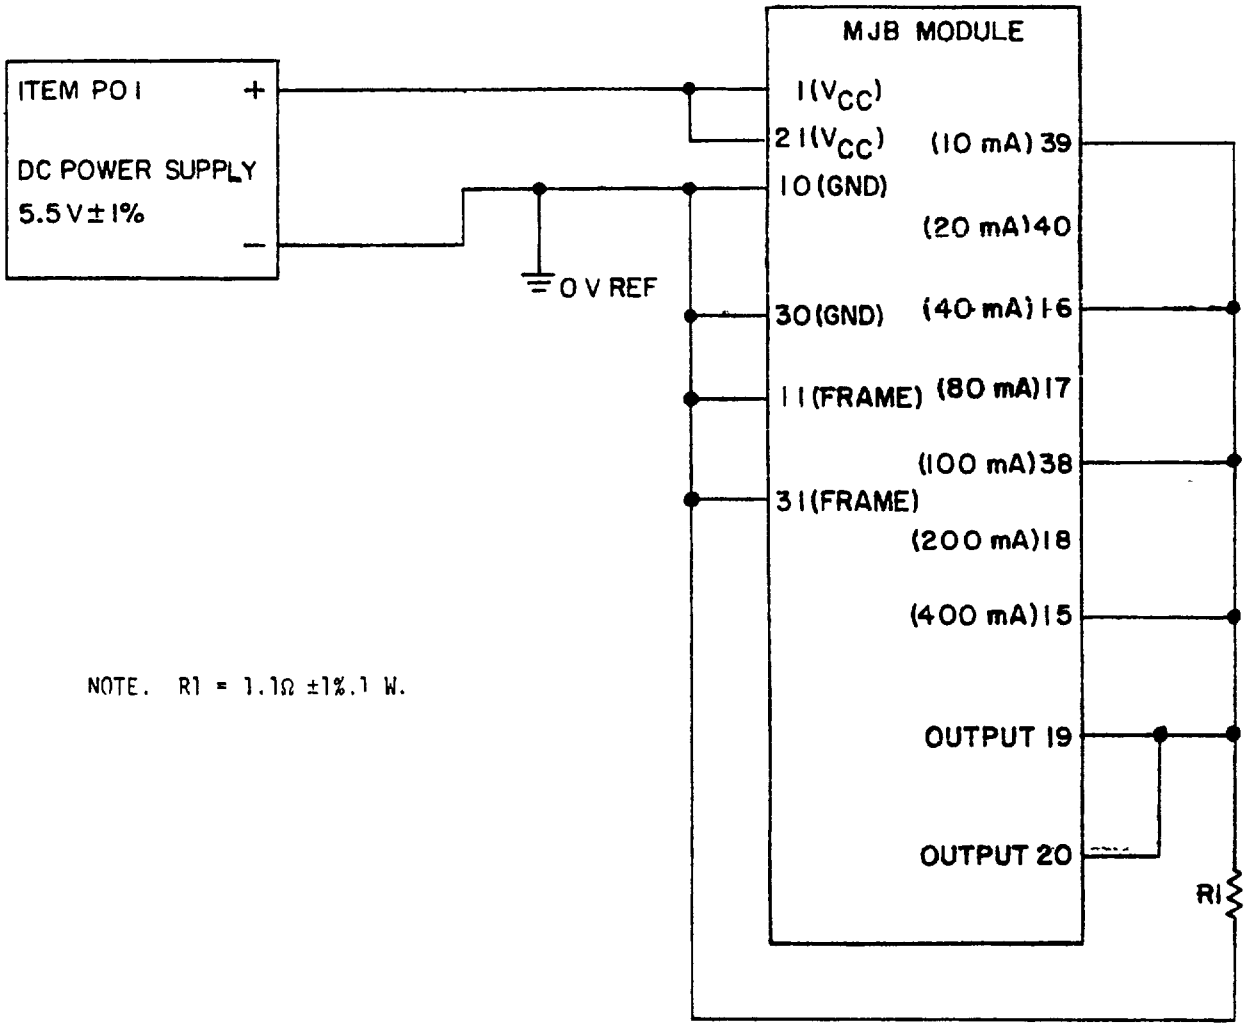

NOTE. R1 = 1.1Ω ±1%.1 W.

FIGURE 2. Operating temperature, component temperature, and life test circuit.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T17:36Z
Check the source to verify that this is the current version before use.

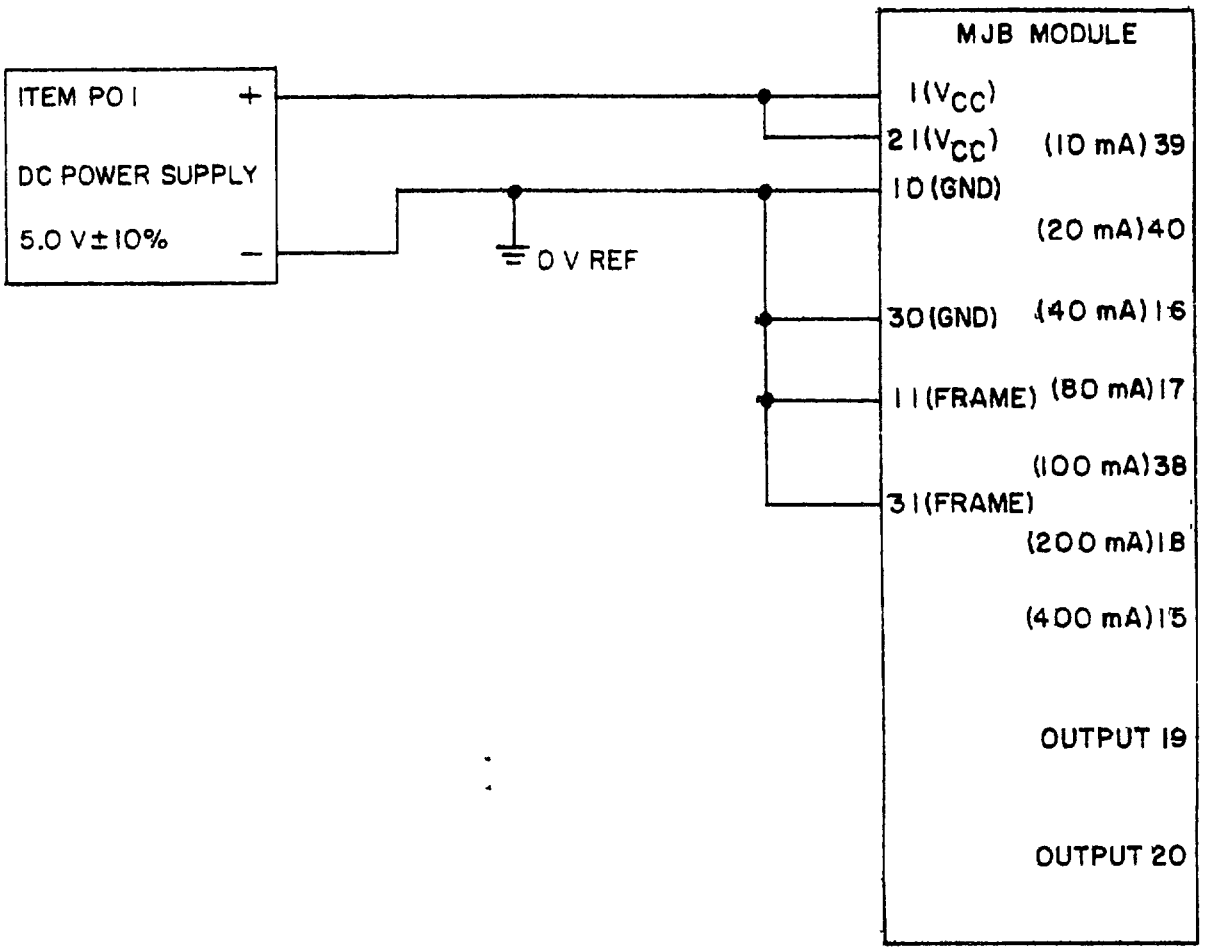


FIGURE 3. Vibration test circuit.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T17:36Z
Check the source to verify that this is the current version before use.

TABLE III. Continuity test.


Test condition	Parameter	Connect		Initial limits 25 ±5°C ambient		Unit	Test figure
		A to pin	B to pin	Min	Max		
A1	Continuity	1	21	0	1	Ω	4
A2	↓	10	30	↓	↓	↓	↓
A3		11	31				
A4		19	20				

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T17:36Z
Check the source to verify that this is the current version before use.

TABLE IV. Frame continuity test.

Test condition	Parameter	Connect		Initial limits 25°±5°C ambient		Unit	Test figure
		A to pin	B to pin	Min	Max		
B1	Frame continuity	11	Frame	0	1	Ω	4
B2	Frame continuity	31	Frame	0	1	Ω	4

Source: https://assist.dla.mil -- Downloaded: 2026-02-20T17:36Z
Check the source to verify that this is the current version before use.

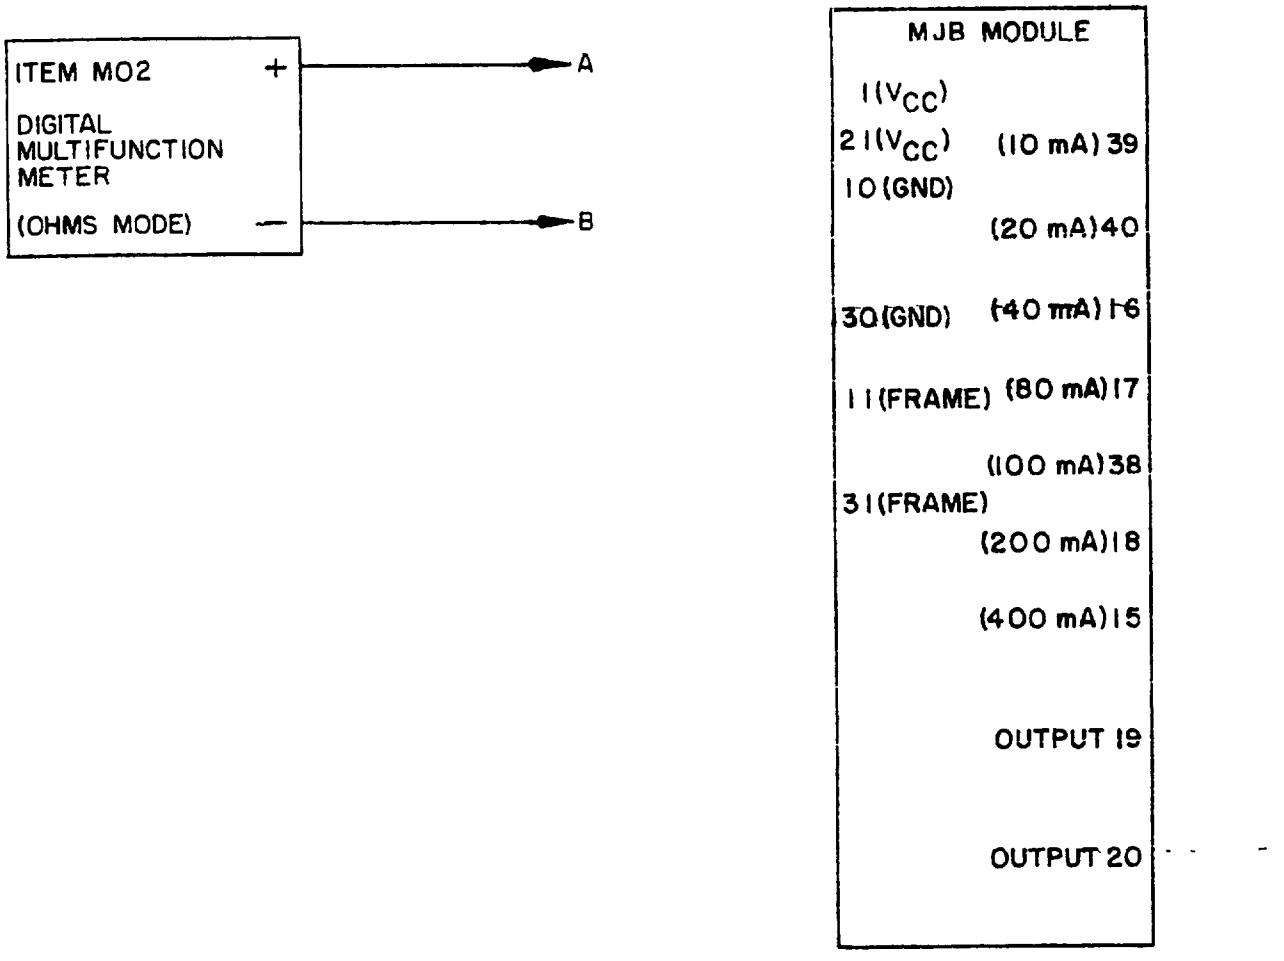

NOTE On test conditions B1 and B2, penetrate the anodized finish of the module frame with a sharply pointed probe connected to the negative terminal

FIGURE 4. Continuity test circuit for tables III and IV.

Source: https://assist.dla.mil - Downloaded: 2026-10-20T17:36Z
Check the source to verify that this is the current version before use.

TABLE V. Isolation test.

Test condition	Parameter	Connect		Initial limits 25°±5°C ambient		Unit	Test figure
		A to pin	B to pin	Min	Max		
C1	Isolation, used pins to frame and unused pins	C	All other pins	10	∞	MΩ	5
C2	Isolation, frame pins to unused pins	11,31	2,3,4,5,6,7,8,9,12,13,14,22,23,24,25,26,27,28,29,32,33,34,35,36,37	10	∞	MΩ	5

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T17:36Z
Check the source to verify that this is the current version before use.

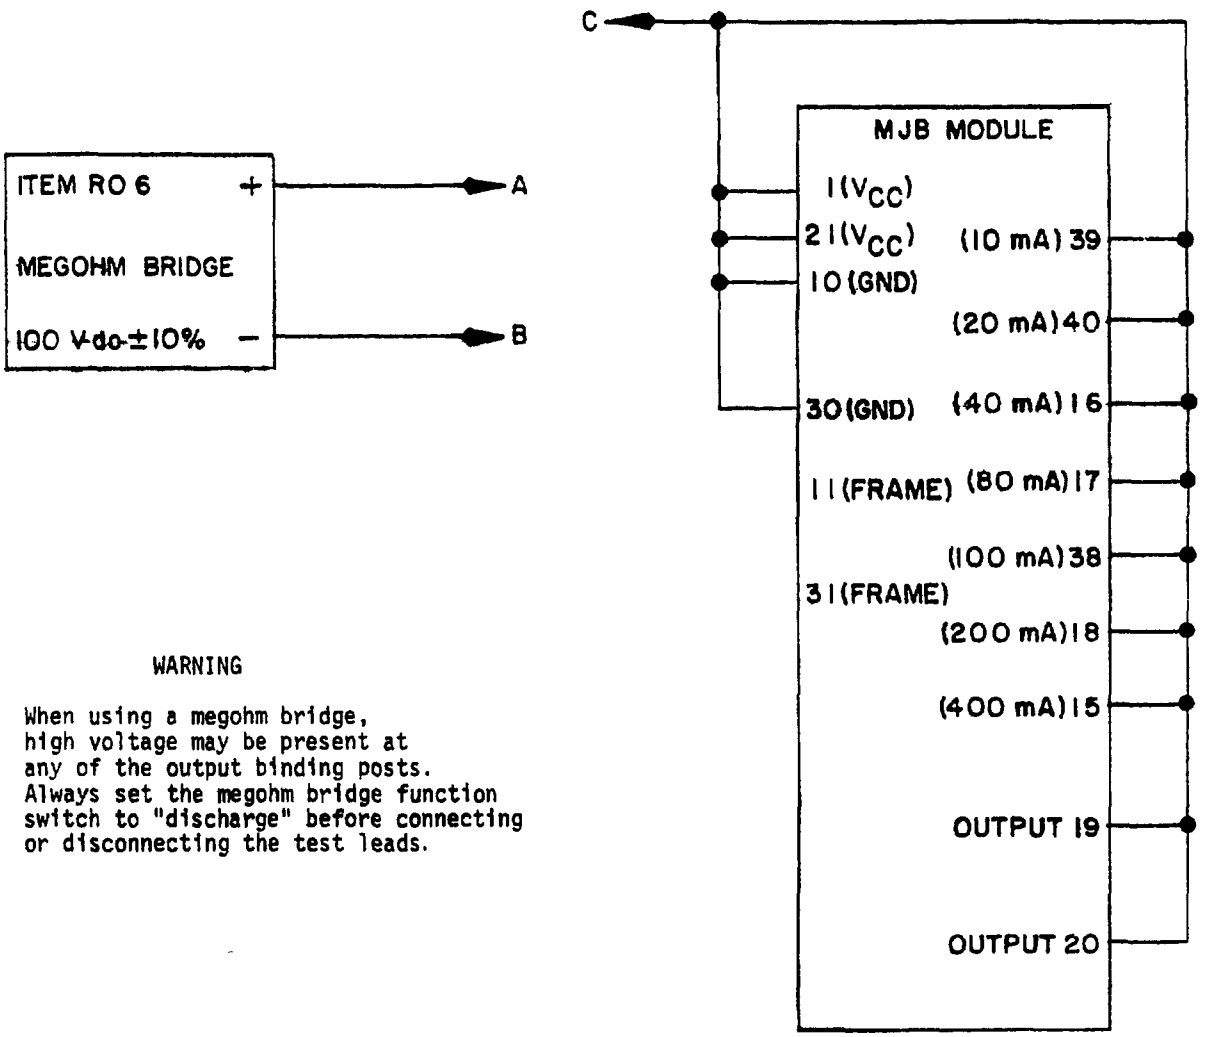


FIGURE 5. Isolation test circuit for table V.

Source: https://assist.dla.mil -- Downloaded: 202640-20T17:36Z
Check the source to verify that this is the current version before use.

TABLE VI. Voltage stress test.

Test condition	Parameter	Initial limits 25°±5°C ambient		Unit	Test figure
		Min	Max		
D	Voltage stress	530	570	mA	6

TABLE VII. Power supply current test.

Test condition	Parameter	Initial limits 25°±5°C ambient		Unit	Test figure
		Min	Max		
E	Power supply current	550	600	mA	7

TABLE VIII. Power supply filter capacitance test.

Test condition	Parameter	Initial limits 25°±5°C ambient		Unit	Test figure
		Min	Max		
F	Power supply filter capacitance	3.6	5.4	µF	8

TABLE IX. Zener bias test.

Test condition	Parameter	Initial limits 25°±5°C ambient		Unit	Test figure
		Min	Max		
G	Zener bias	1	2	mA	9

Source: https://assist.dla.mil -- Downloaded: 2026-02-20T17:36Z
Check the source to verify that this is the current version before use.


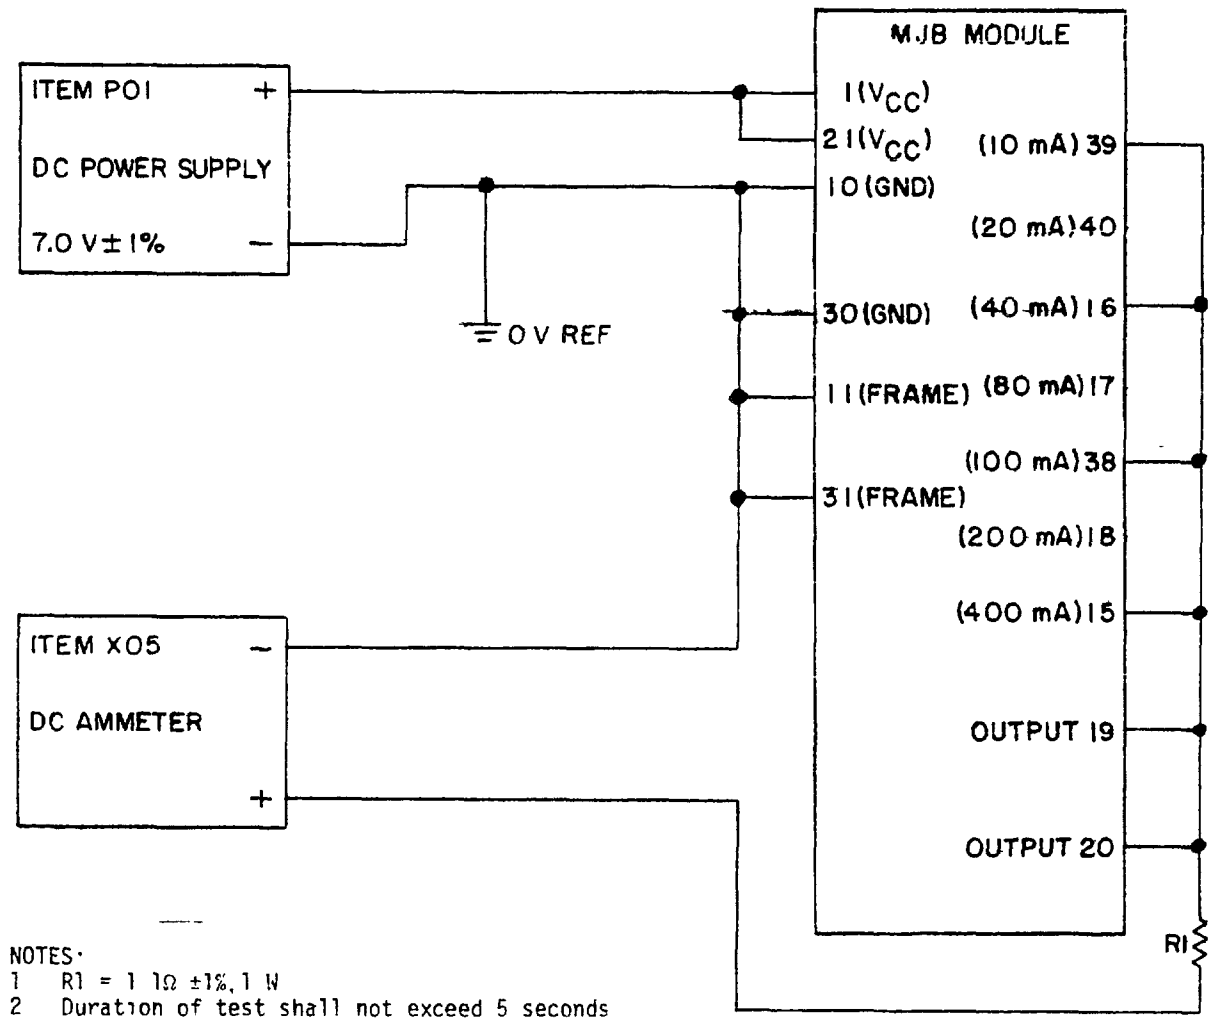


FIGURE 6 Voltage stress test circuit for table VI.


Source: https://assist.dla.mil -- Downloaded: 20260-20T17:36Z
Check the source to verify that this is the current version before use.

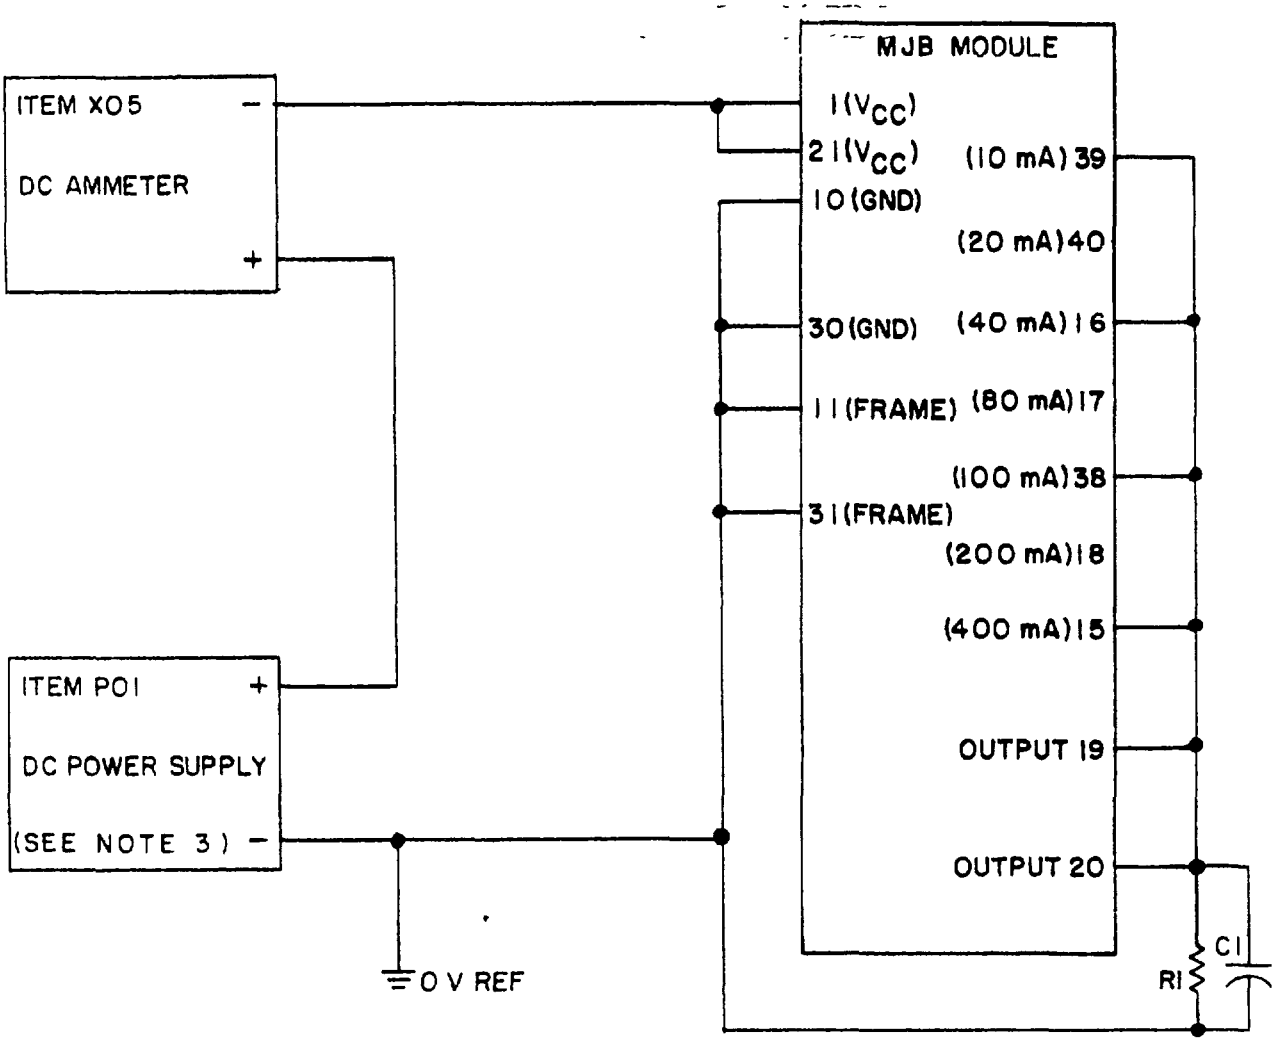

NOTES:
1. R1 = 1 5Ω ±1%, 1 W
2. C1 = 0 47 µF ±20%, 15 Vdc
3. Adjust item PO1 to 5.5 ±0.05 V at module pin 1.

FIGURE 7 Power supply current test circuit for table VII.

Source: https://assist.dla.mil -- Downloaded: 202610-20T17:36Z
Check the source to verify that this is the current version before use.

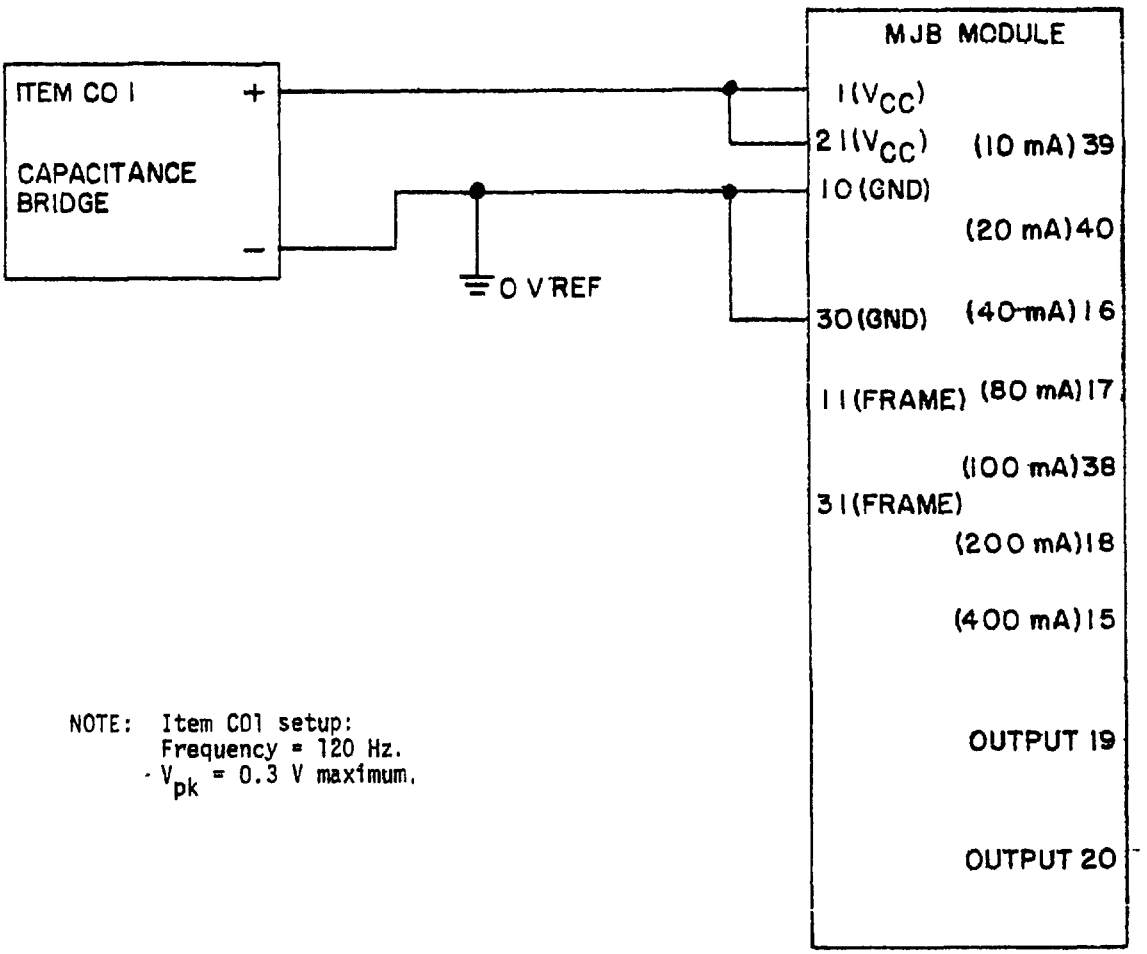

NOTE: Item CO1 setup:
Frequency = 120 Hz.
V_{pk} = 0.3 V maximum.

FIGURE 8. Power supply filter capacitance test circuit for table VIII.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T17:36Z
Check the source to verify that this is the current version before use.

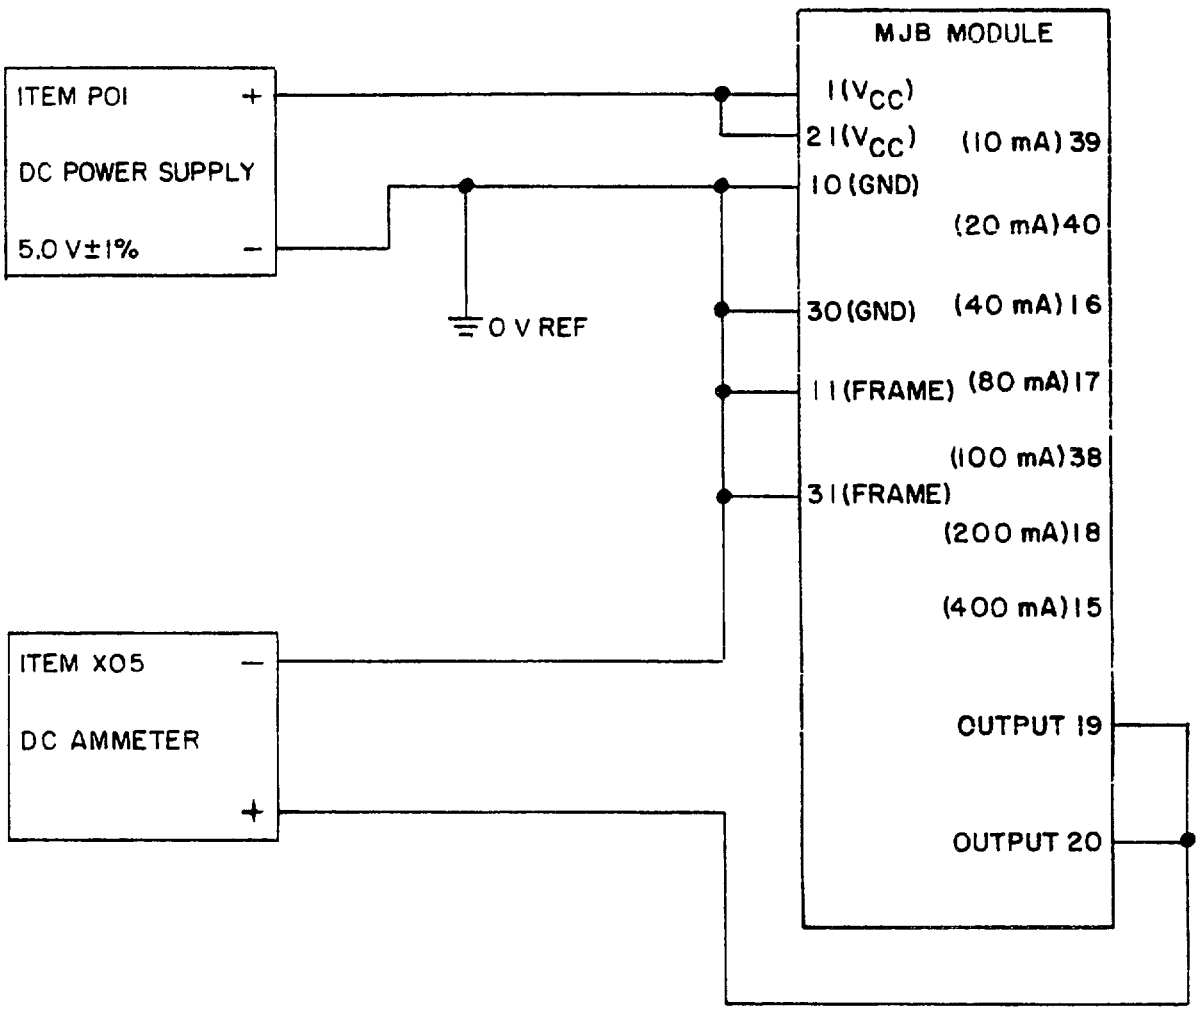


FIGURE 9. Zener bias test circuit for table IX

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T17:36Z
Check the source to verify that this is the current version before use.

TABLE X. Programmability test.


Test condition	Parameter	Connect A to pin	Initial limits 25 ±5°C ambient Min	Initial limits 25 ±5°C ambient Max	Unit	Test figure
H1	Programmability	39	8	12	mA	10
H2		40	17	23		
H3		16	36	44		
H4		17	76	84		
H5		38	97	103		
H6		18	194	206		
H7		15	392	408		
H8		15,38	489	511		
J1		39	8	12		
J2		40	17	23		
J3		16	36	44		
J4		17	76	84		
J5		38	97	103		
J6		18	194	206		
J7		15	392	408		
J8		15,38	489	511		

Source: https://assist.dla.mil -- Downloaded: 2026-02-20T17:36Z
Check the source to verify that this is the current version before use.

TABLE X. Programmability test - Continued.

Test condition	Parameter	Connect	Initial limits 25 ±5°C ambient		Unit	Test figure
		A to pin	Min	Max		
K1	Programmability	39	8	12	mA	10
K2	↓	40	17	23	↓	↓
K3		16	36	44		
K4		17	76	84		
K5		38	97	103		
K6		18	194	206		
K7		15	392	408		
K8		15,38	489	511		

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T17:36Z
Check the source to verify that this is the current version before use.

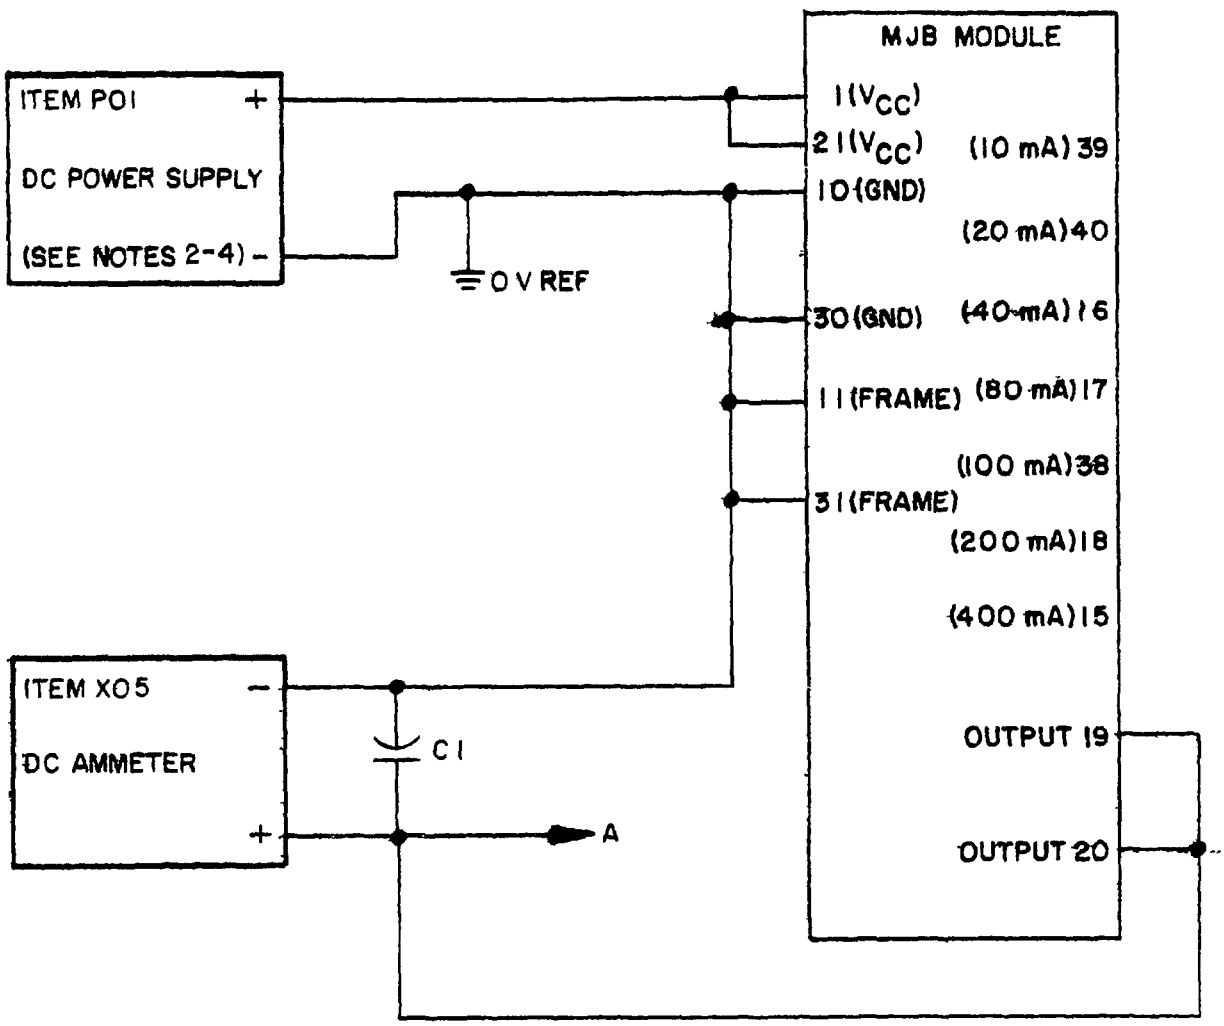

NOTES:
1. C1 = 0.47 µF ±20%, 15 Vdc.
2. For test condition H, set item P01 to 4.5 V ±1%.
3. For test condition J, set item P01 to 5.0 V ±1%.
4. For test condition K, set item P01 to 5.5 V ±1%.

FIGURE 10 Programmability test circuit for table X.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T17:36Z
Check the source to verify that this is the current version before use.

TABLE XI. Regulation check test.

Test condition	Parameter	Initial limits 25°±5°C ambient		Unit	Test figure
		Min	Max		
L	Regulation check	-5	5	mA	11


TABLE XII. Recovery time and power supply transient amplitude test.

Test condition	Parameter	Connect	Initial limits 25°±5°C ambient		Unit	Test figure
		A to pin	Min	Max		
M	Recovery time	19,20	0	15	µs	12,13
N	Power supply transient amplitude	1,21	0.0	1.5	V	12,13

TABLE XIII. Accuracy (minimum and maximum load) test.

Test condition	Parameter	Initial limits 25°±5°C ambient		Unit	Test figure
		Min	Max		
P1	Accuracy (minimum load)	533	567	mA	14
P2	Accuracy (maximum load)	533	567	mA	14

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T17:36Z
Check the source to verify that this is the current version before use.

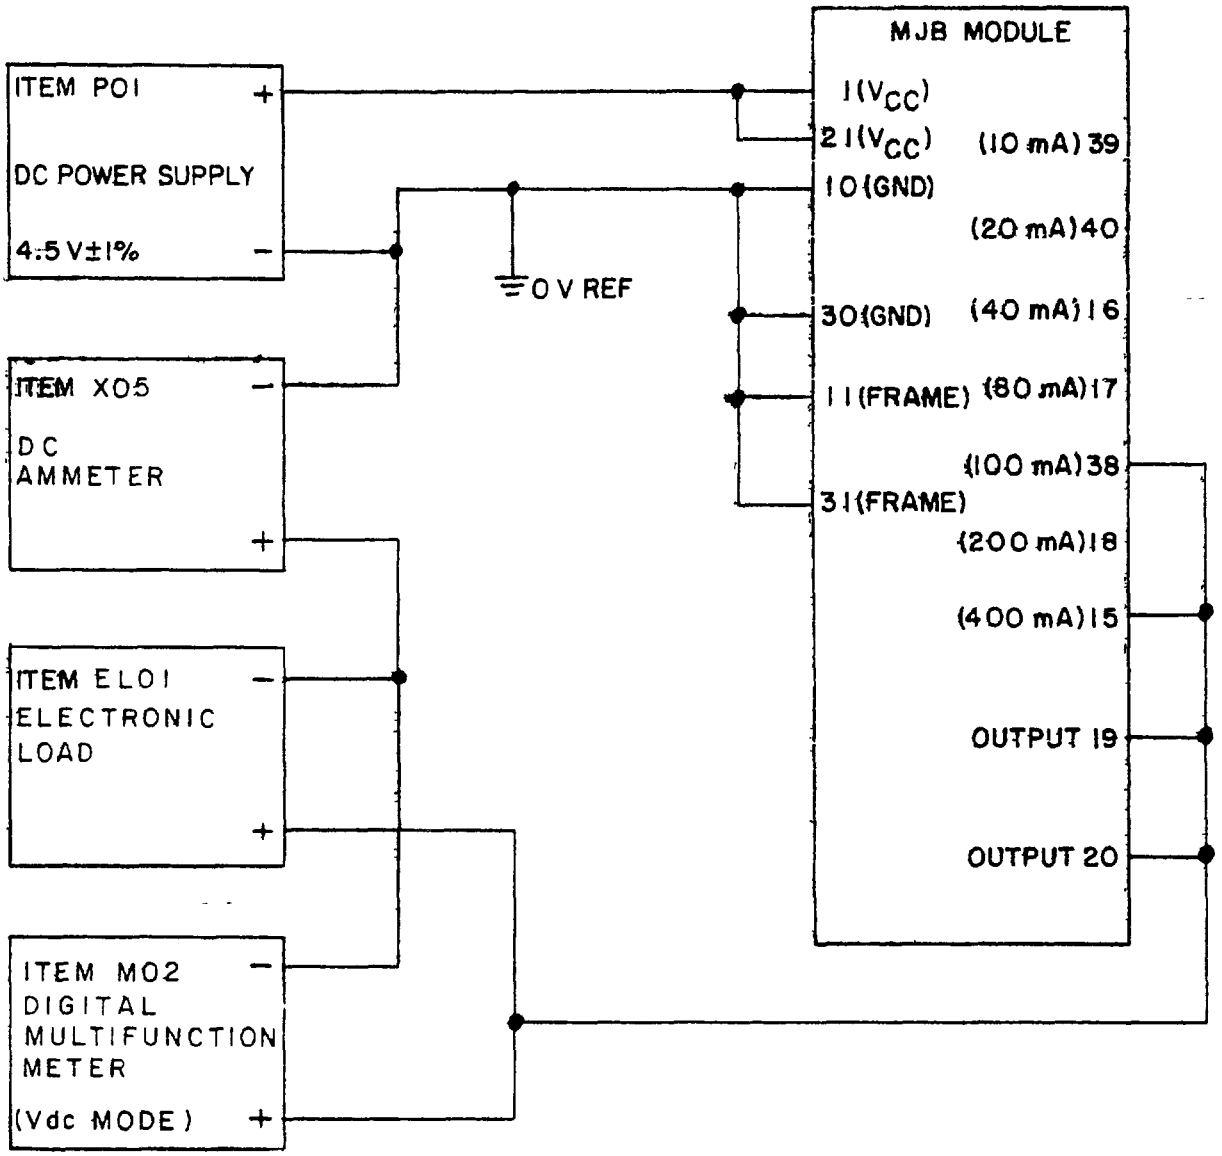


NOTES

1. Adjust item EL01 (use A/V mode) for a voltage drop measured on item M02 of 1.25 V ±1% and measure the current I_1 on item X05
2. Adjust item EL01 (use A/V mode) for a voltage drop measured on item M02 of 0.80 V ±1%. and measure the current I_2 on item X05
3. Test condition L = $I_2 - I_1$.
4. Table II percent regulation = $\frac{I_2 - I_1}{500} \times 100$.

FIGURE 11. Regulation check test circuit for table XI.

Source: https://assist.dla.mil -- Downloaded: 202640-20T17:36Z
Check the source to verify that this is the current version before use.

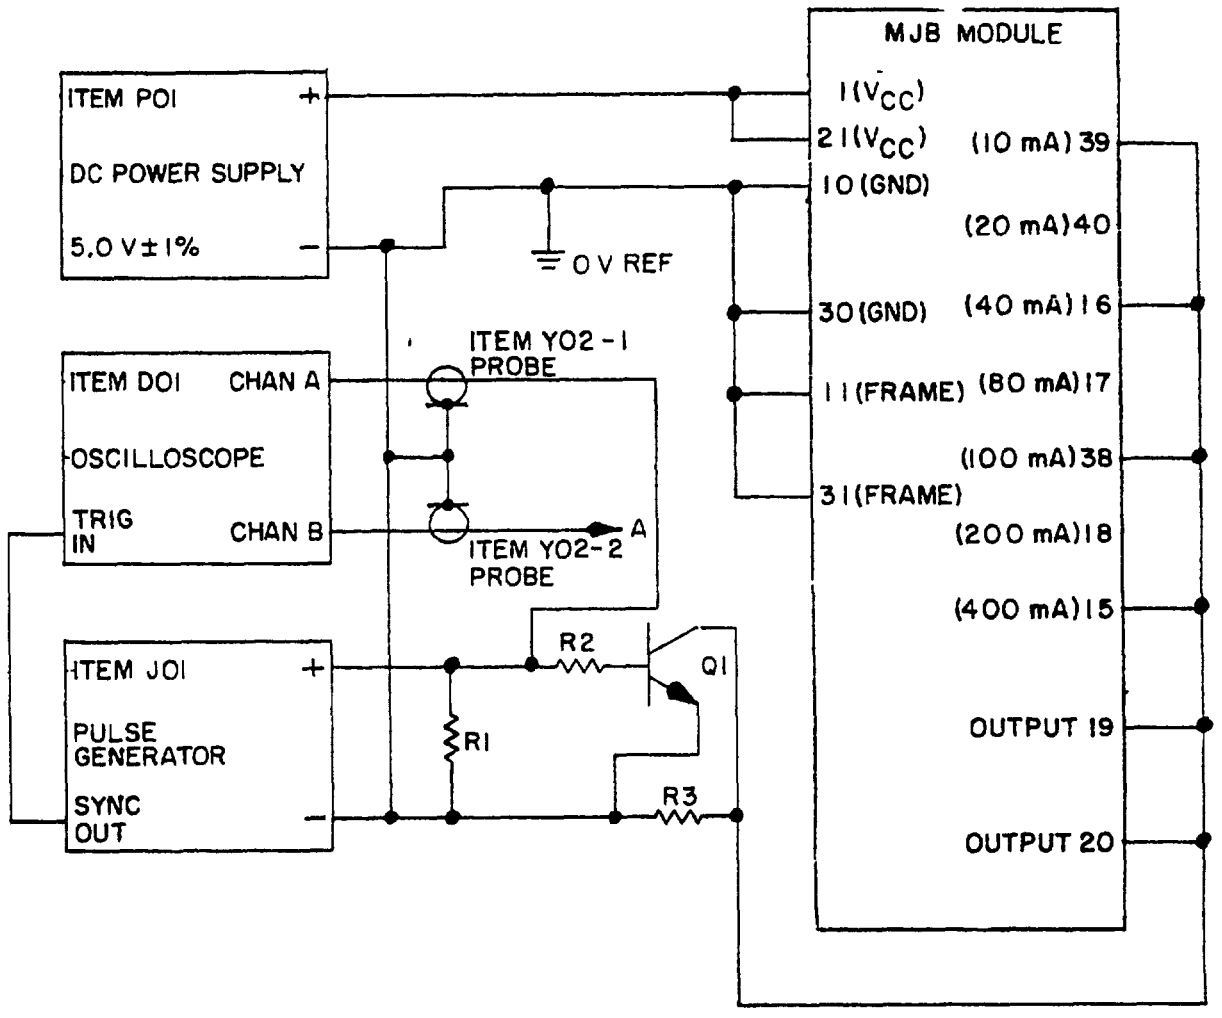


NOTES.

1. R1 = 51Ω ±5%, 1/2 W.
2. R2 = 100Ω ±10%, 1/4 W.
3. R3 = 4.1Ω ±1%, 2 W.
4. Q1 = 2N3737, or equivalent.

FIGURE 12. Recovery time and power supply transient amplitude test circuit for table XII.


Source: https://assist.dla.mil -- Downloaded: 202640-20T17:36Z
Check the source to verify that this is the currentversion before use.

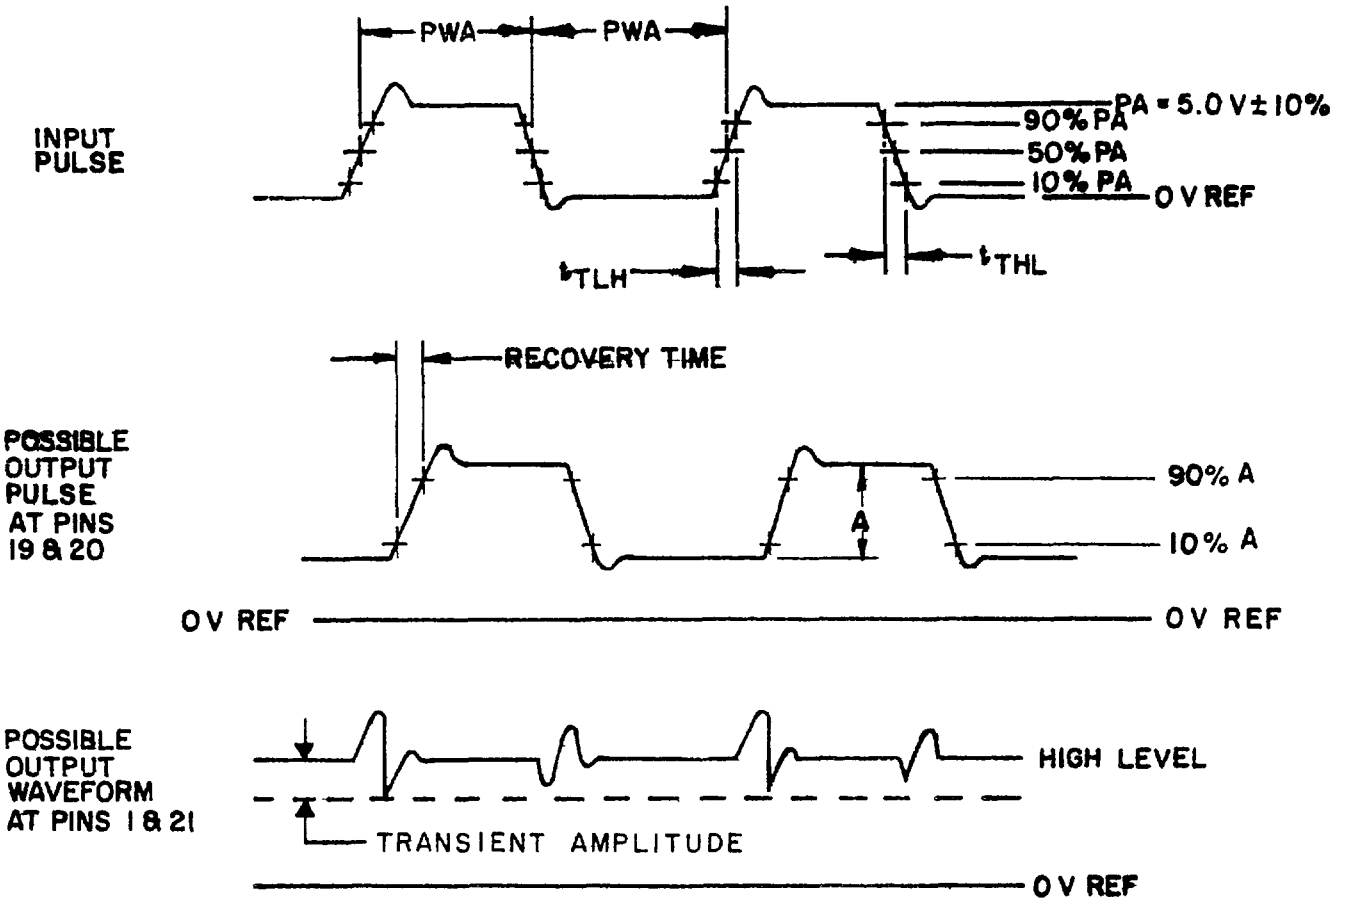

NOTE: Input waveform setup:
PA = 5.0 Vdc ±10%
PWA = 500 µs ±10%
$t_{TLH} = t_{THL}$ = 250 ns ±10%.

FIGURE 13. Recovery time and power supply transient amplitude test circuit waveforms for table XII.

Source: https://assist.dla.mil -- Downloaded: 202610-20T17:36Z
Check the source to verify that this is the current version before use.

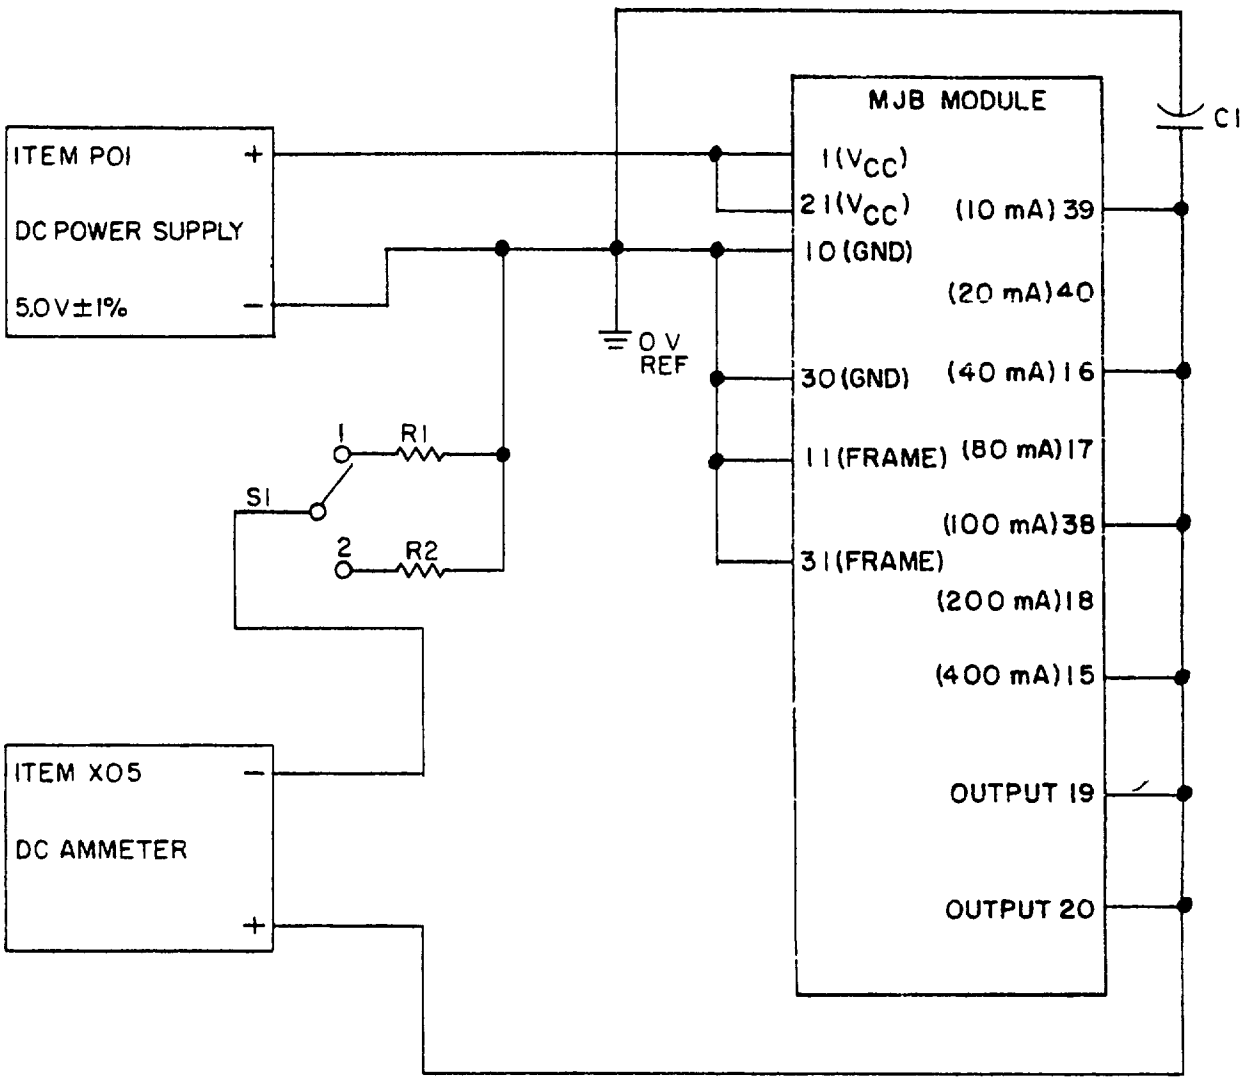

NOTES
1. R1 = 2.34Ω ±1%, 1 W
2. R2 = 1.1Ω ±1%, 1 W.
3. C1 = 0.47 µF ±20%, 15 Vdc
4. Place switch S1 in position 1 for test condition P1 and position 2 for test condition P2

FIGURE 14. Accuracy (minimum and maximum load) test circuit for table XIII.

Source: https://assist.dla.mil -- Downloaded: 20260-20T17:36Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.

NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE: MIL-M-28787/307A(EC) - Modules, Standard Electronic Regulator, Current, Programmable, Analog, Key Code MJR

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*

TELEPHONE NO.

DATE

DD FORM 1 OCT 76 1426

EDITION OF 1 JAN 72 MAY BE USED UNTIL EXHAUSTED

Source: https://assist.dla.mil -- Downloaded: 202640-20T17:36Z
Check the source to verify that this is the current version before use.