NOT MEASUREMENT SENSITIVE

MIL-DTL-15665/69
27 June 1996
SUPERSEDING
MIL-I-3575/58C
23 May 1995

DETAIL SPECIFICATION SHEET

# INSIGNIA, SERVICE HAT, OFFICERS, NATIONAL OCEANIC AND ATMOSPHERIC ADMINISTRATION

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-15665 listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation.

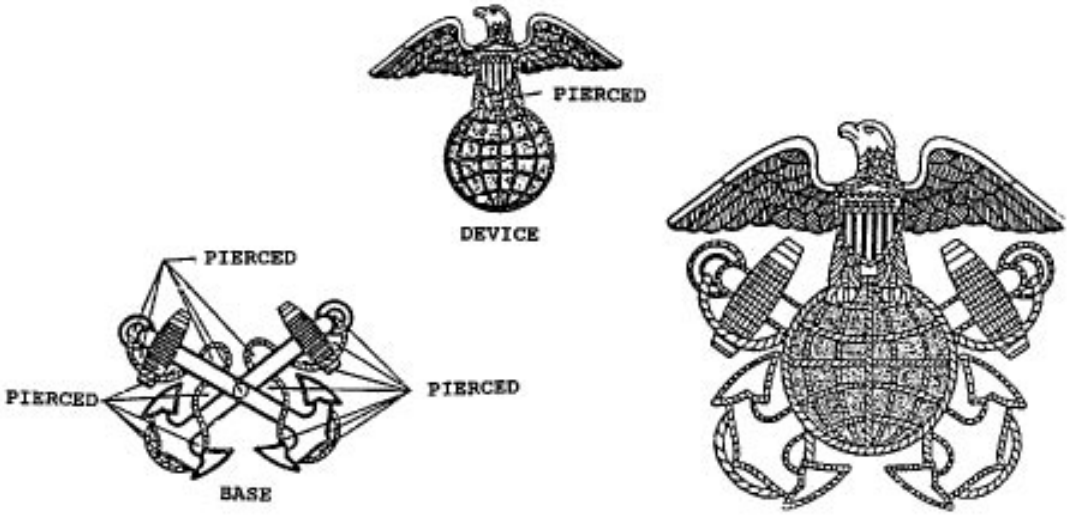


MATERIAL: Red Brass

FINISH:
BASE: Nickel Plated, Mirror-like Polished and shall match TIOH Metal Finish Chip Number 16.
DEVICE:
EAGLE AND GLOBE: Gold Plated, Matte Finish, Polished Highlights and shall match TIOH Metal Finish Chip Number 8.
SHIELD: Nickel Plated, Matte Finish, Polished Highlights and shall match TIOH Metal Finish Chip Number 18.

AMSC N/A FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.


Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:52Z
Check the source to verify that this is the current version before use.

DIMENSIONS:
  BASE:
    HEIGHT (Overall): 1-5/8 inches (4.13 cm) (REF)
    WIDTH (Overall): 2-3/16 inches (5.56 cm) (REF)
    THICKNESS (Minimum): 0.030 inch (0.076 cm)
  DEVICE:
    HEIGHT (Overall): 2-1/16 inches (5.24 cm) (REF)
    WIDTH (Overall): 2-7/16 inches (6.19 cm) (REF)
    THICKNESS (Minimum): 0.045 inch (0.114 cm)

NOTES:
1. The term (REF) refers to measurements taken from the Government furnished hub or die.

2. A full forcer shall be used to bring up the design of both the base and the device.

3. Piercing shall be as indicated.

4. The base shall be spherically dapped to fit the contour of the globe on the device.

5. The base shall contain a 5/32 inch ± 1/64 inch (0.40 cm ± 0.04 cm) diameter hole centered at the intersection of the crossed anchors.

6. The device shall have two screw posts 1/8 inch ± 1/64 inch (0.32 cm ± 0.04 cm) in diameter and 7/16 inch ± 1/64 inch (1.11 cm ± 0.04 cm) long soldered on the vertical center line. The top post shall be located 11/16 inch ± 1/64 inch (1.75 cm ± 0.04 cm) below the top of the device and the lower post shall be located 1/2 inch ± 1/64 inch (1.27 cm ± 0.04 cm) above the bottom of the device. The post shall have a 40 UNC-2A thread.

7. The device shall be mounted to the base by inserting the lower screw post through the hole at the intersection of the crossed anchors and locking it in place with a threaded prong washer. A thumb nut 5/8 inch ± 1/64 inch (1.59 cm ± 0.04 cm) in diameter shall then be mounted on each screw post.

8. Shield may be rhodium plated, mirror-like polished at the option of the manufacturer.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodian:
Army - IH

Preparing activity:
Army - IH

Review activities:
DLA - CT

(Project No. 8455-0844)


Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:52Z
Check the source to verify that this is the current version before use.