NOT MEASUREMENT SENSITIVE


MIL-DTL-15665/69C
1 January 2021
SUPERSEDING
MIL-DTL-15665/69B
15 March 2016

DETAIL SPECIFICATION SHEET

# INSIGNIA, SERVICE CAP, OFFICERS, NATIONAL OCEANIC AND ATMOSPHERIC ADMINISTRATION

This specification is approved for use by all
Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the latest issue of MIL-DTL-15665.

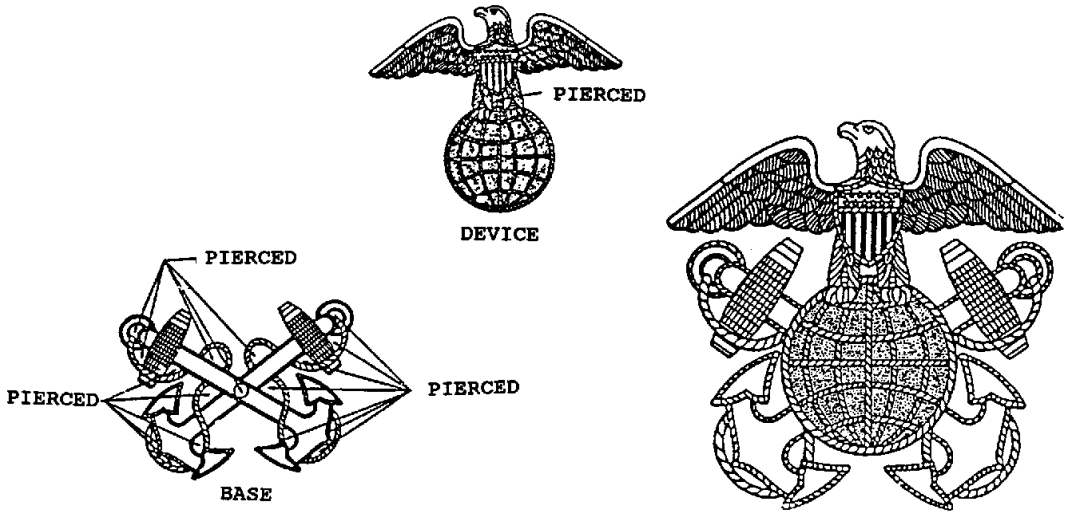


MATERIAL: Red Brass 85/15 (UNS Alloy No. C- 230)

FINISH:
BASE: Nickel Plated, Mirror-like Polished, and shall match The Institute of Heraldry (TIOH) Metal Finish Chip Number 16.
DEVICE:
EAGLE AND GLOBE: 24K Gold Plated, Matte Finish, Polished Highlights and shall match TIOH Metal Finish Chip Number 8.
HIELD: Nickel Plated, Matte Finish, Polished Highlights and shall match Metal Finish Chip Number 18.

AMSC N/A FSC 8455

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:52Z
Check the source to verify that this is the current version before use.

DIMENSIONS:
BASE:
HEIGHT (Overall): 1-5/8 inches (REF)
WIDTH (Overall): 2-3/16 inches (REF)
THICKNESS (Minimum): 0.030 inch ± 0.005 inch
DEVICE:
HIEGHT (Overall): 2-1/16 inches (REF)
WIDTH (Overall): 2-7/16 inches (REF)
THICKNESS (Minimum): 0.045 inch ± 0.005 inch

ATTACHING DEVICE:

1. The device shall have two screw posts 1/8 inch ± 1/64 inch in diameter and 7/16 inch ± 1/64 inch long soldered on the vertical center line. The top post shall be located 11/16 inch ± 1/64 inch below the top of the device and the lower post shall be located 1/2 inch ± 1/64 inch above the bottom of the device. The post shall have a 40 UNC-2A thread.

2. The device shall be mounted to the base by inserting the lower screw post through the hole at the intersection of the crossed anchors and locking it in place with a threaded prong washer. A thumb nut 5/8 inch ± 1/64 inch in diameter shall then be mounted on each screw post.

NOTES:

1. The term (REF) refers to measurements taken from the Government furnished hub or die.

2. A full forcer shall be used to bring up the design of both the base and the device.

3. Piercing shall be as indicated.

4. The base shall be spherically dapped to fit the contour of the globe on the device.

5. The base shall contain a 5/32 inch ± 1/64 inch diameter hole centered at the intersection of the crossed anchors.

6. Shield may be rhodium plated, mirror-like polished at the option of the manufacturer.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodian:
Army - IH

Preparing activity:
Army - IH

Review activity:
DLA - CT

(Project No. 8455-2021-168)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:52Z
Check the source to verify that this is the current version before use.