
INCH-POUND
A-A-59326/14A
May 1, 2003
SUPERSEDING
A-A-59326/14
September 25, 1998

COMMERCIAL ITEM DESCRIPTION SPECIFICATION SHEET

REDUCER, EXTERNAL PIPE THREAD BY FEMALE, TYPE XIII

The General Services Administration has authorized the use of this commercial item description, for all federal agencies.

The complete requirements for procuring couplings described herein shall consist of this document and the latest issue in effect of A-A-59326A.

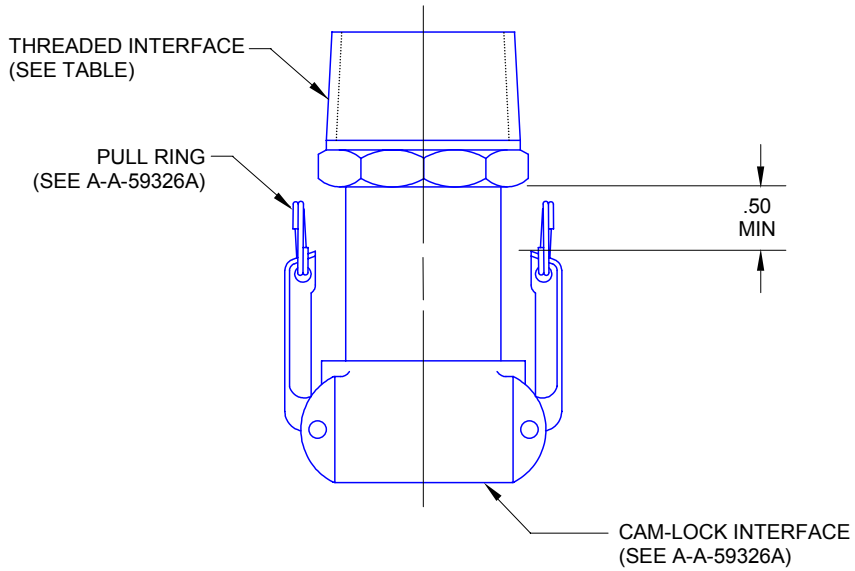

NOTES: 1. The size of the coupling assembly shall conform to table 1.
2. Dimensions are in inches.

FIGURE 1. Reducer.

Beneficial comments, recommendations, additions, deletions, clarifications, etc., and any other data which may improve this document should be sent by letter to: US Army Tank-automotive and Armaments Command, ATTN: AMSTA-TR-D/210, 6501 E. 11 Mile Road, Warren, MI 48397-5000.

AMSC N/A FSC 4730

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:11Z
Check the source to verify that this is the current version before use.

1. SCOPE. This specification covers a female by external pipe thread reducer, type XIII, to be used in conjunction with fittings having an internal pipe thread and male type cam locking coupling halves.

2. CLASSIFICATION. The size of the reducers if designated in table 1.

TABLE 1. Reducer size.

Dash Number	Threaded End Size - TPI	Cam-Lock End Nom. Size	Gasket Size code
1	4 - 8	3	-8
2	3 - 8	2	-6
3	2 - 11 ½	1	-3
4	6 - 8	4	-9
5	1 ½ - 11 ½	2	-6
6	2 - 11 ½	1 ½	-5
7	1 - 11 ½	4	-9
8	1 - 11 ½	1 ½	-5
9	1 - 11 ½	2	-6

3. SALIENT CHARACTERISTICS. The following characteristics differ from those listed in A-A-59326A.

3.1 Accessories. The coupling shall be supplied with pull rings and gasket indicated.

3.2 Threads. The coupling threads shall conform to National Tapered Pipe Thread per ANSI/ASME B1.20.1.

3.3 Hydrostatic test pressure. The ½-inch through 6-inch couplings shall withstand a hydrostatic test pressure of 300 pounds per square inch gage (psig). The 6-inch, 75 psi rated couplings shall withstand a hydrostatic test pressure of 150 psig.

3.4 Working pressure. The ½-inch through 4-inch couplings shall be rated for 150 pounds per square inch working pressure. The 6-inch couplings shall be rated for 75 psi or 150 psi working pressure as appropriate.

4. NOTES.

4.1 Part Identification Number (PIN). The following PIN procedure is for government purposes and does not constitutes a requirement for the contractor. This example describes a part numbering system for specification sheet A-A-59326/14A.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:11Z
Check the source to verify that this is the current version before use.

AA59326A/14-4-A-1; /14 indicates a Female by External Pipe Thread Reducer, -4 indicates a 4 – inch cam lock nominal size with a six inch threaded end; -A indicates an Aluminum body; and -1 indicates a style 1 coupling.

Material: A - Aluminum
B - Copper Alloy (Brass or Bronze)
BA - Aluminum Bronze
SS - Stainless Steel

Style 1 - Style 1 couplings do not require the incorporation of a positive locking mechanism to lock the cam arms in the closed position but the cam arms will stay in the closed position when the coupling halves are assembled.

Style 2 - Style 2 couplings will incorporate a positive locking mechanism to lock the cam arms in the closed position when the coupling halves are assembled. The locking mechanism will be manually released (the release doesn't have to stay in the released position) before the cam arms can be moved to the open position.

4.2 International standardization. Certain provisions of this specification (dimensions) are the subject of international standardization agreement (see A-A-59326A).

MILITARY INTERESTS:

Custodians:
Army - AT
Navy - YD
Air Force – 99

Review Activities:
Army - AV, GL
Navy - MC, SH
Air Force - 71
DLA - CC

CIVIL AGENCY COORDINATING ACTIVITY:
GSA-FSS

Preparing Activity:
Army - AT

(Project 4730-2029-014)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:11Z
Check the source to verify that this is the current version before use.