INCH-POUND
A-A-59326/14B
April 21, 2011
SUPERSEDING
A-A-59326/14A
May 1, 2003

COMMERCIAL ITEM DESCRIPTION SPECIFICATION SHEET

REDUCER, EXTERNAL PIPE THREAD BY FEMALE, TYPE XIII

The General Services Administration has authorized the use of this commercial item description for all federal agencies.

The complete requirements for procuring couplings described herein shall consist of this document and the latest issue in effect of A-A-59326.

1. SCOPE. This specification sheet covers an External Pipe Thread by Female Cam-locking type Reducer, Type XIII, to be used in conjunction with fittings having an internal pipe thread and/or male type cam locking coupling halves.

2. CLASSIFICATION. The size of the reducers if designated in table I.

TABLE I. Reducer size.

Dash Number	Threaded End Size - TPI	Cam-lock End Nom. Size	Gasket Size code
1	4 - 8	3	-8
2	3 - 8	2	-6
3	2 - 11 ½	1	-3
4	6 - 8	4	-9
5	1 ½ - 11 ½	2	-6
6	2 - 11 ½	1 ½	-5
7	1 - 11 ½	3	-8
8	1 - 11 ½	1 ½	-5
9	1 - 11 ½	2	-6

Beneficial comments, recommendations, additions, deletions, clarifications, etc. and any data that may improve this document should be sent to DAMI_STANDARDIZATION@conus.army.mil or U.S. Army RDECOM, Tank Automotive Research, Development and Engineering Center, ATTN: RDTA-EN/STND/TRANS MS #268, 6501 E. 11 Mile Road, Warren, MI 48397-5000. Since contact information can change, you may want to verify the currency of this address information using the ASSIST Online database at https://assist.daps.dla.mil.

AMSC N/A FSC 4730

Distribution Statement A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:11Z
Check the source to verify that this is the current version before use.

3. SALIENT CHARACTERISTICS. The following characteristics may differ from those listed in the latest issue of A-A-59326.

3.1 Accessories. The coupling shall be supplied with pull rings and gasket.

3.2 Threads. The coupling threads shall conform to National Tapered Pipe Thread per ANSI/ASME B1.20.1.

3.3 Hydrostatic test pressure. The 1-inch through 4-inch couplings shall withstand a hydrostatic test pressure of 300 pounds per square inch gage (psig). The 6-inch, 75 psi rated couplings shall withstand a hydrostatic test pressure of 150 psig. The 6-inch, 150 psi rated couplings shall withstand a minimum hydrostatic test pressure of 225 psig.

3.4 Working pressure. The ½-inch through 4-inch couplings shall be rated for 150 pounds per square inch working pressure. The 6-inch couplings shall be rated for 75 psi or 150 psi working pressure as appropriate.

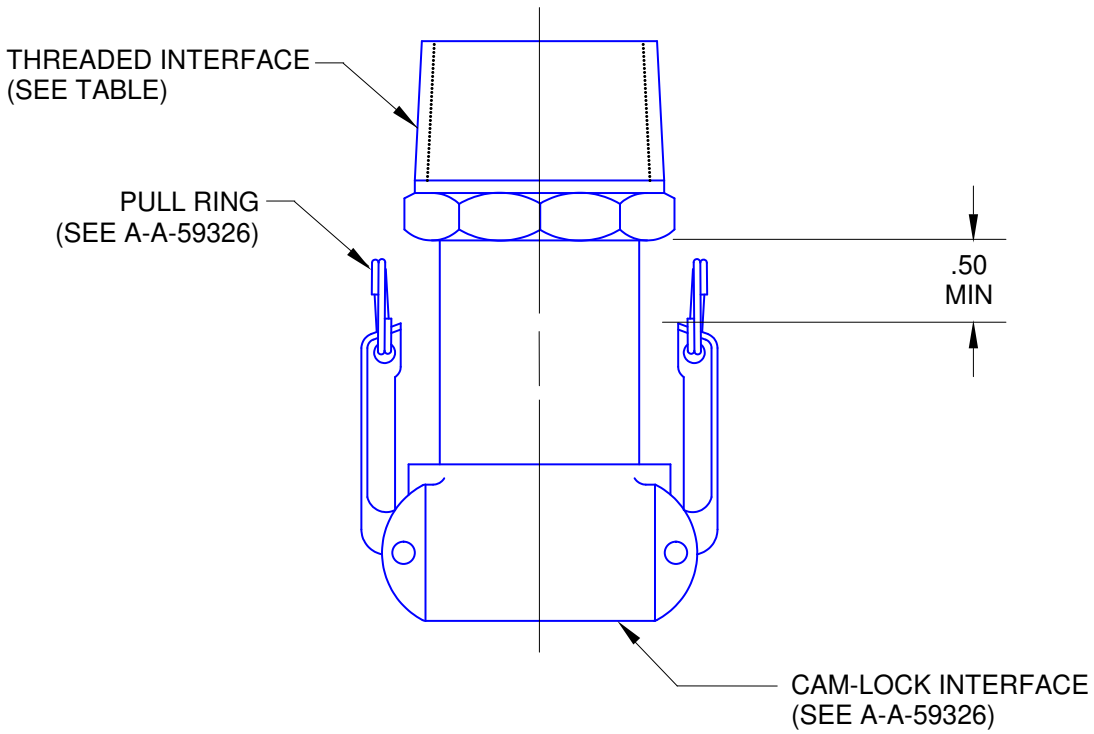


FIGURE 1. Reducer, external pipe thread by female.

NOTES: 1. The size of the coupling assembly shall conform to table I.
2. Dimensions are in inches.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:11Z
Check the source to verify that this is the current version before use.

4. NOTES

4.1 Part Identification Number (PIN). The following PIN procedure is for government purposes and does not constitute a requirement for the contractor. This example describes a part numbering system for specification sheet A-A-59326/14

AA59326/14-4-A-1; where /14 indicates a External Pipe Thread by Female cam-lock Reducer, -4 indicates a 6-inch threaded end by 4 – inch cam locking end, -A indicates an Aluminum body and -1 indicates a style 1 coupling.

Material: A - Aluminum Alloy
B - Copper Alloy (Brass or Bronze)
BA - Aluminum Bronze
SS - Stainless Steel

Style 1 - Style 1 couplings do not require the incorporation of a positive locking mechanism to lock the cam arms in the closed position but the cam arms shall stay in the closed position when the coupling halves are assembled.

Style 2 - Style 2 couplings shall incorporate a positive locking mechanism to lock the cam arms in the closed position when the coupling halves are assembled. The locking mechanism shall be manually released (the release doesn't have to stay in the released position) before the cam arms can be moved to the open position.

MILITARY INTERESTS:

Custodians:
Army - AT
Navy - YD
Air Force - 99

Review Activities:
Army - AV, GL
Navy - MC, SH
Air Force - 71
DLA – CC

CIVIL AGENCY COORDINATING ACTIVITY:
GSA - FAS

Preparing Activity:
Army - AT

(Project 4730-2011-026)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:11Z
Check the source to verify that this is the current version before use.